



Shade – CUBESHADE SD165

Material: hot-pressed, glassfibre reinforced polyester

Colour: light grey RAL 7032, UV-resistant

Low flammability and self-extinguishing

Design

- GO antistatic to avoid electrostatic charges according to DIN EN IEC 60079-0

1 Application

Simple shielding of instruments and fittings designed to ensure protection from:


- Sun light (overheating)
- Dirt accumulation
- Exposure to atmospheric conditions
- Mechanical damage

2 Features

- The drip lip all around and cone shaped design allow rain and melt water to run off easily.
- Large lateral surfaces provide excellent protection from the sun, especially in case of low sun angles.
- Heat-insulating material preventing the heat generated by solar radiation to be transferred.
- Stackable for space-saving transport and storage due to tapered side walls.
- Increased stability by reinforced ribs in the back wall.



3 Available Types and Dimensions

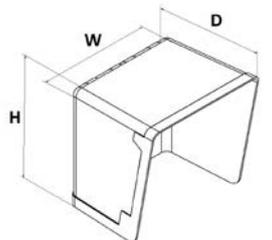
	CUBESHADE SD165
	H x W x D 600 x 550 x 500

Shade – CUBESHADe SD165


4 Mounting Accessories

4.1 Pipe Stands

Pipe Stands ST17-2, 1700 mm high

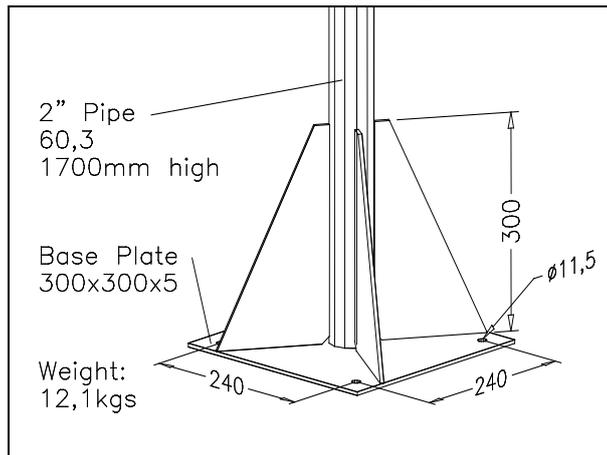


4.2 Mounting Brackets RS..

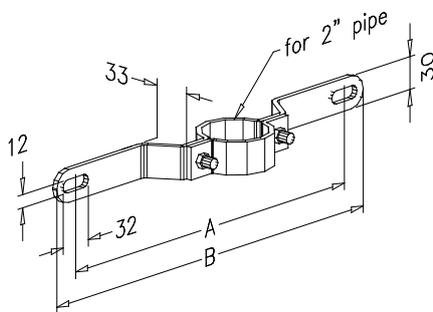


For CUBESHADe	RS Type	A	B	Weight
	KCBA-100S (set)	340	390	0,75

4.3 Mounting Rails

Form A

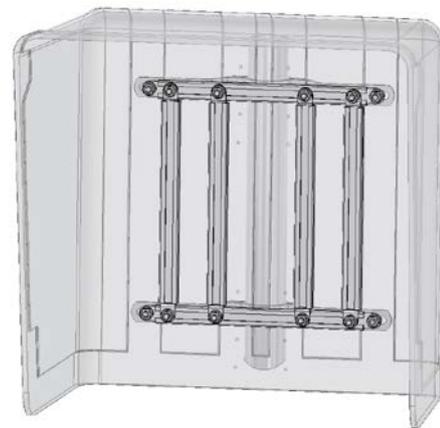

Form B

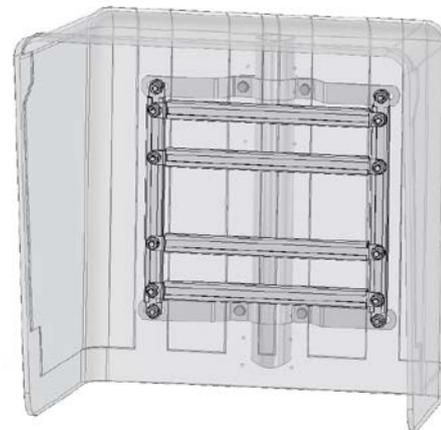

For Cubeshade	Form A	Form B
	4x MS 100 Q 2x MS 100 QS	4x MS 100 Q 2x MS 100 QS

For further Mounting Rails see data sheet [KD171](#)