



Sunshade SD 18 - linkable

Material: hot-pressed, glassfibre reinforced polyester

Color: light gray

UV-resistant

Low flammability and self-extinguishing

Option

- GO antistatic to avoid electrostatic charges according to DIN EN IEC 60079-0

1 Application


Simple shielding of instruments and fittings designed to ensure protection from:

- Sun light (overheating)
- Dirt accumulation
- Exposure to atmospheric conditions
- Mechanical damage


2 Features

- Horizontally linked pieces without transitions
- Backplane designed as flat mounting plate
- Minimal space requirements
- Particularly stable material: long-glassfibre reinforced polyester with thermal insulation properties
- Optional mounting material for attachment to:
 - Transmitter (all vendors)
 - C mounting rails
 - Pipe stands

3 Dimensions

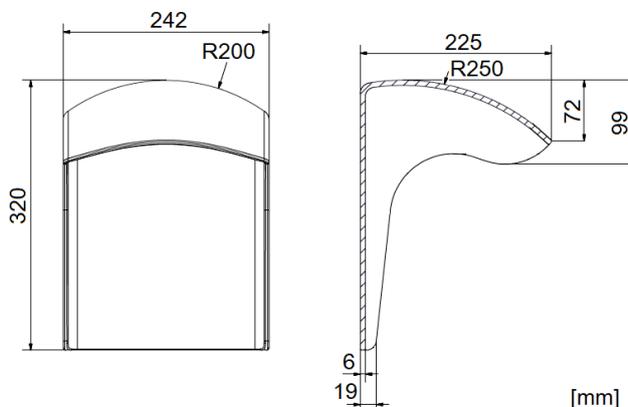

Application example: SD 18 mounted on transmitter by means of INTERTEC bracket

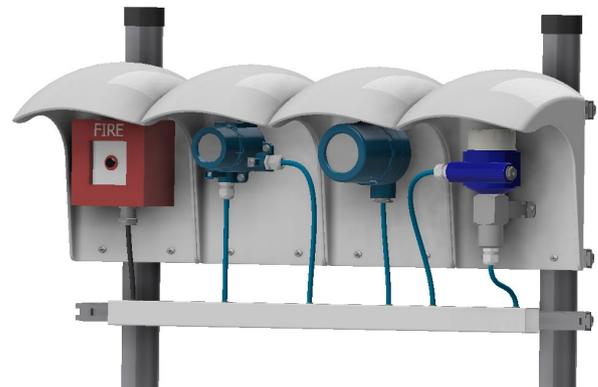

Application example: SD 18 linked together on C-rail