

## MULTIBOX 60

Made of hot-pressed glass fibre reinforced polyester (GRP)  
Two-part construction, equipment can be installed in either the shallow or deep part.  
Stackable design for space saving storage and transport  
Low flammability and self-extinguishing  
4 mounting elements in stainless steel

- Colour: light grey, RAL 7032
- EPDM seal
- Weight approx. 8kg
- UV- resistant
- Protection class IP65



For further technical details → data sheet [KD015](#) & [KD112](#)

Dimensions      Height      Width      Depth  
in mm (approx.)    640    x    440    x    250

| Heat transition coefficient K | without window | with window |
|-------------------------------|----------------|-------------|
| standard                      | 4,5 W/K        | 5,1 W/K     |
| arctic-GRP                    | 1,3 W/K        | 1,9 W/K     |

**Designs** (Locking-type see data sheet [KD152](#))

- ☐ **SV4** 4 clasps in stainless steel (standard)
- ☐ **SE2** 2 hinges and 2 clasps in stainless steel, with angle for optional padlock

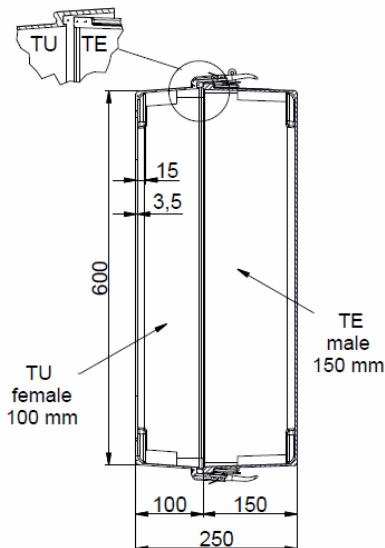

**Lid Propstay** (only design SE)

- ☐ **DF** in galvanized steel
- ☐ **DFVA** in stainless steel

**Window**

- ☐ **FA** acrylic glass window
- ☐ **FS** safety glass window

**arctic additional Insulation**

PU-foam, not stackable

- ☐ **arctic-GRP** GRP lining

**Explosion Protection**

- ☐ **GO** antistatic to avoid electrostatic charges according to DIN EN IEC 60079-0
- ☐ **Ex p** preparation for pressurization according to DIN EN IEC 60079-2

**Protection Class**

- ☐ **IP66**      ☐ **IP67**      ☐ **IP68**
- ☐ **CSA Enclosure Type 4X (NEMA 4X)**

**Vents and Drains** (see data sheet [KD184](#))

- ☐ **LF** Labyrinth filter IP44
- ☐ **DV** Vents and Drains IP66

