




# Process to Instrument and Piping Valves Double Block and Bleed (DBB)

Monoflange and Pro-Bloc® Valves  
Including Low Emissions and API 6A Valves



ENGINEERING YOUR SUCCESS.

# Contents

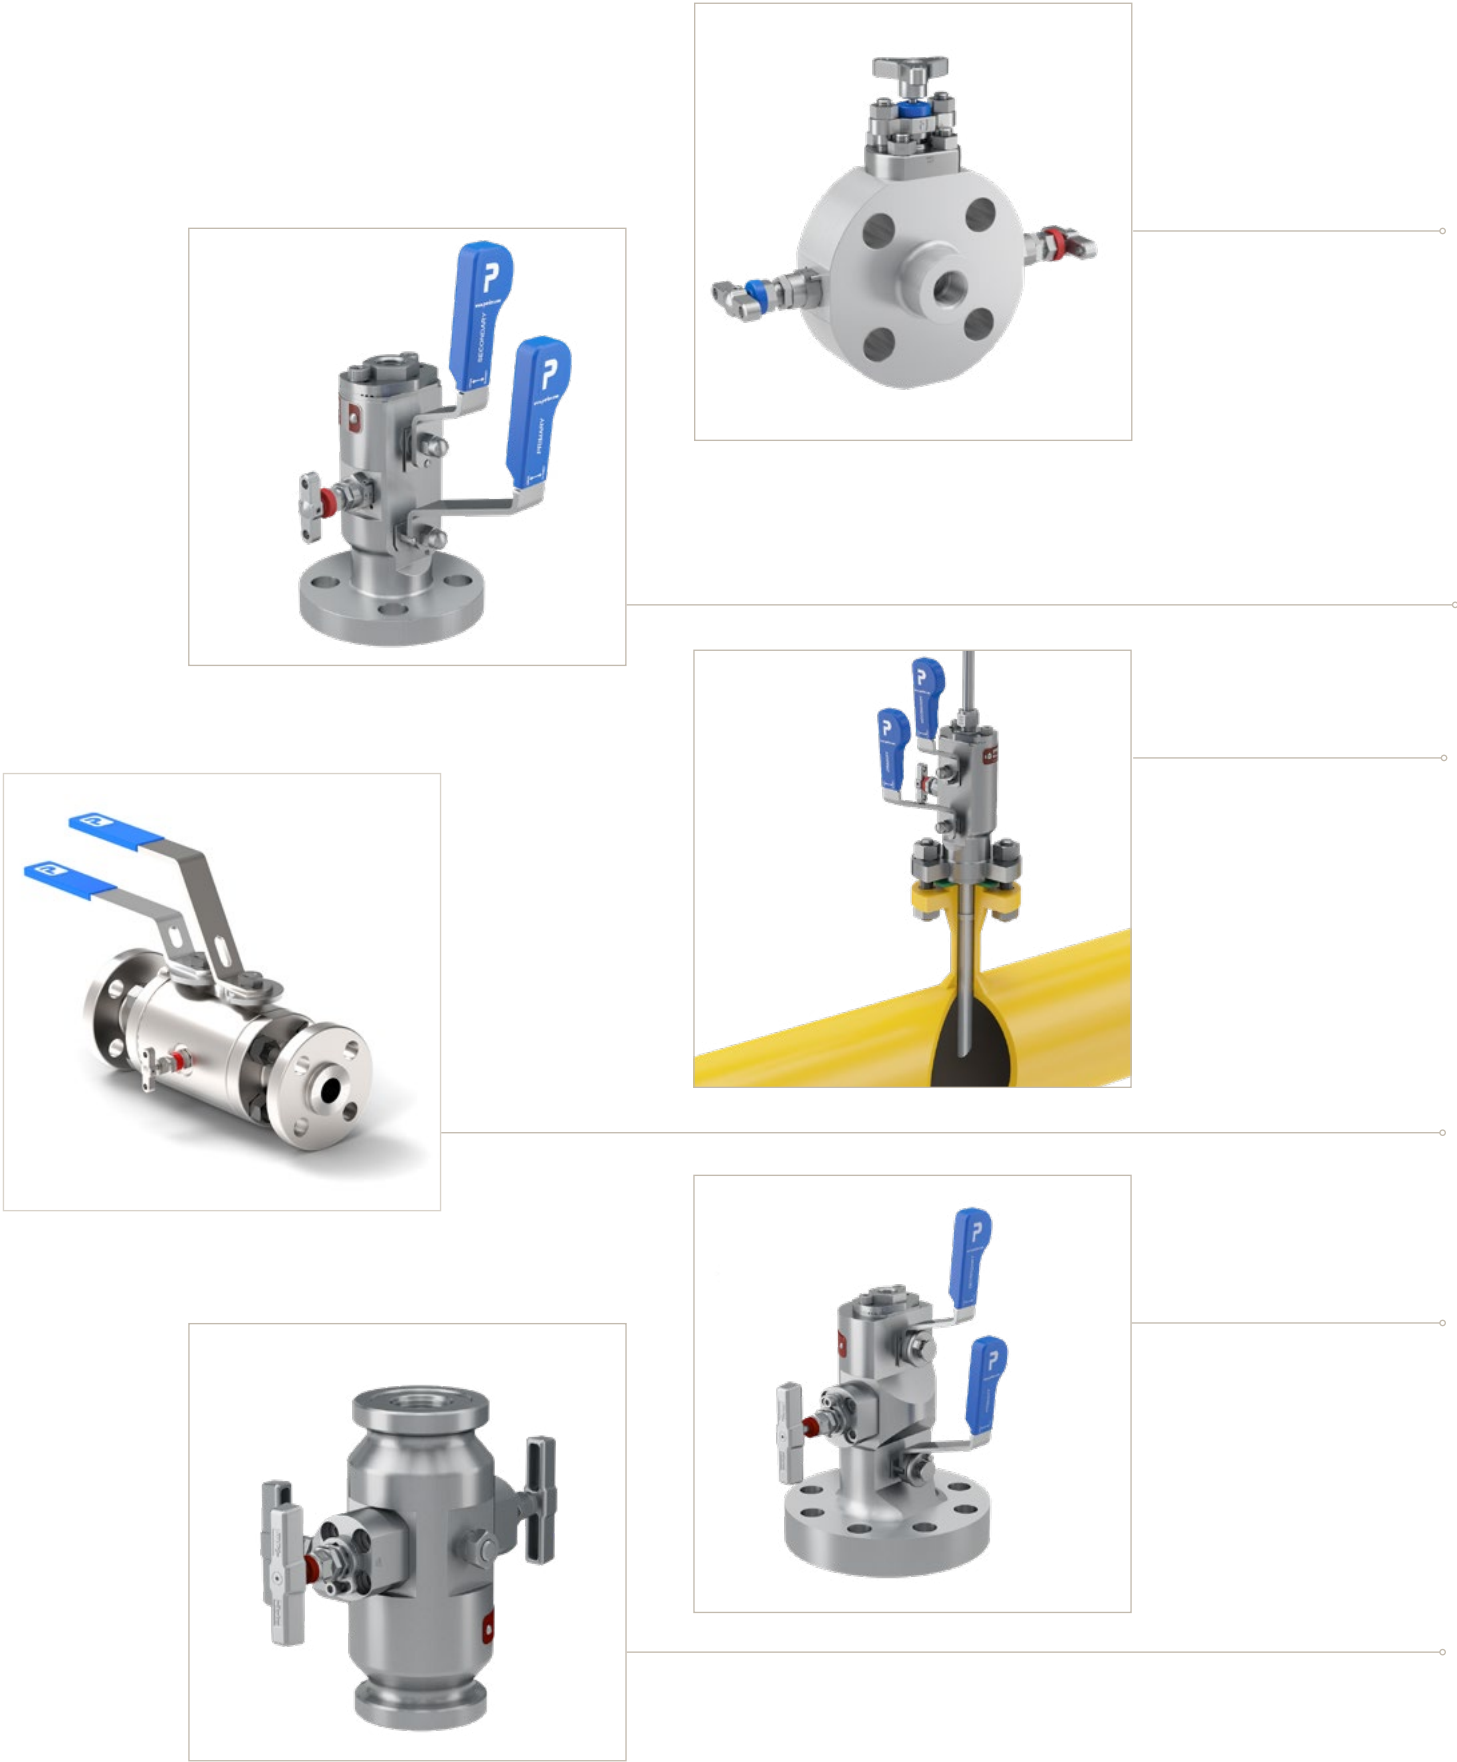

<b>Introduction .....</b>	<b>5</b>
<b>General Technical Information .....</b>	<b>6</b>
Design .....	6
Materials of Construction .....	6
Flange Connections.....	7
Meeting the ISO Standard .....	9
<b>Monoflange .....</b>	<b>12</b>
<b>Monoflange MF Series .....</b>	<b>12</b>
Overview .....	12
Technical Information .....	14
Dual Outlet Option for Vertical or Horizontal Mount.....	15
Gauge Mounting .....	15
Dual Instrument Mounting .....	16
Close-Coupled Techniques for Instrument Mounting.....	17
Ordering Information .....	18
<b>Low Emissions Monoflange FEMF Series .....</b>	<b>20</b>
Low Emissions Head Designs .....	20
Technical Specifications .....	21
Ordering Information .....	22
<b>Pro-Bloc® - Double Block and Bleed Valve (DBB) .....</b>	<b>24</b>
<b>Pro-Bloc® - Modular Single Piece DBB Valve EP Series - EEMUA 182 Design Conformance .....</b>	<b>24</b>
Overview .....	24
Technical Information .....	25
Standard Head Designs .....	28
Ordering Information .....	30
<b>Pro-Bloc® - Modular Single Piece DBB Valve - Sampling and Injection Applications - ESP and EJP Series .....</b>	<b>32</b>
Overview .....	32
Ordering Information .....	34
<b>Low Emissions Pro-Bloc® - Modular Single Piece DBB Valve .....</b>	<b>36</b>
10mm Bore - FM Series.....	36
Technical Specifications .....	36
Low Emissions needle valve head design.....	38
Ordering Information .....	40
15 and 20 mm Bore, Bolted Bonnet Design - FE Series.....	42
Technical Specifications .....	42
Low Emissions needle valve head design.....	44
Ordering Information .....	46
<b>Pro-Bloc® - Three Piece DBB Valve - Floating Ball - FP Series .....</b>	<b>48</b>
Overview .....	48
Technical Specifications .....	48
Ordering Information .....	50
Pro-Bloc® - Three Piece DBB Valve .....	52
<b>Pro-Bloc® - Three Piece DBB Valve - Trunnion Mount - TP Series .....</b>	<b>52</b>
Overview .....	52
Technical Specifications .....	52
Ordering Information .....	54
<b>Pro-Bloc® - Modular Single Piece DBB Valve - API 6A .....</b>	<b>56</b>
API 6A Standard - Introduction .....	56
API 6A Codes and Practises .....	56
5K and 10K Valves - API 6A.....	60
Overview.....	60
Technical Specifications .....	60
Ordering Information - 5K and 10K .....	63
Live Loaded 5K,10K and 15K Valves - API 6A .....	64
Overview.....	64
Technical Specifications .....	64
Ordering Information - 5K, 10K and 15K .....	68
Grayloc® Hub Connection - Ball - Needle Design .....	69
Live Loaded - Grayloc® Hub Connection - Ball - Needle Design .....	70
Live Loaded - Grayloc® Hub Connection - Needle Design .....	72
<b>Complementary Products for Complete Installation Solutions .....</b>	<b>74</b>

# Introduction

Parker’s range of Process to Instrument valves has evolved and grown over the last two decades. The range has been designed to meet customer requirements for both double block and bleed and single block and bleed valves in all materials used by the industry today. It covers all the pressure requirements for ASME flange ended valves up to class 2500 and for API 6A up to 15K pressures. The bore sizes start at 10mm and are offered in increments up to 54mm (2”). Many of the valves were designed to meet specific customer needs.

One of Parker’s unique advantages is the offering of an integral A-LOK® two ferrule fitting or CPI™ single

ferrule fitting connections for remote mounting of an instrument or for sample and injection valves. The specification of the world renowned and universally acceptable Parker compression type connections will improve system performance, increase safety, reduce size and weight and simplify installation which ultimately reduces overall user costs.

Continuous product development may from time to time necessitate changes in the details contained in this catalogue. Parker reserves the right to make such changes at their discretion and without prior notice.

All dimensions shown in this catalogue are approximate and subject to change.

Every effort is made to provide sufficient, clear and accurate information to allow the correct selection of product from this catalogue, but ultimately it is the system designer’s or user’s responsibility to ensure selected product is suitable for the intended application. Should you require further information please do not hesitate to contact your local Parker support.

With thousands of distributor outlets and stores worldwide, and hundreds of Parker personnel and locations, Parker also offers the superior advantage of supply and support in your locale.



Upstream Oil & Gas



Downstream Oil & Gas



Industrial Gas

## Parker EHS Vision Statement:

Parker recognizes, and believes, in the importance of safeguarding natural resources and the global environment. We are committed to our employees, our communities, and our customers: their health, safety and understanding of the need for environmental stewardship.

We are committed to the concept of continuous improvement in environmental performance. Accordingly, we are committed to the following principles:

- We will seek to comply with environmental, health, and safety laws worldwide.
- We strive to minimize or eliminate the generation of waste.
- We will monitor compliance with environmental, health and safety regulations.



# General Technical Information

## Design

Parker’s Process to Instrument valves are designed to meet the pressure and temperature ratings of ASME B16.34 Class 2500. Conformity to the recommendations of MSS SP-99 is also assured.

- Parker’s Pro-Bloc® EP series valves conform to the EEMUA 182 specification for integral block and bleed valve manifolds for direct connection to pipework. This specification covers manifolds comprising two or more isolating valves and a vent valve, in an integral body, intended for the following applications:
- Having an inlet directly connected to the process pipework and an outlet connection not larger than DN 50 (NPS 2), whose principal use is as a replacement for individual block and bleed valves at tapping points in piping systems.
  - Arrangements having an inlet and outlet directly connected to the process pipework, whose principal use is for equipment or process isolation.

Code/Specification	Description
EEMUA 182	Specification for Integral Block and Bleed and Bleed Valve Manifolds for Direct Connection to Pipework
ASME B16.34/ ASME VIII Div. I	Valves - Flanged, Threaded and Welding End
ASME B16.5	Pipe Flanges and Flanged Fittings
NACE MR0175 / ISO 15156	Petroleum and Natural Gas Industries - Materials for use in H2S - Containing Environments in Oil and Gas Production
API 598	Valves Inspection and Testing
API 607 / ISO 10497	Fire Test of Soft-Seated Quarter Turn Valves Fire Type-Testing Requirements
MSS SP-25	Standard Marking Systems for Valves, Fittings, Flange and Unions
MSS SP-61	Pressure Testing of Valves
MSS SP-99	Instrument Valves
ISO 15848	Industrial valves— Measurement, test and qualification procedures for fugitive emissions
TA Luft	TA-Luft 2002, Absatz 5.2.6.4 und VDI 2440 (Ausgabe Nov. 2000), Absatz 3.3. 1.3

## Materials of Construction

All materials are purchased from long standing reputable sources, conforming not only to recognised national/ international standards, but also to additional requirements imposed by Parker to assure suitability/usability across the widest spectrum of user applications. A range of techniques and processes including PMI (Positive Material Identification) are used to validate all incoming material supplies, segregation, storage and maintenance of product quality.

### Body material options

Material Group	Material Designator	UNS No.	ASTM Material Grade
Carbon Steel	A105 / A350-LF2	UNS 1.0482	A105
Austenitic Stainless Steel	316/316L Dual Certified	UNS S31600	A479 Gr 316
		UNS S31603	A479 Gr 316L
Super Austenitic Stainless Steel	6Mo	UNS S31254	A479/A276
Austenitic-Ferritic Steel (Duplexes)	Duplex 22Cr	UNS S31803	A479/A276
	Duplex 25Cr	UNS S32750	A479/A276
		UNS S32760	A479/A276
Nickel Alloy	Alloy 825	UNS N08825	ASTM B425
Nickel Alloy	Alloy 625	UNS N06625	ASTM B446

All materials will meet (as applicable) the requirements of NACE MR0103/MR0175 and ISO 15156. They are further supplied as per NORSOK M650/M630 as required.

## Flange Connections

### Pressure-temperature ratings for flanges ASME/ANSI B16.5


Parker’s Process to Instrument valves carry the pressure-temperature ratings of their flange end interface according to ASME B16.5 dimensional specifications and pressure ratings.

Flange Material	°C	-29	38	50	100	150	200	250
	°F	-20	100	122	212	302	392	482
	Working Pressure - PSI (bar)							
Class 150								
Carbon Steel		284 (19.6)	284 (19.6)	278 (19.2)	257 (17.7)	229 (15.8)	200 (13.8)	175 (12.1)
316/316L St.Steel		276 (19.0)	276 (19.0)	267 (18.4)	235 (16.2)	215 (14.8)	199 (13.7)	175 (12.1)
Duplex		290 (20.0)	290 (20.0)	283 (19.5)	257 (17.7)	229 (15.8)	200 (13.8)	175 (12.1)
Class 300								
Carbon Steel		741 (51.1)	741 (51.1)	727 (50.1)	676 (46.6)	654 (45.1)	635 (43.8)	608 (41.9)
316/316L St.Steel		719 (49.6)	719 (49.6)	698 (48.1)	612 (42.2)	558 (38.5)	518 (35.7)	484 (33.4)
Duplex		750 (51.7)	750 (51.7)	750 (51.7)	735 (50.7)	666 (45.9)	619 (42.7)	587 (40.5)
Class 600								
Carbon Steel		1481 (102.1)	1481 (102.1)	1453 (100.2)	1352 (93.2)	1308 (90.2)	1270 (87.6)	1271 (83.9)
316/316L St.Steel		1440 (99.3)	1440 (99.3)	1395 (96.2)	1224 (84.4)	1117 (77.0)	1034 (71.3)	969 (66.8)
Duplex		1500 (103.4)	1500 (103.4)	1500 (103.4)	1469 (101.3)	1333 (91.9)	1237 (85.3)	1173 (80.9)
Class 900								
Carbon Steel		2222 (153.2)	2222 (153.2)	2181 (150.4)	2028 (139.8)	1961 (135.2)	1906 (131.4)	1824 (125.8)
316/316L St.Steel		2159 (148.9)	2159 (148.9)	2093 (144.3)	1836 (126.6)	1675 (115.5)	1552 (107.0)	1452 (100.1)
Duplex		2249 (155.1)	2249 (155.1)	2249 (155.1)	2204 (152.0)	1999 (137.8)	1856 (128.0)	1761 (121.4)
Class 1500								
Carbon Steel		3703 (255.3)	3703 (255.3)	3634 (250.6)	3379 (233.0)	3269 (225.4)	3176 (219.0)	3041 (209.7)
316/316L St.Steel		3600 (248.2)	3600 (248.2)	3489 (240.6)	3060 (211.0)	2792 (192.5)	2586 (178.3)	2421 (166.9)
Duplex		3750 (258.6)	3750 (258.6)	3750 (258.6)	3674 (253.3)	3330 (229.6)	3093 (213.3)	2934 (202.3)
Class 2500								
Carbon Steel		6171 (425.5)	6171 (425.5)	6058 (417.7)	5632 (388.3)	5447 (375.6)	5294 (365.0)	5069 (349.5)
316/316L St.Steel		6000 (413.7)	6000 (413.7)	5814 (400.9)	5099 (351.6)	4653 (320.8)	4310 (297.2)	4033 (278.1)
Duplex		6249 (430.9)	6249 (430.9)	6249 (430.9)	6123 (422.2)	5550 (382.7)	5154 (355.4)	4890 (337.2)

# General Technical Information

## Flange Connections

### Flange dimensions

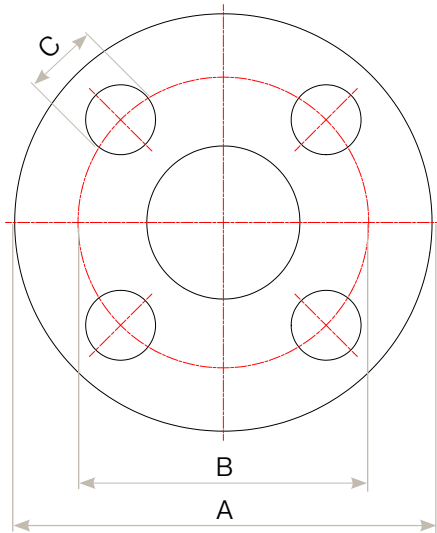

Nominal Pipe Size inch	Dimensions inch (mm)			Number of Mounting Holes
	A	B	C	
Class 150				
1/2	3 1/2 (88.9)	2 3/8 (60.5)	1/2	4
3/4	3 7/8 (98.6)	2 3/4 (69.8)	1/2	4
1	4 1/4 (108)	3 1/8 (79.2)	1/2	4
1 1/2	5 (127)	3 7/8 (98.6)	1/2	4
2	6 (152)	4 3/4 (121)	5/8	4
Class 300/Class 600				
1/2	3 3/5 (95.2)	2 5/8 (66.5)	1/2	4
3/4	4 5/8 (117)	3 1/4 (82.6)	5/8	4
1	4 7/8 (124)	3 1/2 (88.9)	5/8	4
1 1/2	6 1/8 (155)	4 1/2 (114)	3/4	4
2	6 1/2 (165)	5 (127)	5/8	8
Class 900/Class 1500				
1/2	4 3/4 (121)	3 1/4 (82.6)	3/4	4
3/4	5 1/8 (130)	3 1/2 (88.9)	3/4	4
1	5 7/8 (149)	4 (102)	7/8	4
1 1/2	7 (178)	4 7/8 (124)	1	4
2	8 1/2 (216)	6 1/2 (165)	7/8	8
Class 2500				
1/2	5 1/4 (134)	3 1/2 (88.9)	3/4	4
3/4	5 1/2 (140)	3 3/4 (95.2)	3/4	4
1	6 1/4 (159)	4 1/4 (108)	7/8	4
1 1/2	8 (203)	5 3/4 (156)	1 1/8	4
2	9 1/4 (235)	6 3/4 (171)	1	8

Note: Dimensions are for reference only and are subject to change.

## Meeting the ISO Standard

From 2007 EU’s IPPC directive 96/61/EC legislates for the minimisation of pollution from industrial sources (Many other regions and countries have similar legislation). An important part of this legislation is reducing Ultra-Low emissions, which will have significant consequences for all processes. According to the IPPS all plants and factories which fail to comply with the standards set by the directive may be closed from this point.

To put the scale of the challenge into perspective, a typical European refinery loses between 600 and 10,000 tonnes of emissions per annum. Around 70% of these losses are estimated to be caused by plant equipment such as pipe flanges, pumps, valves and vessels. Leakage from valves is often the biggest culprit, reportedly accounting for around 50% of the Ultra-Low emissions within the chemical and petrochemical industries.

Irrespective of the environmental impact, there is a tremendous financial burden on industry because it represents a huge loss of product, and cause of plant inefficiency. However, the true costs to industry are not always appreciated, as many of the costs associated with Ultra-Low emissions are hidden, such as labour and materials to repair leaks, wasted energy, environmental fines and clean up costs, lost sales due to a poor green image, claims for personal injury and more. In this way, reducing Ultra-Low emissions not only protects the environment, but can save companies time and money.

With the above in mind, the legislation introduces a concept of Best Available Technique (BAT), urging plants to find the best available solution for reducing Ultra-Low emissions throughout the process, from areas such as design, product selection, fitting and fitter training, to maintenance, site monitoring, and so on.

With regard to the design and site monitoring of Ultra-Low emissions ISO 15848 parts 1 and 2 have been developed respectively.

Part 1 covers the classification system and qualification procedure for type testing of valves. The standard specifies three tightness classes of leakage with respect to stem sealing diameter. These classes are class A, B and C. Class A having the smallest environmental leakage. Each class level is one hundred fold lower than the class above i.e. a class B product may have a leakage of 100 times that of a class A product. The standard also specifies the duty that the valve has been tested to.

Parker Hannifin is now able to offer our full range of

flanged products with a class A approval to ISO 15848-1. These products are identified as the Ultra-Low Emissions range and are certified as ISO FE AH-C01-SSA1-t (RT,180°C)-ANSI2500-ISO 15848-1. This states that the product has been classified as meeting the ISO 15848-1 standard with the following criteria;

- Class A tested with Helium
- Endurance class C01 – a mechanical valve which has been tested throughout 500 mechanical actuations with two thermal cycles
- Temperature class RT-180°C – Fully thermal cycled and tested from -29°C to +180°C Pressure class ANSI 2500 – 6000 psi in 316 st.st.

Part 2 of the standard covers production acceptance testing of valves. This production testing can only be carried out to product which has already been approved to part 1 of the standard. Production testing can be carried out to and sampling percentage specified by the purchaser with a minimum of one per lot. The production testing is a simpler helium sniffer test which is carried out at room temperature with no mechanical actuations.








ISO 15848 standard

ISO 15848 parts 1&2 (defining a classification system and qualification procedures, and production acceptance test of industrial valves, respectively) specify new Ultra-Low standards for emissions. This standard is becoming the requirement for oil and gas and petrochemical organisations worldwide. The standard was originally created for process valves and control valves but is now being applied to Instrumentation valves which include primary isolation valves, especially on environmentally sensitive projects. Meeting these low levels is a challenge, which Parker Instrumentation has solved with the new ball and needle valve designs used in these Double Block and Bleed valves and monoflanges. These designs meet the highest class ‘A’ level over the temperature range -29°C to +180°C celsius, alongside the standard instrumentation manifold pressure ranges. Production testing and certification is available upon request. Please specify sample quantity required for production testing with your order. O-ring material grade is a fluoroelastomer FKM tetrapolymer, specially formulated for explosive decompression (ED) resistance. The seals are qualified to the stringent Norsok M-710 standard that covers both ED resistance and sour gas (H<sub>2</sub>S) ageing tests.


Features

- Class ‘A’ leakage rates achieved
- Bolted ball valve bonnet assembly
- All threads sealed from the media
- All ball valves are bi-directional
- Firesafe design available

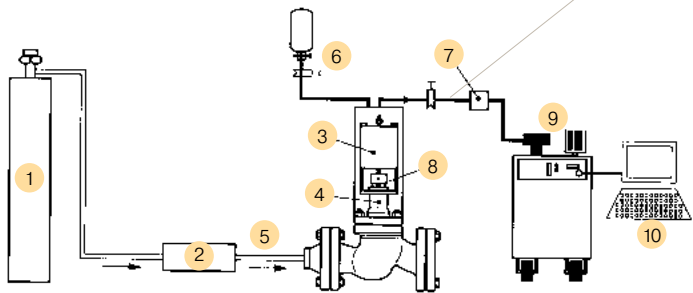

Prototype testing schematic as per ISO 15848-1

Reference	Description
1	Helium at 97% purity
2	Pressure control
3	Actuator
4	Vacuum
5	Helium
6	Standard calibrated leak
7	Vacuum safety
8	Tested stem sealing
9	Helium mass spectrometer
10	Data acquisition

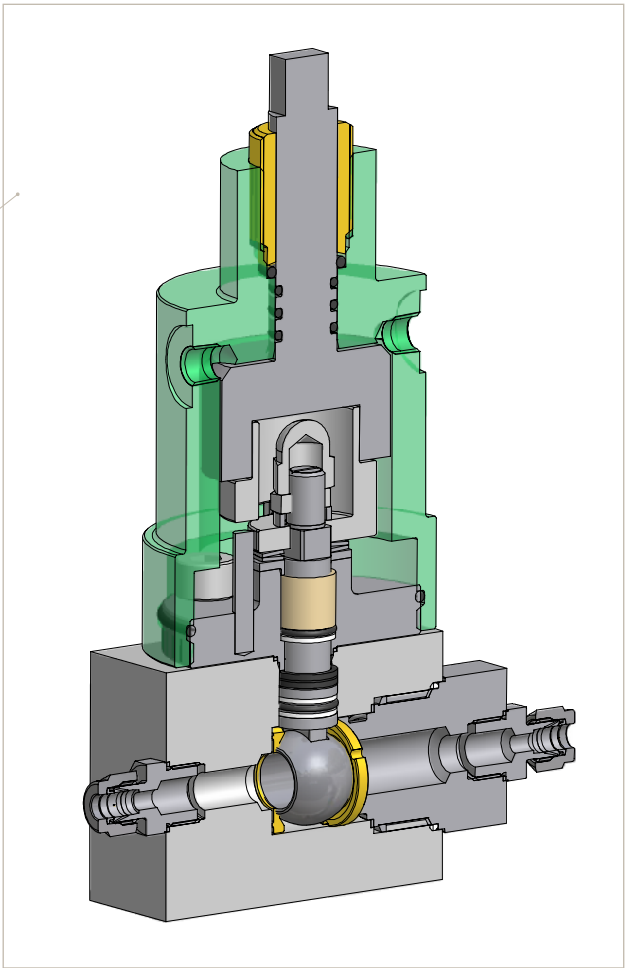

Ball valve ISO 15848-1  
Prototype testing assembly



# Monoflange

## MF Series

### Overview

Parker’s monoflange allows a safe removal of a pressure measuring device such as a transmitter or a gauge. “In situ” instrument calibration can also be achieved by using the monoflange vent as the test port. The compact single piece construction offers space and weight saving benefits over the traditional method of using two or three separate valves fabricated to create block and bleed or double block and bleed.




Monoflange with Outside Screw & Yoke (OS&Y) valve primary isolation



Monoflange with needle valve (H Series) primary isolation

These manifolds can be mounted directly onto a vertical or horizontal flange (dual outlet arrangement).

Parker are able to supply monoflange valves with integral ended compression fittings, removing the need for NPT threads and associated sealant or tape.

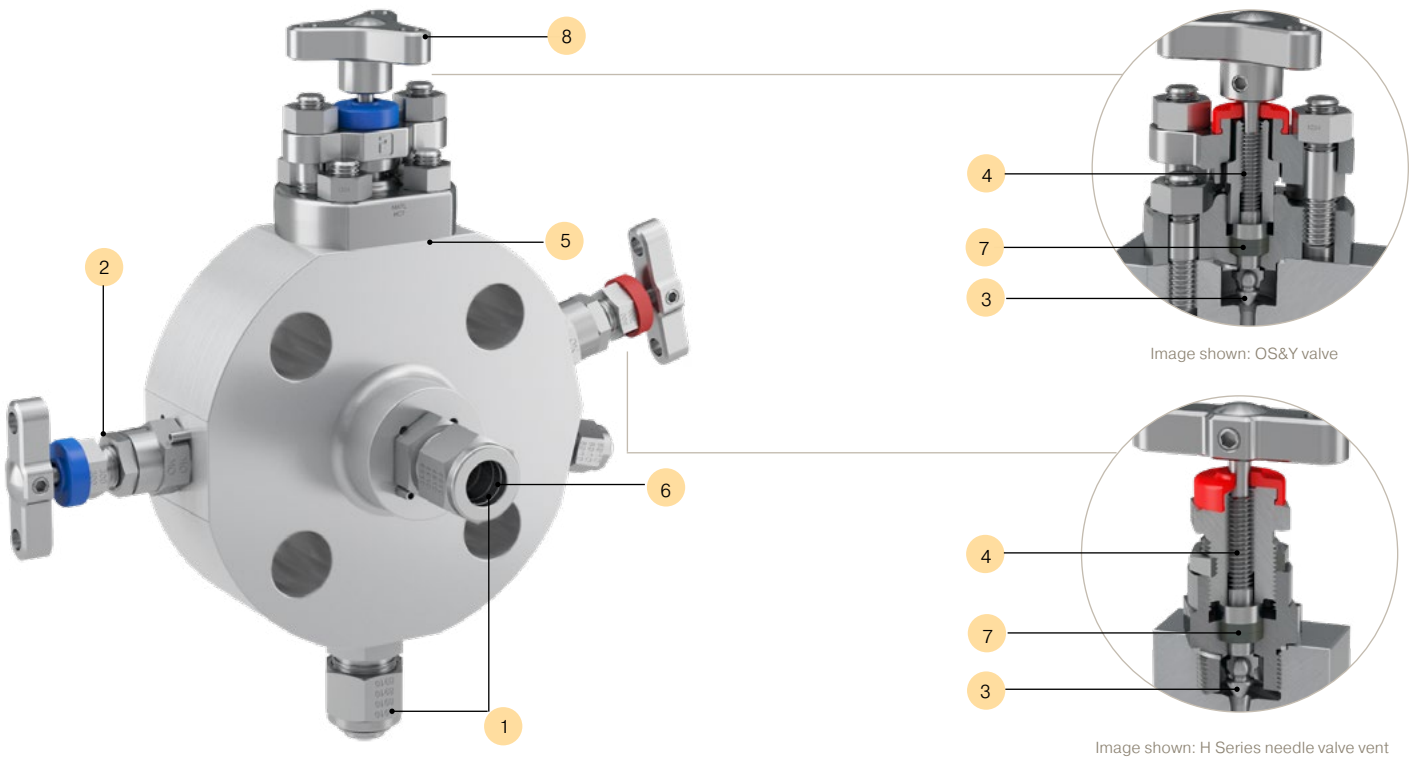

Monoflange with Outside Screw & Yoke (OS&Y) valve primary isolation

### Markets / Applications

- Oil & Gas Upstream
- Oil & Gas Downstream
- Petrochemical
- Chemical
- Industrial Gas

### Design Standards

- Flange geometry and thickness: ANSI B16.5
- Pressure/temperature boundary designs: ASME VIII Div. 1; verified by testing
- Fire safe: API 6FA and API 607
- NACE

### Technical Specifications

Seat material	Metal to Metal
Packing material	PTFE (standard), Graphite (optional)
Stem Tip	17-4PH St. St (standard) PEEK (optional)
Body materials	Stainless Steel ASTM A182-F316/F316L Alloy M400 Duplex A182-F51 Super Duplex ASTM A182-F53/F55 Alloy C276 Low Temp Carbon Steel ASTM A350 LF2/ ASTM A105 6Mo Alloy 625 Alloy 825
Max. Working Temperature	PTFE packing: 260° C (500° F) Graphite packing: 538° C (1000° F)
Min. Working Temperature	-54° C (-65° F)
Max. Working Pressure	6,249 PSI (431 bar)

### Features, Benefits and Values

Reference	Feature	Benefit	Value
	Compact design combining multiple valves into one body	Space and weight saving Reduction in potential leak paths	<b>Safety</b> <b>Reliability</b> <b>Lower overall cost</b>
1	Dual outlet option	Enables both horizontal and vertical mount of the instrument gauge or transmitter	<b>Ease of Operation</b>
2	Incorporation of Parker H Series needle valve technology	Proven performance of a technology utilised across a wide range of products	<b>Performance &amp; Reliability</b>
3	Self-centering, non-rotating stem tip	Bubble-tight shut off	<b>Performance &amp; Reliability</b>
4	All stem threads are internal on the Outside Screw and Yoke (OS&Y) valve and protected from the environment	Prevents ingress of external moisture or contamination to the stem threads	<b>Performance &amp; Reliability</b> <b>Safety</b>
5	No gap between body and bonnet on the OS&Y valve	Prevents ingress of external moisture or contamination to the bonnet studs	<b>Performance &amp; Reliability</b> <b>Safety</b>
6	Integral compression ends available (A-LOK®, CPI™)	Reduces leak paths Removes the need for PTFE tape and sealant Reduces component costs	<b>Performance &amp; Reliability</b> <b>Lower overall cost</b>
7	Gland packing below stem threads preventing thread lubricant wash-out	No system contamination	<b>Safety</b> <b>Performance &amp; Reliability</b>
8	Tri-lobe handle on the OS&Y valve	Prevents over-torquing of the valve	<b>Safety</b>
	Metal identification label	Identifies product part number, flow paths, material and temperature	<b>Safety</b>

# Monoflange


## MF Series

### Technical Information

#### Bill of Materials


Description	St.Stl	CRA-NiCu	Duplex	Super Duplex	CRA-NiMoCr	Titanium	6MO	Alloy 825	Alloy 625
Body	316 St.Stl ASTM A479	Alloy M400	Duplex UNS 31803	Super Duplex UNS S32750/32760	Alloy C276	Titanium GR-2	6MO	Alloy 825	Alloy 625
Tip	17-4PH St.Stl	Alloy K500	Duplex UNS S.32750/32760	Alloy 625	Alloy B3	Titanium GR-5	DUPLEX UNS S.32750/32760	Alloy 625	Alloy 718
Joint Seal	316 St.Stl ASTM A479	Alloy M400	6MO	Alloy 625	Alloy C276	Alloy 825	6MO	Alloy 825	Alloy 625
Packing	PTFE / Graphite								
Thrust Bush	316 St.Stl								
Stem	316 St.Stl ASTM A479	Alloy M400	Duplex UNS 31803	Super Duplex UNS S32750/32760	Alloy C276	Titanium GR-2	6MO	Alloy 825	Alloy 625
Gland Adjuster	316 St.Stl. ASTM A479								
Handle	316 St.Stl								
Grub Screw	A4-80 St.Stl								
Dust Cap	LDPE - Coloured								
Lock Nut	316 St.Stl								
Bonnet	316 St.Stl ASTM A479	Alloy M400	Duplex UNS 31803	Super Duplex UNS S32750/32760	Alloy C276	Titanium GR-2	6MO	Alloy 825	Alloy 625
Stud (OS&Y)	316 St.Stl								
Stud Nut (OS&Y)	316 St.Stl								
Yoke/bridge (OS&Y)	316L St.Stl								

#### Pressure-Temperature Ratings for Packing

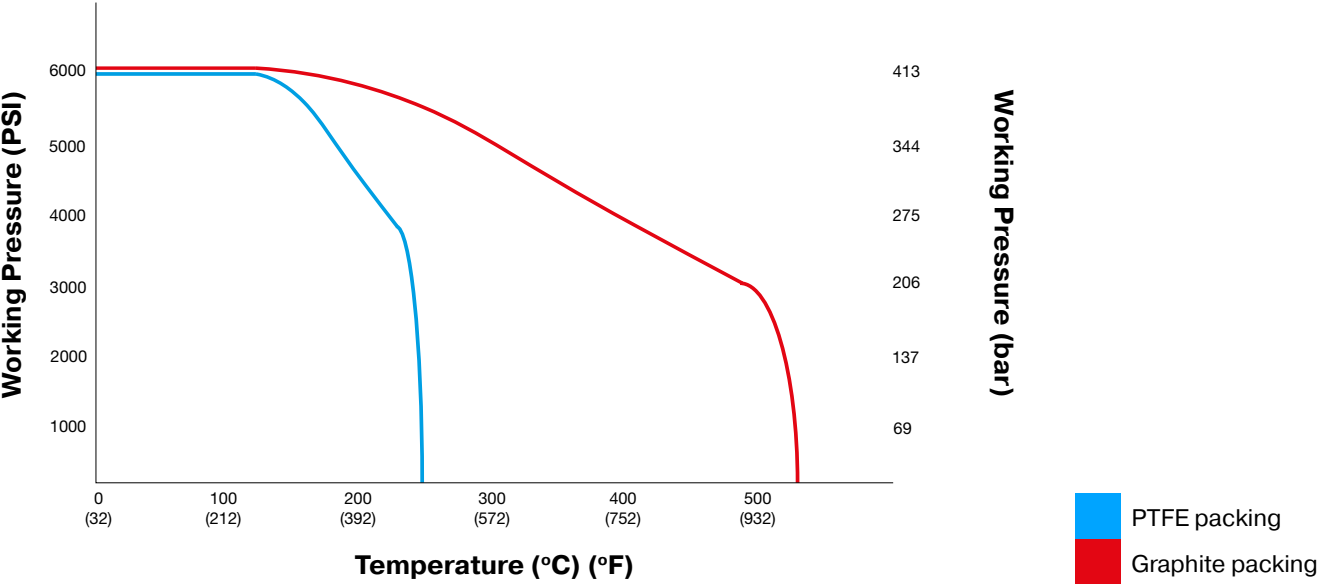


### Dual Outlet Option for Vertical or Horizontal Mount

For ease of installation and reading of the pressure gauge, Parker monoflanges are available in dual outlet arrangements allowing for either vertical or horizontal mounting with the gauge fitted on either the outer diameter of the body or the front face of the monoflange.

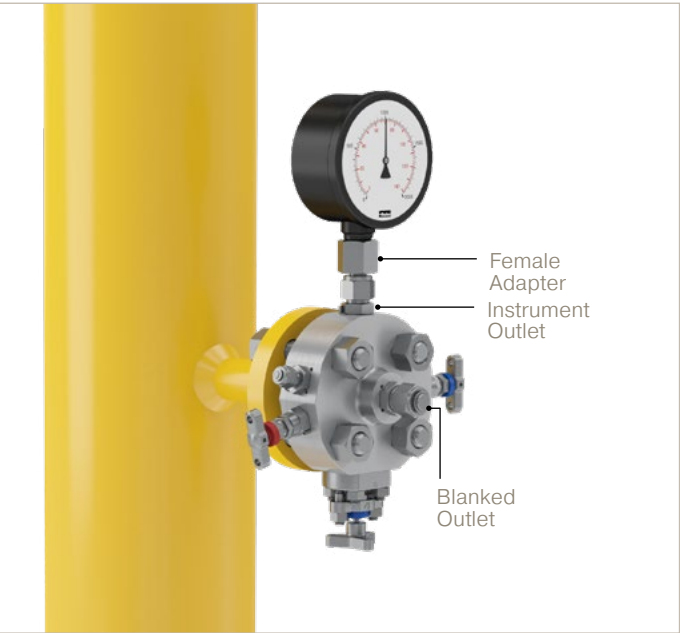

Monoflange with a dual outlet option mounted directly to a vertical pipe.

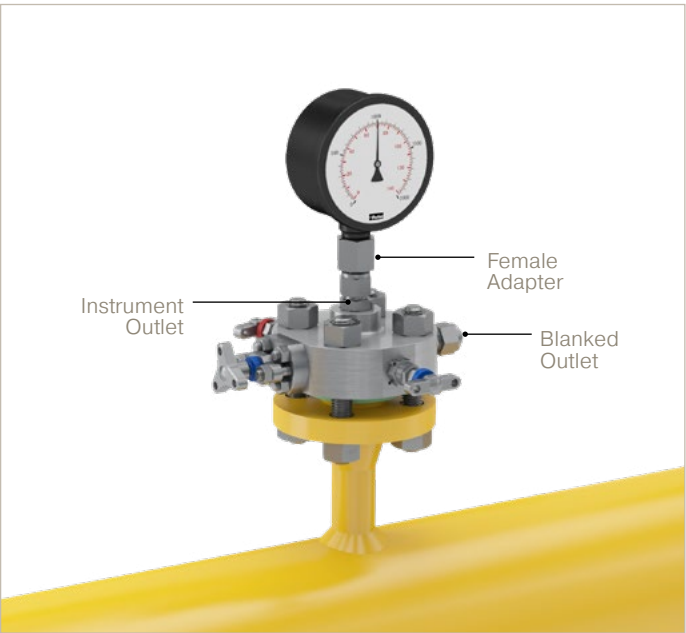


Monoflange with a dual outlet option mounted directly to a horizontal pipe.

### Gauge Mounting

Parker's female adapters A-LOK® and CPI™ series enable the gauge to be assembled into the monoflange valve outlet, whilst providing accurate orientation of the gauge. The adapters are available in NPT, BSPT and BSPP connections. Simply screw the gauge into the selected adapter, then insert the machined tube end into the fitting, orientate the gauge and tighten the fitting as per assembly instructions. This method removes the need for a swivel gauge adapter.



Parker's tube end female adapter A-LOK® series

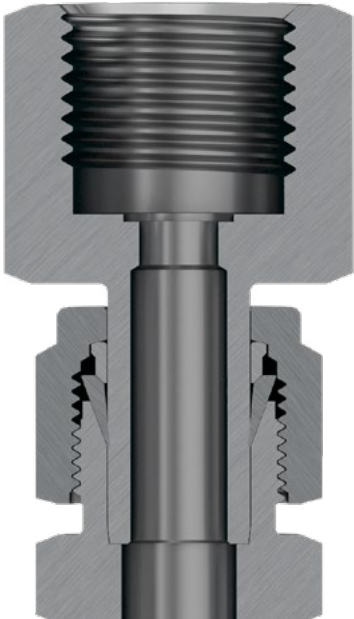

Parker's tube end female adapter installed into an A-LOK® outlet connection.



# Monoflange


## MF Series

### PTFree connect™



The PTFree connect™ method enables users to assemble tube lines to any of the monoflange ports without the need for PTFE tape or liquid sealant. These will be factory fitted, pin locked and pressure tested.

Some size restrictions may be necessary due to the close proximity of some connections and the across flat hexagon dimensions. The PTFree connect™ male connector outlets are 1/2" or 12mm O.D. and vents are 1/4" or 6mm O.D.



PTFree connect™ male connector  
(Code PFC)

Tube size	Dimension (A)	
6mm	26.90mm	0.95"
1/4"	24.10mm	0.84"
10mm/3/8"	27.70mm	1.09"
12mm/1/2"	30.30mm	1.20"

### Dual Instrument Mounting

Parker's monoflanges are available with two separate instrument outlets. Both outlets have their own double block and bleed flow path with a common vent.

By incorporating two instruments into one flanged body only one flanged outlet is required from the process line, instead of using two monoflanges (one for each instrument).

This configuration enables two pressure measuring devices to be mounted onto the valve, giving the user assurance of continuous operation in the event of one of the devices failing. It also allows double verification of the measurement reading. Each separate instrument can be safely removed for calibration or replacement by isolating and venting the valves relating to that instrument, leaving the remaining instrument in operation.

Please consult your local Parker support.



Monoflange with dual instrument (MFY170). Contact Parker.

### Close-Coupled Techniques for Instrument Mounting


Innovations in the design of block and bleed valves for mounting pressure transmitters can deliver significant advantages to both instrument and piping engineers to simplify installation and reduce potential leak paths.

Parker's range of instrument manifold mounting solutions employs close-coupling techniques which reduce or eliminate impulse or gauge lines to improve overall instrument performance and reliability.

The close-coupled technique enables users to connect measuring instrument directly onto the process line via the monoflange valve. The bolted interface between the transmitter and the monoflange eliminates threads, potential thread galling and any need for thread sealants.


There are various possibilities for assembly options utilising the close coupled concept. The following examples demonstrate Pressure and Level measurement assemblies. instrument goes

#### Static pressure measurement

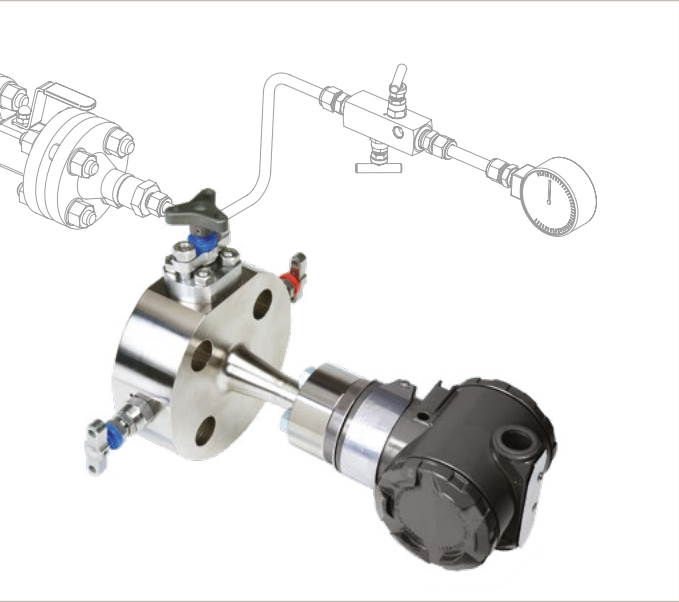

This assembly utilises a Coplanar™ bolted interface between the flanged outlet and the transmitter. Please consult your local Parker support.

#### Level measurement

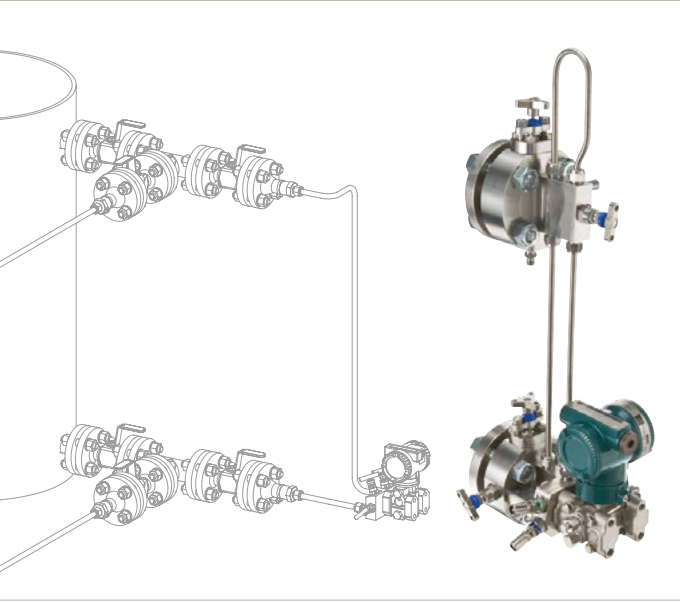

This assembly combines wet and dry leg installations. The close coupled assembly mounted at the bottom of the tank consists of an instrument manifold and a piping isolation monoflange in a single-piece machined unit and the differential pressure transmitter directly mounted onto it. The assembly is connected to the high pressure leg (or wet leg).

The low pressure (or dry leg) is connected to the monoflange and manifold assembly at the top of the tank.

Please consult your local Parker support.

#### Benefits of close coupled assemblies:

- Compact design with fewer components and fewer leak paths
- Elimination of impulse lines and threaded connections
- Elimination of brackets
- Space savings
- Simplified installation



Learn how to safely remove plugged Monoflange using an integrated Parker Monoball solution. Click here to watch the video.

Scan the QR code to watch the video.

Monoflange

MF Series

Ordering Information

MF

Series

MonoflangeMF

Y

1st Isolate

Needle ValveH

OS&Y Y

100

E

Material

316 Stainless Steel/316L ASTM A182-F316/ F316L	B
Alloy M400	D
Duplex ASTM A182-F51	E
Super Duplex ASTM A182-F53/F55	F
Alloy C276	G
Low Temp Carbon Steel ASTM A350 LF2/ ASTM A105	H
6MO	K
Alloy 825	L
Alloy 625	M

1st Isolate: Needle (H)

		Block-Bleed-Block	
		1st Isolate: Needle	100
		2nd Isolate: Needle	
		Vent: Needle	
		Block-Bleed	
		1st Isolate: Needle	120
		Vent: Needle	
		Block-Bleed	
		1st Isolate: Needle	130
		Vent: Needle	

1st Isolate: OS&Y (Y)

		Block-Bleed-Block	
		1st Isolate: OS&Y	100
		2nd Isolate: Needle	
		Vent: Needle	
		Block-Block-Bleed	
		1st Isolate: OS&Y	110
		2nd Isolate: Needle	
		Vent: Needle	
		Block-Bleed	
		1st Isolate: OS&Y	120
		Vent: Needle	
		Block-Bleed	
		1st Isolate: OS&Y	130
		Vent: Needle	
		Single Block	
		1st Isolate: OS&Y	150
		Dual outlet Block-Bleed-Block	
		1st Isolate: OS&Y	105
		2nd Isolate: Needle	
		Vent: Needle	
		Dual outlet Block-Block-Bleed	
		1st Isolate: OS&Y	115
		2nd Isolate: Needle	
		Vent: Needle	

Flange x Flange configuration:

For Flange x Flange variants replace 1 (the first digit of the arrangement designator) with 2, i.e. MFH200, MFH220, MFY250



Notes:

- All non wetted parts will be supplied in standard stainless steel for corrosion resistant alloys. For carbon steel construction trim materials will be supplied in stainless steel
- Certification requirements and customer specifications MUST be provided at enquiry and order stage
- For DIN flange requirements full details must be specified separately

8F150

Seat Orifice Size

5 mm	*
6 mm *	6S

\* Standard seat orifice size - No part number designator required.  
\* 6 mm seat orifice size not available in all configurations. Contact Parker.

M12A

Outlet Connection

1/2" *	8	A-LOK®	A
6 mm	M6	CPI™	Z
10 mm	M10		
12 mm	M12		

Optional Outlet Connection

PTFree connect™ male union	PFC	A-LOK®	A	12 mm	M12
		CPI™	Z	1/2"	I8

\* Standard outlet connection is 1/2" Female NPT - No part number designator required.

6S

Valve Packing

PTFE	*
Graphite *	3

\* Fitted as standard - No part number designator required  
\* Not required when Fire Safe design option (F) selected

A1

Stem Tip

17-4PH St. St	*
PEEK	PN

\* Fitted as standard - No part number designator required

Y2

Additional OS&Y

Secondary valve	Y2
Vent	Y3
All valves	Y4

Certification requirements and customer specifications MUST be provided at enquiry and order stage.

F

Valve Handle Options

Anti-tamper (vent)	A*
Padlock handle locking	L*

\* Insert valve number:  
1 - Primary  
2 - Secondary  
12 - Primary/Secondary  
4 - All  
Padlocks not supplied.

F

Compliance

Fire Safe* (Graphite packing)	F
NACE	N
Fire Safe* & NACE	FN

\* Primary valve only - OS&Y needle valve

8F150

Flange Details

Flange Size	Flange Style	Flange Class			
1/2" *	8	Raised Face Spiral	F	150 *	150
3/4" *	12	Ring Type Joint *	T	300	300
1"	16			600	600
1 1/2"	24			900	900
2"	32			1500	1500
				2500	2500

\* Ring type joints (T) CANNOT be supplied for 1/2" and 3/4" class 150 flanges.

8F150

Vent

1/4" Female NPT	*
1/2" Female NPT	V8

Optional Vent

PTFree connect™ male union	VPFC	A-LOK®	A	6 mm	M6
		CPI™	Z	1/4"	I4

\* Standard vent - No part number designator required.  
Plug supplied loose.

Head Assembly Options



Anti-tamper spindle

This design valve head is to prevent accidental opening of the vent.  
All valves with this anti-tamper spindle are supplied with a key.



T bar handle locking

This design valve head is to prevent unauthorised operation of the valve. The hole size is 6mm (0.24").  
Padlocks are not provided.



Key

The Key is necessary to open or close the anti-tamper spindle (vent valve). The Key is also available to purchase as a separate item. Please note, image of the key is not to scale compared with the anti-tamper spindle.




# Low Emissions Monoflange

## FEMF Series

Parker offers Monoflanges in accordance to the ISO15848-1 to both class A and B. The valves prototype testing (part 1) is third party witnessed and verified. All valves are production tested to part 2 of the standard.

### Low Emissions Head Designs

#### Low Emissions Needle Valve H Series

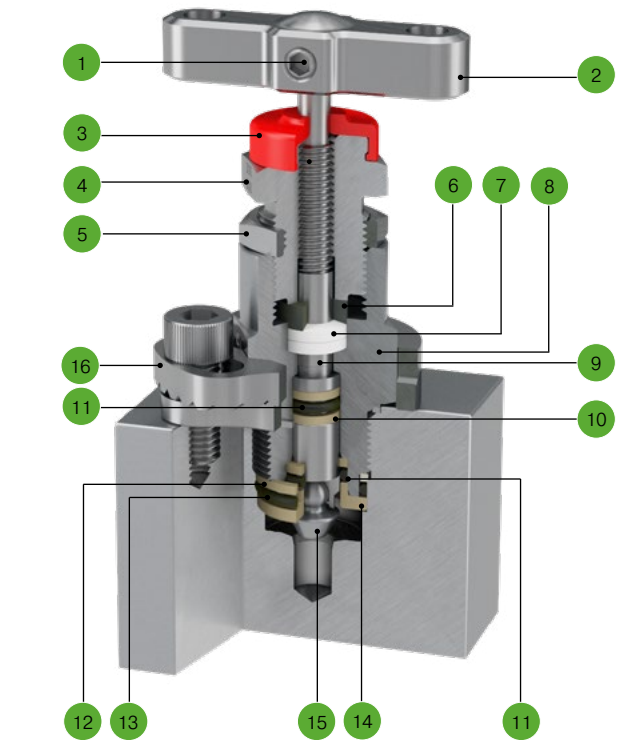

#### Tru-Loc® safety bonnet lock




#### Design Standards:

- ISO15848-1 class A and B.
- Flange geometry and thickness: ANSI B16.5
- Pressure/temperature boundary designs: ASME VIII Div. 1; verified by testing
- Fire safe: API 6FA and API 607
- NACE

Reference	Description
1	Positive handle retention
2	“T” bar
3	Dust cap
4	Gland packing adjuster
5	Gland adjuster lock nut
6	Thrust bush
7	Gland packing (adjustable)
8	Valve bonnet
9	Anti-blow-out spindle
10	Anti-extrusion ring
11	Elastomeric o-ring (stem seal)
12	Anti-extrusion ring
13	Elastomeric o-ring (body seal)
14	Bonnet end cap
15	Spindle tip
16	Tru-Loc® safety bonnet lock


The unique Parker Tru-Loc® security locking system is applied to the body-bonnet interface. It can also be applied to many other screwed component interfaces. Extensive tests have proven that threaded connection interfaces secured with Tru-Loc® guarantee 100% security in preventing movement between connected components. This lock also prevents accidental loosening or removal of the bonnet assembly.

### Low Emissions Outside Screw and Yoke (OS&Y)

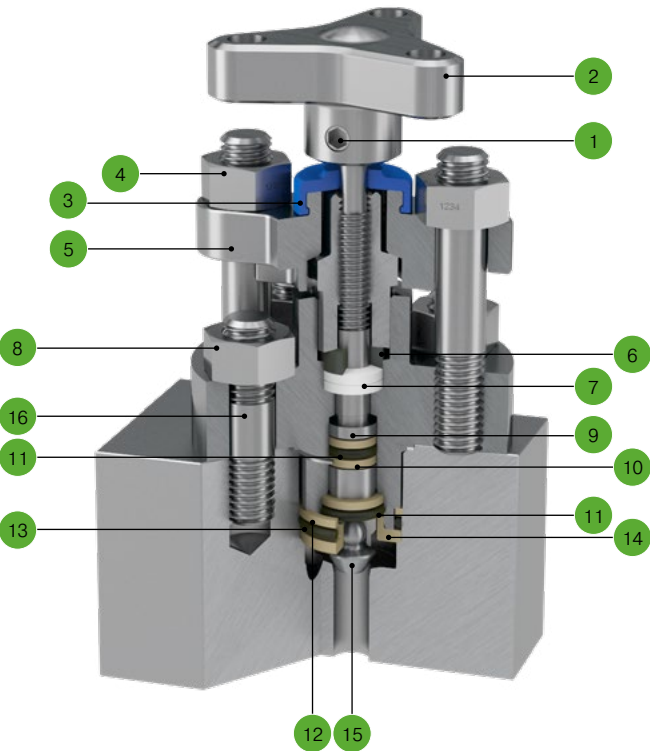

Reference	Description
1	Positive handle retention
2	Tri-lobe handle
3	Dust cap
4	Bridge nuts
5	Bridge (yoke)
6	Thrust bush
7	Gland packing (adjustable)
8	Stud nuts
9	Anti-blow-out spindle
10	Anti-extrusion ring
11	Elastomeric o-ring (stem seal)
12	Anti-extrusion ring
13	Elastomeric o-ring (body seal)
14	Bonnet end cap
15	Spindle tip
16	Body bonnet studding

#### Pressure vs temperature ratings (Stainless Steel body material)

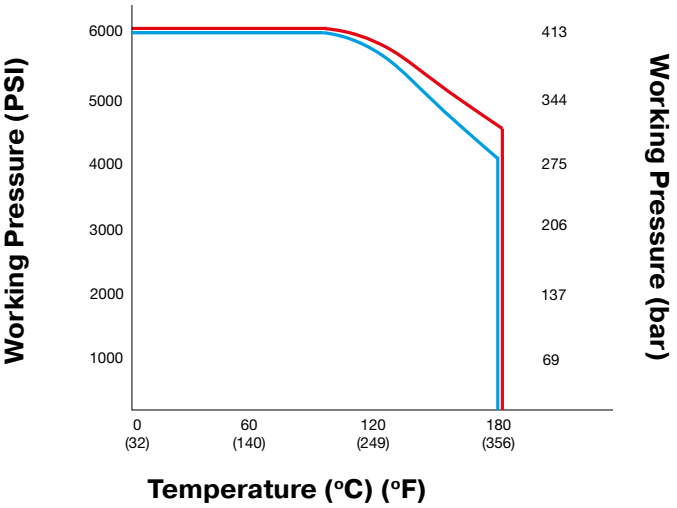

PTFE packing      Graphite packing

#### Notes:

- Production testing and certification available on request
- ISO15848-1 prototype tested using global helium vacuum method
- Also meets the requirements per TA-Luft according to VDI 2440 as tested by TUV SUD Industrie Service GMBH performing better than a leakage rate of VDI 2440 = 10<sup>-4</sup> mbar .l /s . m

#### Technical Specifications

<b>Seat material</b>	Metal to Metal
<b>Packing material</b>	PTFE (standard), Graphite (optional)
<b>Stem Tip</b>	17-4PH St. St (standard) PEEK (optional)
<b>Body materials</b>	Stainless Steel ASTM A182-F316/F316L Alloy M400 Duplex A182-F51 Super Duplex ASTM A182-F53/F55 Alloy C276 Low Temp Carbon Steel ASTM A350 LF2/ ASTM A105 6Mo Alloy 625 Alloy 825
<b>Max. Working Temperature</b>	180° C (356° F)
<b>Min. Working Temperature</b>	-29° C (-20° F)
<b>Max. Working Pressure</b>	6,249 PSI (431 bar)
<b>Tightness class A</b>	≥1 x 10 <sup>-6</sup> mg.s <sup>-1</sup> .m <sup>-1</sup>
<b>Performance class</b>	ISO FE AH-C01-SSA1-t (RT,180°C)-AN-SI2500-ISO 15848-1
<b>O-ring material</b>	Fluoroelastomer FKM Tetrapolymer *

\* Specially formulated for explosive decompression (ED) resistance. These seals are qualified to the stringent NORSOK M-170 standard covering both ED resistance and sour gas (H2S) ageing tests.

# Low Emissions Monoflange

## FEMF Series

### Ordering Information

FEBMF

Series	
Ultra-Low Emissions Monoflange Class A	FEMF
Ultra-Low Emissions Monoflange Class B	FEBMF

H

1st Isolate	
Needle Valve	H
OS&Y	Y

100

Arrangement	
<div>1st Isolate: Needle</div> <div></div> <div>Block-Bleed-Block</div> <div>100</div>	<div>1st Isolate: Needle</div> <div></div> <div>1st Isolate: Needle 2nd Isolate: Needle Vent: Needle</div> <div>100</div>
<div>1st Isolate: Needle</div> <div></div> <div>Block-Bleed</div> <div>120</div>	<div>1st Isolate: Needle</div> <div></div> <div>1st Isolate: Needle Vent: Needle</div> <div>120</div>
<div>1st Isolate: Needle</div> <div></div> <div>Block-Bleed</div> <div>130</div>	<div>1st Isolate: Needle</div> <div></div> <div>1st Isolate: Needle Vent: Needle</div> <div>130</div>

E

Material	
316 Stainless Steel/316L ASTM A182-F316/ F316L	B
Alloy M400	D
Duplex ASTM A182-F51	E
Super Duplex ASTM A182-F53/F55	F
Alloy C276	G
Low Temp Carbon Steel ASTM A350 LF2/ ASTM A105	H
6MO	K
Alloy 825	L
Alloy 625	M

Flange x Flange configuration:

For Flange x Flange variants replace **1** (the first digit of the arrangement designator) with **2**, i.e. **FEMFH200**, **FEMFH220**, **MFY250**

1st Isolate: OS&Y (Y)

<div>1st Isolate: OS&amp;Y</div> <div></div> <div>Block-Bleed-Block</div> <div>100</div>	<div>1st Isolate: OS&amp;Y</div> <div></div> <div>1st Isolate: OS&amp;Y 2nd Isolate: Needle Vent: Needle</div> <div>100</div>
<div>1st Isolate: OS&amp;Y</div> <div></div> <div>Block-Block-Bleed</div> <div>110</div>	<div>1st Isolate: OS&amp;Y</div> <div></div> <div>1st Isolate: OS&amp;Y 2nd Isolate: Needle Vent: Needle</div> <div>110</div>
<div>1st Isolate: OS&amp;Y</div> <div></div> <div>Block-Bleed</div> <div>120</div>	<div>1st Isolate: OS&amp;Y</div> <div></div> <div>1st Isolate: OS&amp;Y Vent: Needle</div> <div>120</div>
<div>1st Isolate: OS&amp;Y</div> <div></div> <div>Block-Bleed</div> <div>130</div>	<div>1st Isolate: OS&amp;Y</div> <div></div> <div>1st Isolate: OS&amp;Y Vent: Needle</div> <div>130</div>
<div>1st Isolate: OS&amp;Y</div> <div></div> <div>Dual outlet</div> <div></div>	<div>1st Isolate: OS&amp;Y</div> <div></div> <div>Single Block</div> <div>150</div>
<div>1st Isolate: OS&amp;Y</div> <div></div> <div>Single Block</div> <div>150</div>	<div>1st Isolate: OS&amp;Y</div> <div></div> <div>1st Isolate: OS&amp;Y</div> <div>150</div>

8F150

Seat Orifice Size	
5 mm	*
6 mm *	6S

\* Standard seat orifice size - No part number designator required.  
\* 6 mm seat orifice size not available in all configurations. Contact Parker.

6S

Outlet Connection	
1/2" *	8
6 mm	M6
10 mm	M10
12 mm	M12

\* Standard outlet connection is 1/2" Female NPT - No part number designator required.

8

Optional Outlet Connection	
PTFree connect™ male union	PFC
A-LOK®	A
CPI™	Z
12 mm	M12
1/2"	I8

Valve Packing

PTFE	*
Graphite *	3

\* Fitted as standard - No part number designator required  
\* Not required when Fire Safe design option (F) selected

Stem Tip

17-4PH St. St	*
PEEK	PN

\* Fitted as standard - No part number designator required

Additional OS&Y

Secondary valve	Y2
Vent	Y3
All valves	Y4

Certification requirements and customer specifications MUST be provided at enquiry and order stage.

Valve Handle Options

Anti-tamper (vent)	A*
Padlock handle locking	L*

\* Insert valve number:  
1 - Primary  
2 - Secondary  
12 - Primary/Secondary  
4 - All  
Padlocks not supplied.

Compliance

Fire Safe* (Graphite packing)	F
NACE	N
Fire Safe* & NACE	FN

\* Primary valve only - OS&Y needle valve

Vent

1/4" Female NPT	*
1/2" Female NPT	V8

\* Standard vent - No part number designator required.  
Plug supplied loose.

Optional Vent

PTFree connect™ male union	VPFC
A-LOK®	A
CPI™	Z
6 mm	M6
1/4"	I4

- Notes:
- All non wetted parts will be supplied in standard stainless steel for corrosion resistant alloys. For carbon steel construction trim materials will be supplied in stainless steel
  - For customer specific options not covered here, engineering will allocate a part number at quotation stage
  - Certification requirements and customer specifications MUST be provided at enquiry and order stage
  - Cross hole drillings are of 1 mm smaller diameter than the stated seat orifice sizes
  - For DIN flange requirements full details must be specified separately.



# Pro-Bloc® - Modular Single Piece DBB Valve

EP Series - EEMUA 182 Design Conformance

## Overview

Parker’s Pro-Bloc® EP series valve, conforming to the EEMUA 182 standard is a process to instrument valve which has a double block and bleed function and consists of two separate isolating balls and one vent in a single unit. The valve is also available in a block and bleed arrangement.

The single piece construction offers space and weight saving benefits over the traditional method of using three separate valves fabricated to create double block and bleed.

Parker EP series Process to Instrument valves locate directly onto the process pipeline and facilitate a double block and bleed function for the safe removal of pressure measuring instruments (transmitter or gauge).

This is done by isolating the primary block valve, opening the vent to remove the pressure within the instrument, then closing the vent and isolate the secondary block valve. The transmitter (or gauge) can now be safely removed for replacement or calibration in a workshop. The calibrated or replacement transmitter is then re-installed and the block valves returned to the open position to resume the instrument function of pressure measurement.

The EP series is designed to the EEMUA 182 design code giving the operator and owner assurance of a valve designed to sound engineering practices. The key advantages of EEMUA 182 are shown on the Features, Benefits and Values table.

Parker offer these valves in many configurations in a wide variety of materials commonly used in industries today. They are manufactured in our UK ISO9001, ISO14001 and ISO45001 compliant facility.

Parker are able to supply all valves with integral ended compression fittings for remote applications where the measuring instrument is not directly connected to the valve.

The integral compression ends (two ferrule A-LOK® or single ferrule CPI™) remove the need for NPT, thus removing potential galling, thread tape or sealant, additional leak paths and at the same time reduce the costs associated with buying and installing a separate fitting.



Pro-Bloc® EP Series with EEMUA 182 design conformance

## Markets / Applications:

- Oil & Gas Upstream
- Oil & Gas Downstream
- Petrochemical
- Chemical
- Industrial Gas

## Technical Information

### Technical Specifications

Bore sizes	10 mm, 15 mm, 20 mm, 25 mm
Seat materials	PTFE, PEEK
Body materials	Stainless Steel ASTM A182-F316/F316L Duplex A182-F51 Super Duplex ASTM A182-F53/F55 Low Temp Carbon Steel ASTM A350 LF2/ ASTM A105 6Mo Alloy 625 Alloy 825
Max. Working Temperature	232° C
Min. Working Temperature	-54° C
Max. Working Pressure	6,249 PSI (431 bar)

### Design Standards

- EEMUA 182
- Body wall thickness: ASME B16.34/ASME VIII Div. I
- Fire safe: API 6FA and API 607
- NACE



Learn how to safely remove a pressure instrument for calibration or calibrate “in-situ” using Parker’s Pro-Bloc® valve. Click here to watch the video.


[Scan the QR code to watch the video.](#)

### Bill of Materials

Description	Stainless Steel	Carbon Steel	Duplex
Body	316/316L St.Stl ASTM A182-F316/F316L	ASTM A105 /A350-LF2	Duplex St.Stl ASTM A182-F51
End Connections and Flange Inserts	316/316L St.Stl ASTM A479 UNS S31600/S31603	ASTM A105 /A350-LF2	Duplex St.Stl ASTM A479 UNS S31803
Ball Valve Ball	316/316L St.Stl ASTM A479 UNS S31600/S31603		Duplex St.Stl ASTM A479 UNS S31803
Ball Valve Stems	316/316L St.Stl ASTM A479 UNS S31600/S31603		Duplex St.Stl ASTM A479 UNS S31803
Ball Valve Seats	PTFE / PEEK		
Ball Valve Packing	Graphite		
Body Seals	316/316L St.Stl ASTM A479 UNS S31600/S31603 Graphite		6MO ASTM A479 UNS S31254
Needle Valve Stem	316/316L St.Stl ASTM A479 UNS S31600/S31603		Duplex St.Stl ASTM A479 UNS S31803
Needle Valve Tip	17/4 PH St.Stl ASTM A564/A564M UNS S17400		Super Duplex St.Stl ASTM A479 UNS S32750/S32760
Needle Valve Screwed Bonnet and Gland Adjuster	316/316L St.Stl ASTM A479 UNS S31600/S31603		Duplex St.Stl ASTM A479 UNS S31803
All other components	316 St.Stl		

# Pro-Bloc® - Modular Single Piece DBB Valve

EP Series - EEMUA 182 Design Conformance

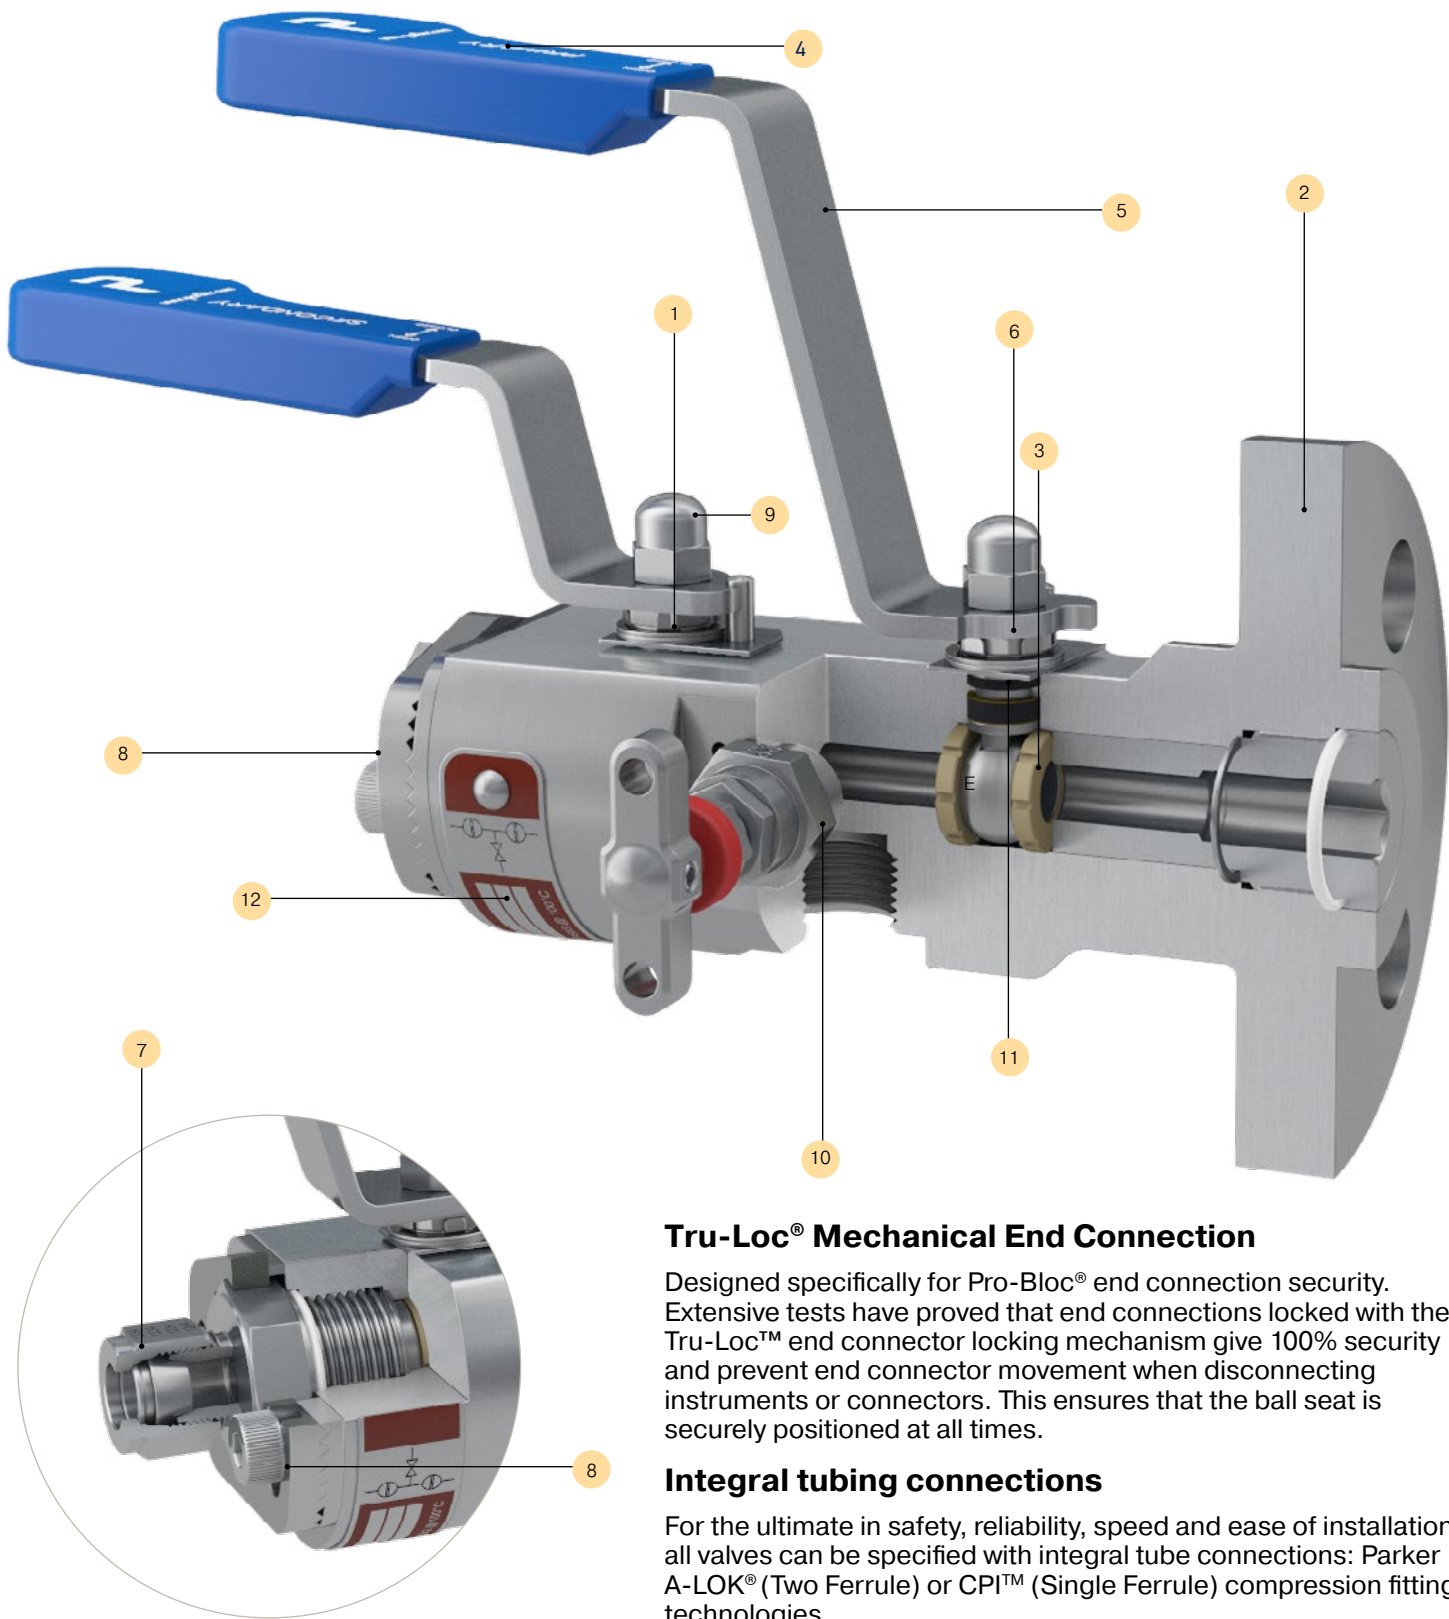


**Tru-Loc® Mechanical End Connection**  
Designed specifically for Pro-Bloc® end connection security. Extensive tests have proved that end connections locked with the Tru-Loc™ end connector locking mechanism give 100% security and prevent end connector movement when disconnecting instruments or connectors. This ensures that the ball seat is securely positioned at all times.

**Integral tubing connections**  
For the ultimate in safety, reliability, speed and ease of installation all valves can be specified with integral tube connections: Parker A-LOK® (Two Ferrule) or CPI™ (Single Ferrule) compression fitting technologies.

## Features, Benefits and Values

Reference	Feature	Benefit	Value
1	Packing adjustment nut under lever	Allows removal of handle without compromising packing integrity Conforms to EEMUA 182	<b>Safety</b> <b>Performance &amp; Reliability</b>
2	Close to shape forgings	Strength Reduction in potential leak paths	<b>Safety</b> <b>Durability</b>
3	Slotted seats	Cavity relief on seats prevents over pressurisation of ball cavity. Conforms to EEMUA 182	<b>Safety</b>
4	Ergonomic vinyl sleeves	Easy to grip and comfortable	<b>Ease of Operation</b>
5	Longer and thicker gauge levers	Gives more hand clearance More rugged and positive feel	<b>Ease of Operation</b> <b>Durability</b>
6	Double D stem drive for 10mm bore size, rectangular drive on stems for bore sizes over 10mm	Ensures handle orientation is correct Conforms to EEMUA 182	<b>Performance &amp; Reliability</b> <b>Ease of Operation</b>
7	Integral compression ends available (A-LOK®, CPI™)	Reduces leak paths Removes the need for PTFE tape and sealant Reduces component costs	<b>Performance &amp; Reliability</b> <b>Lower overall cost</b>
8	Tru-Loc®	Prevents accidental disassembly of end loaded valves	<b>Safety</b>
9	Domed nut	Prevents dirt or corrosion compromising the thread integrity	<b>Safety</b> <b>Performance &amp; Reliability</b>
10	5mm Bleed Hole	Prevents plugging and conforms to EEMUA 182	<b>Performance &amp; Reliability</b>
11	Blowout proof stem	Prevents catastrophic failure and conforms to EEMUA 182	<b>Safety</b>
12	Metal identification label	Identify product part number, flow paths, material and temperature	<b>Safety</b>

## Pressure-Temperature Ratings for Seats

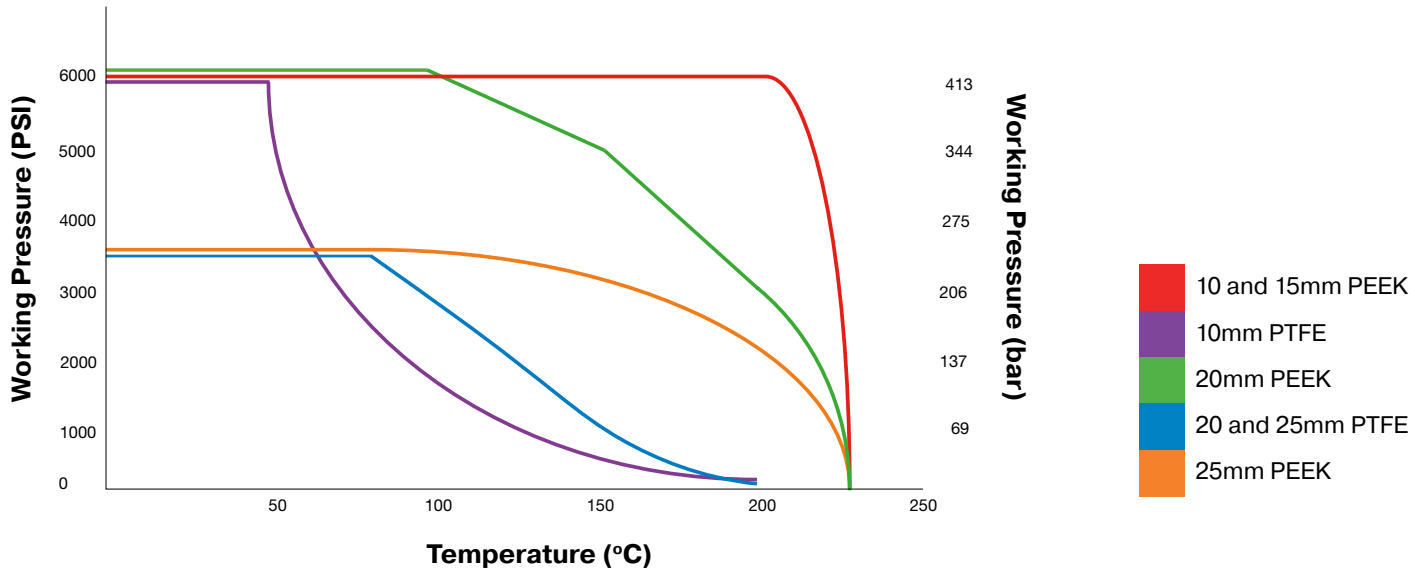




# Pro-Bloc® - Modular Single Piece DBB Valve

EP Series - EEMUA 182 Design Conformance

## Standard Head Designs

### Needle Valve H Series - Class 2500 (6,000 PSI)

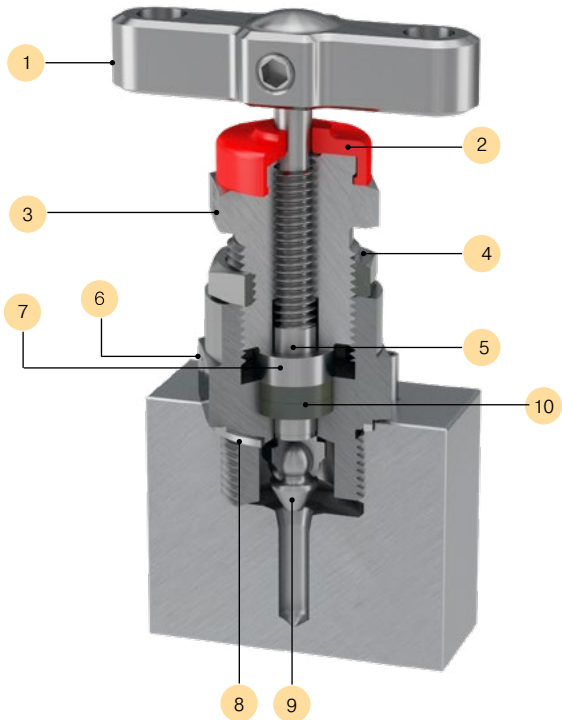


Reference	Description
1	Ergonomic 'T' bar style handle with positive retention
2	Dual purpose dust cap provides functional identification
3	Compensatory adjustable gland
4	Secure anti-vibration gland lock nut
5	Anti-blowout low torque back seating stem
6	All metal body bonnet seal
7	Gland thrust bush ensures uniform packing compression and tight sealing
8	Annealed sealing washer guarantees 100% sealing assurance
9	Self-centering, non-rotating stem tip guarantees bubble tight shut off
10	Gland packing below stem threads preventing thread lubricant wash-out

Notes:

- For products specified in optional materials, non-wetted parts will be 316 Stainless Steel as standard.

### Outside Screw and Yoke (OS&Y) - Class 2500 (6,000 PSI)

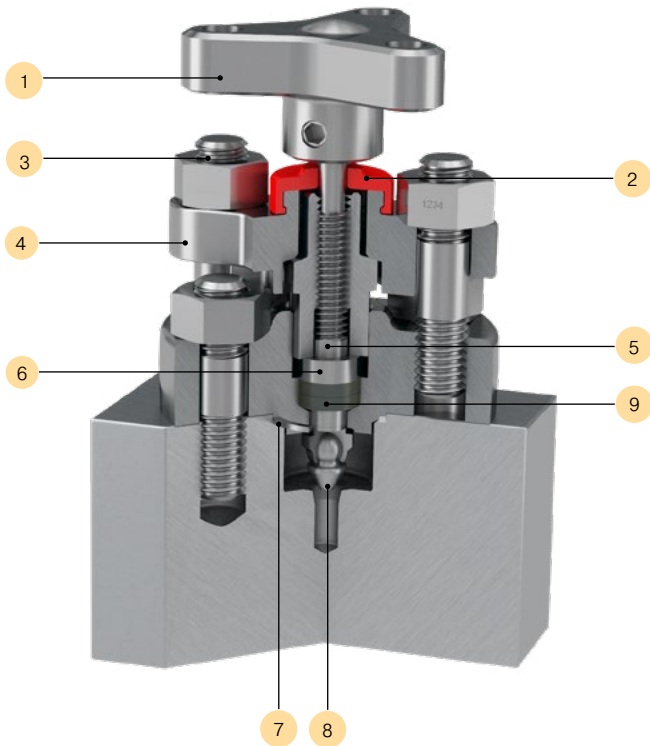

Reference	Description
1	Trilobe handle prevents excessive torque
2	Dual purpose dust cap provides functional identification
3	Packing adjustment nuts
4	Bridge (Yoke) provides downforce for packing
5	Anti-blowout low torque back seating stem
6	Gland thrust bush ensures uniform packing compression and tight sealing
7	Annealed sealing washer guarantees 100% sealing assurance
8	Self centering, non-rotating stem tip guarantees bubble tight shut off
9	Gland packing below stem threads preventing thread lubricant wash-out

Notes:

- For products specified in optional materials, non-wetted parts will be 316 Stainless Steel as standard.

## Pro-Bloc® Bore Size/Class Combinations

The shaded areas shown on the chart below indicate the available flange class/size per bore size. If not shaded the combinations cannot be manufactured on end entry type valves.

Flange		Raised Face				Ring Type Joint			
		Bore Size				Bore Size			
		10mm	15mm	20mm	25mm	10mm	15mm	20mm	25mm
150 LB	1/2"								
	3/4"								
	1"								
	1 1/2"								
	2"								
	2 1/2"								
	3"								
300 LB	1/2"								
	3/4"								
	1"								
	1 1/2"								
	2"								
	2 1/2"								
	3"								
600 LB	1/2"								
	3/4"								
	1"								
	1 1/2"								
	2"								
	2 1/2"								
	3"								
900/1500 LB	1/2"								
	3/4"								
	1"								
	1 1/2"								
	2"								
	2 1/2"								
	3"								
2500 LB	1/2"								
	3/4"								
	1"								
	1 1/2"								
	2"								
	2 1/2"								
	3"								

# Pro-Bloc® - Modular Single Piece DBB Valve

## EP Series - EEMUA 182 Design Conformance

### Ordering Information

<b>EPB</b>		<b>Y</b>		<b>100</b>		<b>E</b>	
<b>Series</b>		<b>Ball Valve Bore Size</b>		<b>Material</b>			
EP Pro-Bloc®	EPB	10 mm	Y	Available for arrangements 300, 400, 500, 600	316 Stainless Steel/ 316L ASTM A182-F316/ F316L	B	
		15 mm	X		Duplex A182-F51	E	
		20 mm	W		Low Temp Carbon Steel ASTM A350 LF2/ ASTM A105	H	
		25 mm	V		6MO ASTM 479/A276	K	
					Super Duplex ASTM A182-F53/F55	F	
					Alloy 825 ASTM B425	L	
					Alloy 625 ASTM B446	M	
Arrangement							
		Block-Bleed-Block 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	100			Block-Bleed-Block 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	200
		Block-Bleed-Block 1st Isolate: Ball 2nd Isolate: Ball Vent: Ball	120			Block-Bleed-Block 1st Isolate: Ball 2nd Isolate: Ball Vent: Ball	220
		Block-Bleed 1st Isolate: Ball Vent: Needle	130			Block-Bleed 1st Isolate: Ball Vent: Needle	230
		Block-Bleed 1st Isolate: Ball Vent: Ball	140			Block-Bleed 1st Isolate: Ball Vent: Ball	240
		Block-Bleed-Block (Modular Construction) 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	300			Block-Bleed-Block (Modular Construction) 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	400
		Block-Bleed-Block (Modular Construction) 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	500			Block-Bleed-Block (Modular Construction) 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	600

<b>8F150</b>				<b>A3</b>	<b>F</b>
<b>Flange Details</b>		<b>Seat and Construction Options</b>		<b>Compliance</b>	
Flange Size	Flange Style	PTFE Ball Seats		Fire Safe (Graphite packing)	F
1/2"	8	PEEK Ball Seats		NACE	N
3/4"	12	Needle Tip 17-4PH St. St		Fire Safe & NACE	FN
1"	16	* Fitted as standard - No part number designator required		Where fire safe is not required, the default stem packing will be PTFE.	
1 1/2"	24			Certification requirements and customer specifications MUST be provided at enquiry and order stage.	
2"	32				
See page 29 for bore size/class combinations.					
		<b>Optional Outlet Connection</b>		<b>Valve Handle Options</b>	
3/8"	6	Female NPT	F	Anti-tamper (vent) (Needle valve only)	A*
1/2"	8	A-LOK®	A	Padlock handle locking	L*
3/4"	12	CPI™	Z	O.S. & Y. Needle Valve (vent)	Y
1"	16	The following standard outlet connections do not require a part number designator:		* Insert valve number	
10 mm	M10	10 mm bore = 1/2" Female NPT		1 = Primary	
12 mm	M12	15 mm bore = 1/2" Female NPT		2 = Secondary	
		20 mm bore = 3/4" Female NPT		12 = Primary and Secondary	
				3 = Vent	
				4 = All	
				NB: Padlocks not supplied	

### Head Assembly Options



#### Anti-tamper spindle

This design valve head is to prevent accidental opening of the vent.  
All valves with this anti-tamper spindle are supplied with a key.



#### T bar handle locking

This design valve head is to prevent unauthorised operation of the valve. The hole size is 6mm (0.24").  
Padlocks are not provided.



#### Key

The Key is necessary to open or close the anti-tamper spindle (vent valve). The Key is also available to purchase as a separate item. Please note, image of the key is not to scale compared with the anti-tamper spindle.

#### Notes:

- Plugged vent 1/2" Female NPT as standard. 1/2" NPT plug supplied loose.
- All non wetted parts will be supplied in standard stainless steel for corrosion resistant alloys. For carbon steel construction trim materials will be supplied in stainless steel
- For flange to flange construction when the required flanges are different sizes then specify both sizes example: 1st flange 1" pipe (16), raised face (F), class 900 (900), 2nd flange 1/2" (8), raised face (F), class 900 (900) insert: 16F9008F900. Consult factory for available combinations

# Pro-Bloc® - Modular Single Piece DBB Valve


## Sampling and Injection Applications

ESP and EJP Series - EEMUA 182 Design Conformance

### Overview



Pro-Bloc® ESP and EJP Series range is designed to replace conventional multiple-valve installations where sampling of the process stream or injection into the process stream at full system pressure is required. Both valve series include a probe/quill. The EJP Series features a high integrity full bore non-return valve to eliminate the risk of back flow out of the process stream.

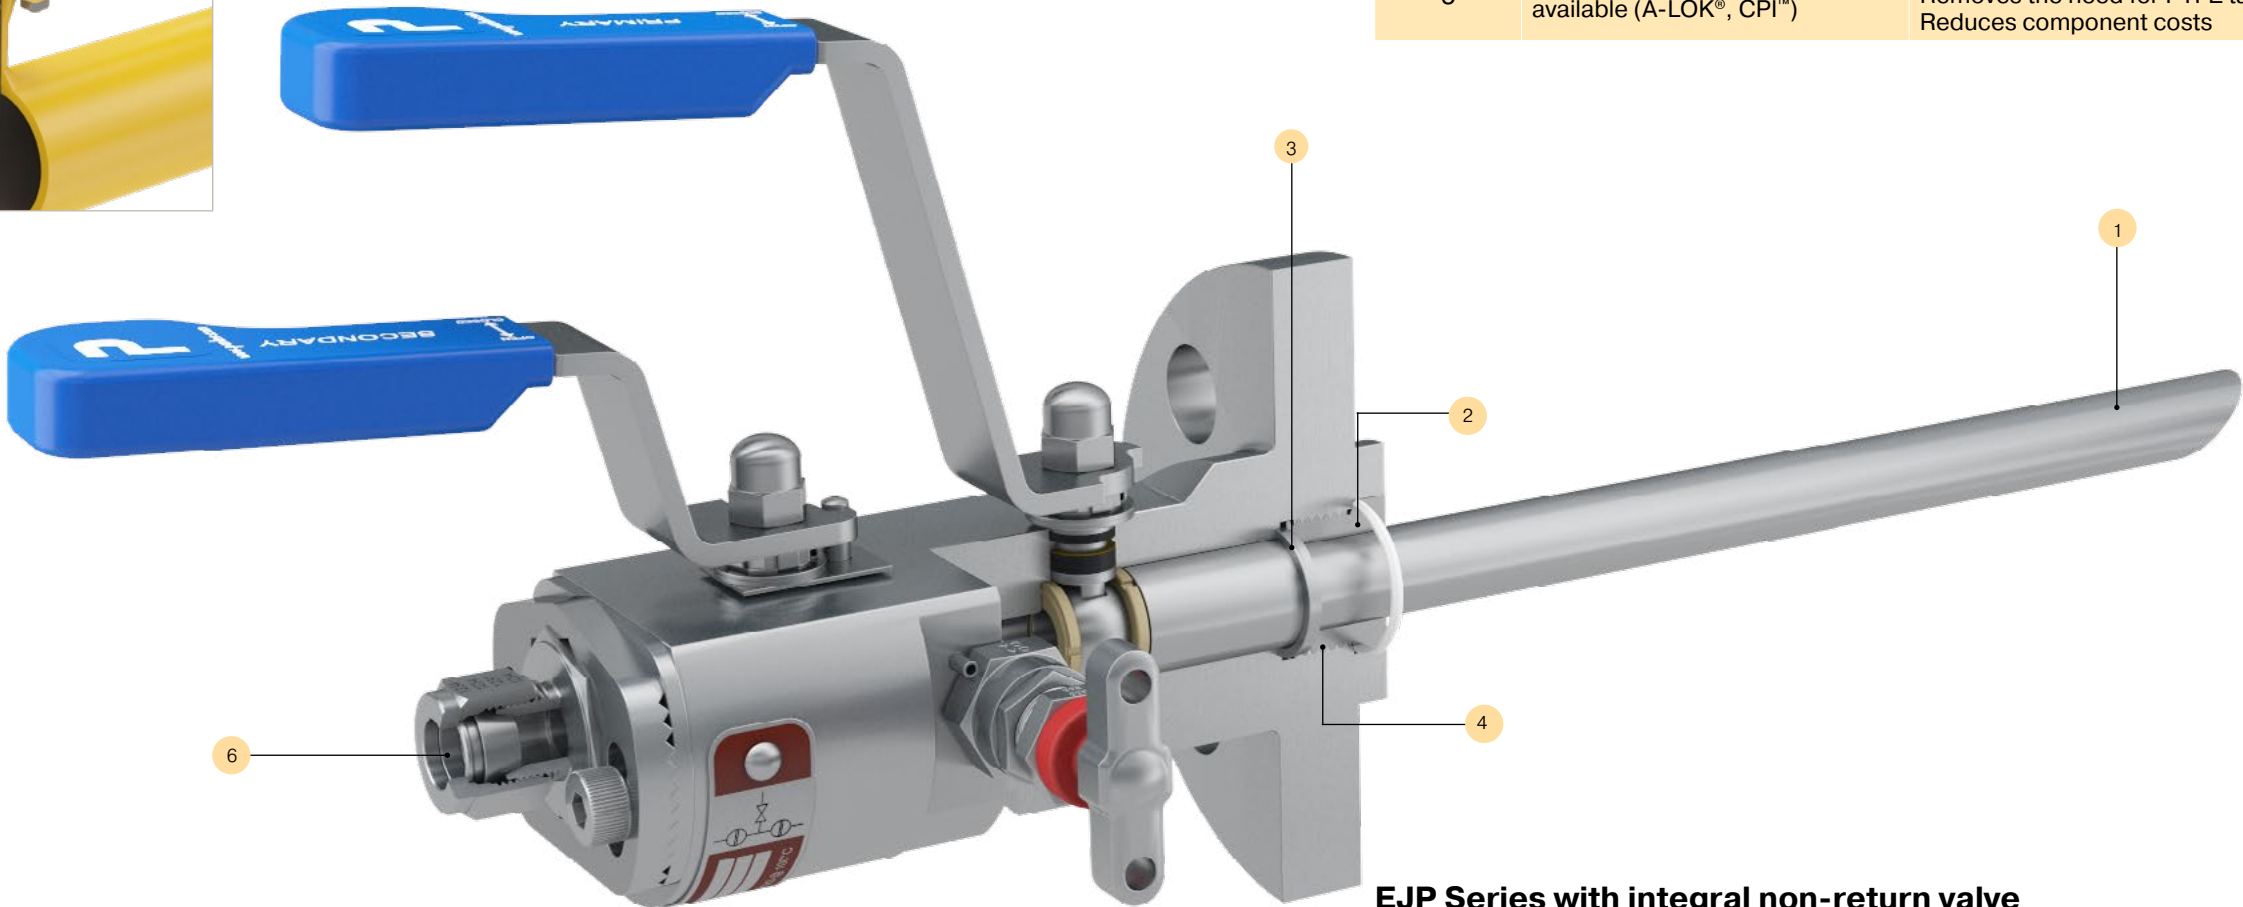

### Features, Benefits and Values

Reference	Feature	Benefit	Value
1	Gun-drilled sample/injection quill	Machined from solid bar, giving strength to resist vibration	<b>Durability Safety</b>
2	Environmental seal	Prevents inboard and outboard leakage	<b>Performance &amp; Reliability</b>
3	Integral locking collar	Provides accurate location of quill giving optimum pressure on seat ensuring seat tightness and allowing low torque actuation of the valve	<b>Performance &amp; Reliability Safety</b>
4	Mechanical locking mechanism	Solid mechanical fixing, no welding involved	<b>Performance &amp; Reliability Safety</b>
5	Self centering poppet seal (EJP Series)	Ensures full sealing capability, preventing excessive wear of poppet o-ring	<b>Performance &amp; Reliability</b>
6	Integral compression ends available (A-LOK®, CPI™)	Reduces leak paths Removes the need for PTFE tape and sealant Reduces component costs	<b>Performance &amp; Reliability Lower overall cost</b>

### EJP Series with integral non-return valve

This high integrity full bore non-return (check) valve eliminates the risk of back flow out of the process stream. The design utilises a spring loaded poppet to ensure leak proof performance. The non return valve is designed for higher flow and low pressure drop across the valve - having a larger through bore than most other manufacturers equivalent product.

As standard a viton seal will be supplied with a 'cracking' pressure of 10 PSI. A wide variety of seat materials and cracking pressures are available on request.





# Pro-Bloc® - Modular Single Piece DBB Valve

## Sampling and Injection Applications

ESP and EJP Series - EEMUA 182 Design Conformance

### Ordering Information

ESPB

Series

Sampling Pro-Bloc®	ESPB
Injection Pro-Bloc®	EJPB

Y

Ball Valve Bore Size

10 mm	Y
15 mm	X

100

Arrangement

		Block-Bleed-Block 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	100
		Block-Bleed 1st Isolate: Ball Vent: Needle	130

E

Material

316 Stainless Steel/ 316L ASTM A182-F316/ F316L	B
Duplex A182-F51	E
Low Temp Carbon Steel ASTM A350 LF2/ ASTM A105	H
6MO ASTM 479/A276	K

8F150

Flange Details

Flange Size		Flange Style		Flange Class	
1"	16	Raised Face Spiral	F	150	150
1 1/2"	24	Ring Type Joint	T	300	300
2"	32			600	600
				900	900
				1500	1500
				2500	2500

10mm bore size 1" and above ASME flanges up to class 2500  
15mm bore size 1 1/2" and above ASME flanges up to class 2500

8A

Seat and Construction Options

PTFE Ball Seats	*
PEEK Ball Seats	PB
Needle Tip 17-4PH St. St	*

\* Fitted as standard - No part number designator required

Optional Outlet Connection

3/8"	6	Female NPT	F
1/2"	8	A-LOK®	A
10 mm	M10	CPI™	Z
12 mm	M12		

The following standard outlet connections do not require a part number designator:  
10 mm bore = 1/2" Female NPT  
15 mm bore = 1/2" Female NPT

Valve Handle Options

Anti-tamper (vent) (Needle valve only)	A*
Padlock handle locking	L*
O.S. & Y. Needle Valve (vent)	Y*

\* Insert valve number:  
1 - Primary  
2 - Secondary  
3 - Vent  
4 - All  
Padlocks not supplied.

Compliance

Fire Safe (Graphite packing)	F
NACE	N
Fire Safe & NACE	FN

Where fire safe is not required, the default stem packing will be PTFE.  
Certification requirements and customer specifications MUST be provided at enquiry and order stage.

Probe Length (mm)

Maximum probe length 750 mm
-----------------------------

-

100

- Notes:
- Probe length must be specified from the raised face to the end of the probe in mm, to the nearest mm
  - Probes are supplied to suit the insertion length dictated by the pipeline diameter and thus must be specified by the customer
  - A variety of end preparations and support collars are available
  - Wake frequency calculations can be carried out against pipeline flow rates on request

### Head Assembly Options

**Anti-tamper spindle**

This design valve head is to prevent accidental opening of the vent.

All valves with this anti-tamper spindle are supplied with a key.

**T bar handle locking**

This design valve head is to prevent unauthorised operation of the valve. The hole size is 6mm (0.24").

Padlocks are not provided.

**Key**

The Key is necessary to open or close the anti-tamper spindle (vent valve). The Key is also available to purchase as a separate item. Please note, image of the key is not to scale compared with the anti-tamper spindle.

# Low Emissions Pro-Bloc® - Modular Single Piece DBB Valve


## FM Series - 10mm Bore

Parker offer Pro-Bloc® Modular Single Piece DBB valves in accordance to ISO 15848-1. The valves prototype testing (part 1) is third party witnessed and verified. All valves are production tested to part 2 of the standard.

### Technical Specifications

Bore sizes	10 mm
Seat materials	PEEK (ball valve) Metal to Metal (needle valve)
Packing material	Graphite
Body materials	Stainless Steel ASTM A182-F316/F316L Duplex A182-F51 Super Duplex ASTM A182-F53/F55 Low Temp Carbon Steel ASTM A350 LF2/ ASTM A105 6Mo Alloy 625 Alloy 825
Max. Working Temperature (FE)	150° C (302° F)
Min. Working Temperature	-29° C (-20° F); non-operable at -50° C (-58° F)
Max. Working Pressure	6,249 PSI (431 bar)
Tightness class B	≤1.78 x 10 <sup>-6</sup> mbarl/(s mm <sub>dia</sub> )

### Pressure-Temperature Ratings for Ball Valve PEEK Seat

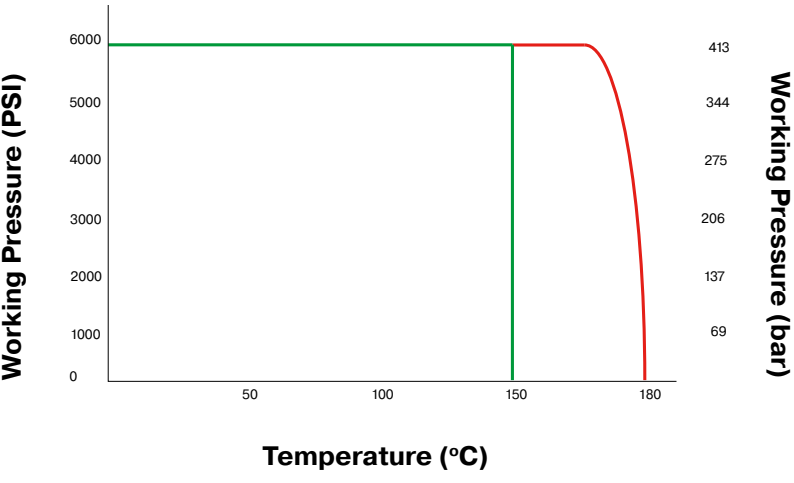

Pro-Bloc® FE Series valve (10mm bore) in accordance to ISO15848-1


### Design Standards:

- ISO15848-1
- EEMUA 182
- Body wall thickness: ASME B16.34/ASME VIII Div. I
- Fire safe: API 6FA and API 607
- NACE

### Notes:

- Production testing and certification available on request
- ISO15848-1 prototype tested using global helium vacuum method

### Features, Benefits and Values

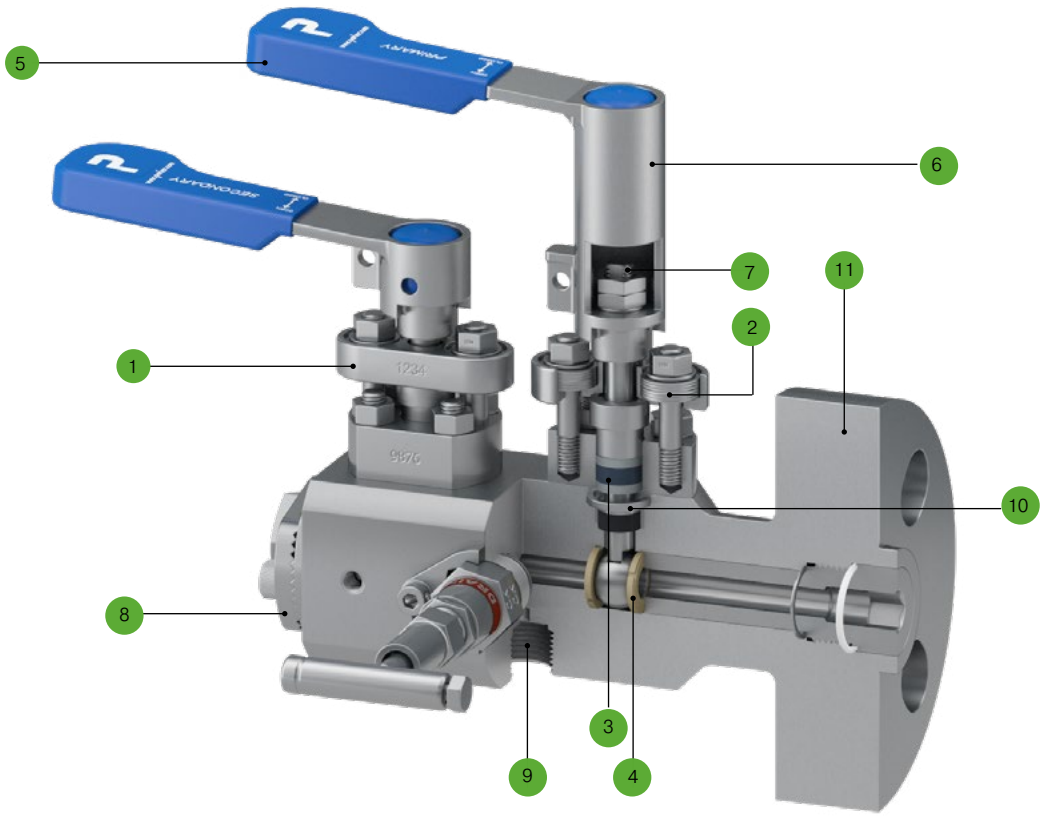


Reference	Feature	Benefit	Value
1	Packing adjustment outside screw and yoke	Allows removal of handle without compromising packing integrity	<b>Safety</b> <b>Performance &amp; Reliability</b>
2	Belleville washers	Belleville washers maintain load on packing, reducing packing adjustment and ensuring FE capability	<b>Safety</b> <b>Performance &amp; Reliability</b>
3	Graphite stem packing	Live loaded for FE capability and to compensate for wear	<b>Safety</b> <b>Performance &amp; Reliability</b>
4	Slotted seats	Cavity relief on seats prevents over pressurisation of ball cavity. Conforms to EEMUA 182	<b>Safety</b>
5	Ergonomic vinyl sleeves	Easy to grip and comfortable	<b>Ease of Operation</b>
6	Longer and thicker gauge levers	Gives more hand clearance More rugged and positive feel	<b>Ease of Operation</b> <b>Durability</b>
7	Double D stem drive for 10mm bore size, rectangular drive on stems for bore sizes over 10mm	Ensures handle orientation is correct Conforms to EEMUA 182	<b>Performance &amp; Reliability</b> <b>Ease of Operation</b>
8	Tru-Loc®	Prevents accidental disassembly of end loaded valves	<b>Safety</b>
9	5mm Bleed Hole	Prevents plugging and conforms to EEMUA 182	<b>Performance &amp; Reliability</b>
10	Blowout proof stem	Prevents catastrophic failure and conforms to EEMUA 182	<b>Safety</b>
11	Close to shape forgings	Strength Reduction in potential leak paths	<b>Safety</b> <b>Durability</b>



# Low Emissions Pro-Bloc® - Modular Single Piece DBB Valve

FM Series - 10mm Bore

Low Emissions needle valve head design

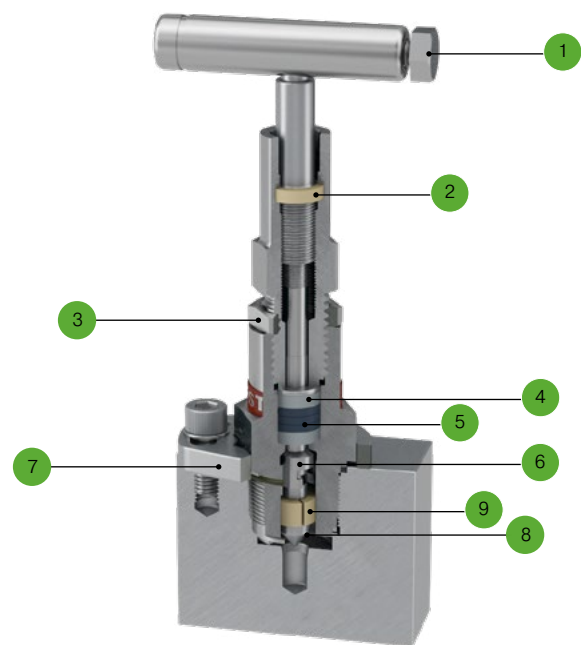

Reference	Description
1	Ergonomic 'T' bar style handle with positive retention
2	PEEK upper stem support gland
3	Secure anti-vibration gland lock nut
4	Gland thrust bush
5	Graphite packing
6	Anti-blowout low torque back seating stem
7	Tru-Loc® bonnet locking plate
8	Self-centering, non-rotating stem for bubble tight shut off
9	PEEK lower stem support gland

## Bill of Materials

Description	Stainless Steel	Carbon Steel	Duplex
Body	316/316L St.Stl ASTM A182-F316/F316L	ASTM A105 /A350-LF2	Duplex St.Stl ASTM A182-F51
End Connections and Flange Inserts	316/316L St.Stl ASTM A479 UNS S31600/S31603	ASTM A105 /A350-LF2	Duplex St.Stl ASTM A479 UNS S31803
Ball Valve Ball	316/316L St.Stl ASTM A479 UNS S31600/S31603		Duplex St.Stl ASTM A479 UNS S31803
Ball Valve Stems	316/316L St.Stl ASTM A479 UNS S31600/S31603		Duplex St.Stl ASTM A479 UNS S31803
Ball Valve Seats	PEEK		
Ball Valve Packing	Graphite		
Body Seals	316/316L St.Stl ASTM A479 UNS S31600/S31603 Graphite		6MO ASTM A479 UNS S31254
Needle Valve Stem	316/316L St.Stl ASTM A479 UNS S31600/S31603		Duplex St.Stl ASTM A479 UNS S31803
Needle Valve Tip	17/4 PH St.Stl ASTM A564/A564M UNS S17400		Super Duplex St.Stl ASTM A479 UNS S32750/S32760
Needle Valve Screwed Bonnet and Gland Adjuster	316/316L St.Stl ASTM A479 UNS S31600/S31603		Duplex St.Stl ASTM A479 UNS S31803
All other components	316 St.Stl		





# Low Emissions Pro-Bloc® - Modular Single Piece DBB Valve

FM Series - 10mm Bore

## Ordering Information

FMPBY

Series

Low Emissions Pro-Bloc®

FMPB

Y

Ball Valve Bore Size

10 mm

FMPBY

100

Arrangement

Available for arrangements 300, 400, 500, 600

B

Material

316 Stainless Steel/ 316L ASTM A182-F316/ F316L

B

Duplex A182-F51

E

Low Temp Carbon Steel ASTM A350 LF2/ ASTM A105

H

6MO ASTM 479/A276

K

Super Duplex ASTM A182-F53/F55

F

Alloy 825 ASTM B425

L

Alloy 625 ASTM B446

M

Arrangement							
		Block-Bleed-Block 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	100			Block-Bleed-Block 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	200
		Block-Bleed-Block 1st Isolate: Ball 2nd Isolate: Ball Vent: Ball	120			Block-Bleed-Block 1st Isolate: Ball 2nd Isolate: Ball Vent: Ball	220
		Block-Bleed 1st Isolate: Ball Vent: Needle	130			Block-Bleed 1st Isolate: Ball Vent: Needle	230
		Block-Bleed 1st Isolate: Ball Vent: Ball	140			Block-Bleed 1st Isolate: Ball Vent: Ball	240
		Block-Bleed-Block (Modular Construction) 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	300			Block-Bleed-Block (Modular Construction) 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	400
		Block-Bleed-Block (Modular Construction) 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	500			Block-Bleed-Block (Modular Construction) 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	600

8F136

Optional Outlet Connection

3/8"	6	Female NPT	F
10 mm	M10	A-LOK®	A
12 mm	M12	CPI™	Z

1/2" Female NPT standard vent, no designator required

A3

F

Compliance

Fire Safe (Graphite packing)	F
NACE	N
Fire Safe & NACE	FN

Certification requirements and customer specifications MUST be provided at enquiry and order stage.

Flange Details					
Flange Size		Flange Style		Flange Class	
1/2"	8	Raised Face Spiral	F	1/2"	150, 300, 600 136
3/4"	12	Ring Type Joint	T	3/4"	900, 1500, 2500 1525
1"	16			3/4"	150 150
1-1/2"	24			3/4"	300, 600 600
2"	32			3/4"	900, 1500, 2500 1525
				1"	150 150
				1"	300, 600 600
				1-1/2"	900 900
				2"	1500 1500
				2"	2500 2500

Valve Handle Options	
Anti Tamper Needle Valve Only	A*
Padlock Handle Locking	L*

\* Insert valve number  
1 = Primary  
2 = Secondary  
12 = Primary and Secondary  
3 = Vent  
4 = All

NB: Padlocks not supplied



- Notes:
- Plugged vent 1/2" Female NPT as standard. 1/2" NPT plug supplied loose.
  - All non wetted parts will be supplied in standard stainless steel for corrosion resistant alloys. For carbon steel construction trim materials will be supplied in stainless steel
  - All valves are graphite packed as standard, No PTFE option available
  - All valves are Fire Safe as standard
  - All ball valves are PEEK seated
  - Materials are offered to NACE as standard

# Low Emissions Pro-Bloc® - Modular Single Piece DBB Valve

## FE Series - 15 and 20 mm Bore, Bolted Bonnet Design

Parker offer Pro-Bloc® Modular Single Piece DBB valves in accordance to ISO 15848-1. The valves prototype testing (part 1) is third party witnessed and verified. All valves are production tested to part 2 of the standard.

### Technical Specifications

Bore sizes	15 mm, 20 mm
Seat materials	PEEK (ball valve) Metal to Metal (needle valve)
Packing material	Graphite
Body materials	Stainless Steel ASTM A182-F316/F316L Duplex A182-F51 Super Duplex ASTM A182-F53/F55 Low Temp Carbon Steel ASTM A350 LF2/ ASTM A105 6Mo Alloy 625 Alloy 825
Max. Working Temperature	180° C (356° F)
Min. Working Temperature	-29° C (-20° F)
Max. Working Pressure	6,249 PSI (431 bar)
Tightness class A	≥1 x 10 <sup>-6</sup> mg.s <sup>-1</sup> .m <sup>-1</sup>
Performance class	ISO FE AH-C01-SSA1-t (RT,180°C)-ANSI2500-ISO 15848-1


### Design Standards:

- ISO15848-1 class A and B
- EEMUA 182
- Body wall thickness: ASME B16.34/ASME VIII Div. I
- Fire safe: API 6FA and API 607
- NACE


### Notes:

- Production testing and certification available on request
- ISO15848-1 prototype tested using global helium vacuum method

### Pressure-Temperature Ratings for Seats

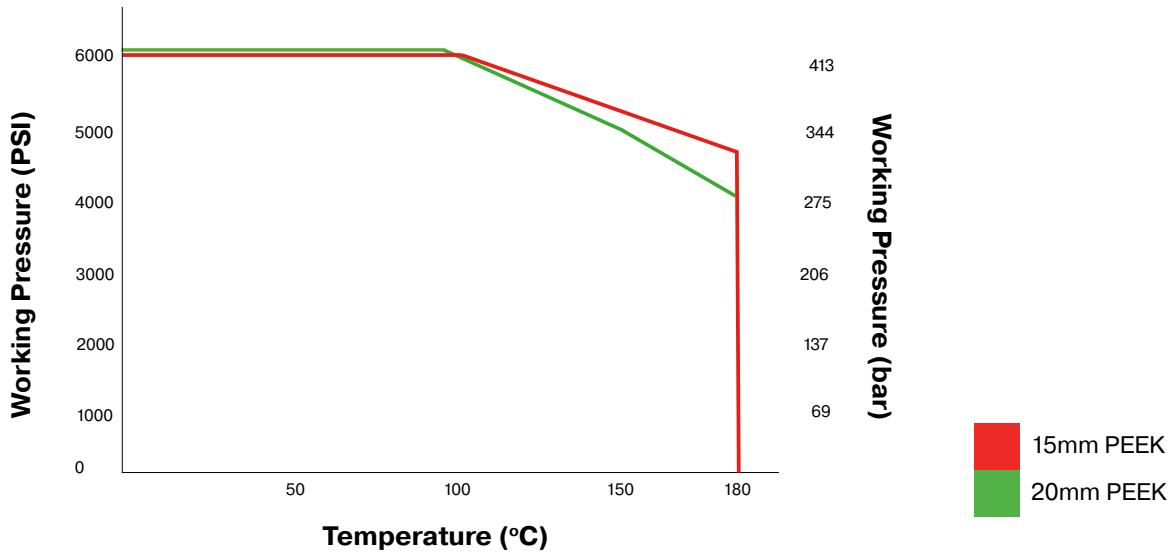

### Features, Benefits and Values

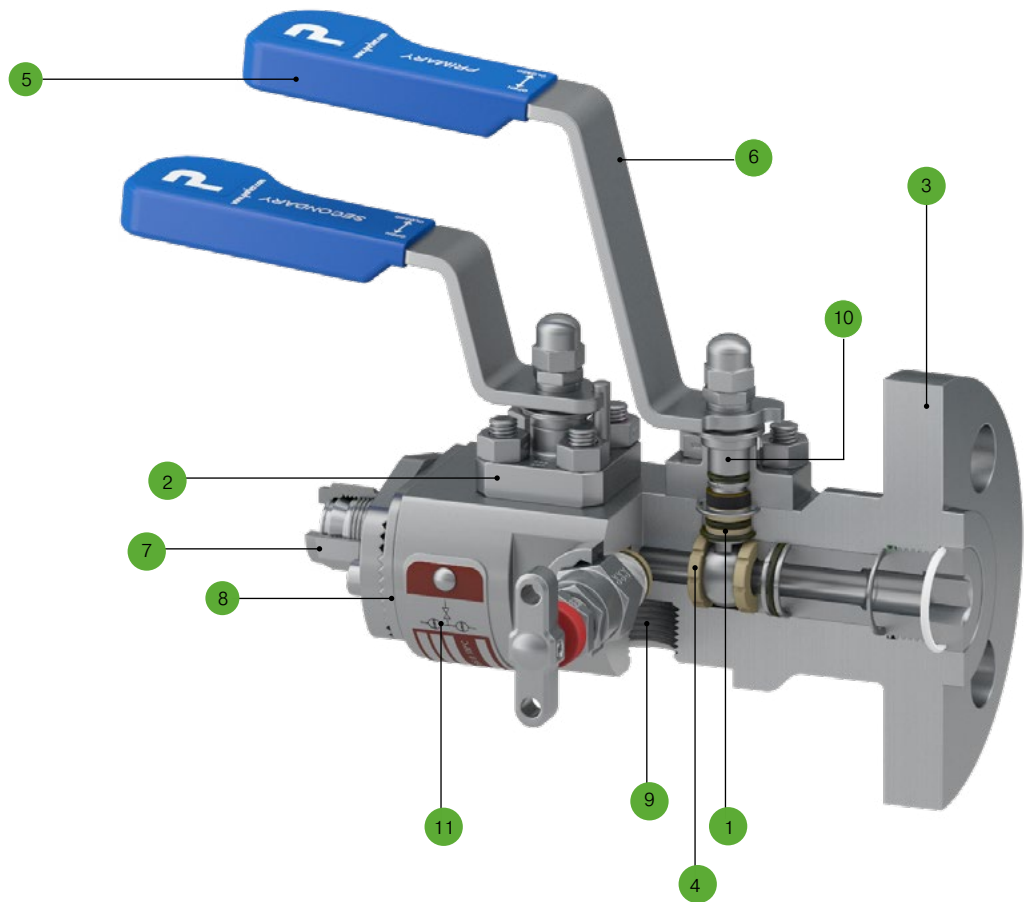


Reference	Feature	Benefit	Value
1	Stem O-ring seals	Provides the sealing of system media and prevents leakage to atmosphere	Performance
2	Bolted bonnet construction	Permits a longer stem design to be incorporated allowing more bushing for guidance and stem seals	Durability
3	Close to shape forgings	Strength Reduction in potential leak paths	Safety Durability
4	Slotted seats	Cavity relief on seats prevents over pressurisation of ball cavity. Conforms to EEMUA 182	Safety
5	Ergonomic vinyl sleeves	Easy to grip and comfortable	Ease of Operation
6	Longer and thicker gauge levers	Gives more hand clearance More rugged and positive feel	Ease of Operation Durability
7	Integral compression ends available (A-LOK®, CPI™)	Reduces leak paths Removes the need for PTFE tape and sealant Reduces component costs	Performance & Reliability Lower overall cost
8	Tru-Loc®	Prevents accidental disassembly of end loaded valves	Safety
9	5mm Bleed Hole	Prevents plugging and conforms to EEMUA 182	Performance & Reliability
10	Blowout proof stem	Prevents catastrophic failure and conforms to EEMUA 182	Safety
11	Metal identification label	Identify product part number, flow paths, material and temperature	Safety

# Low Emissions Pro-Bloc® - Modular Single Piece DBB Valve

FE Series - 15 and 20 mm Bore, Bolted Bonnet Design

## Low Emissions needle valve head design

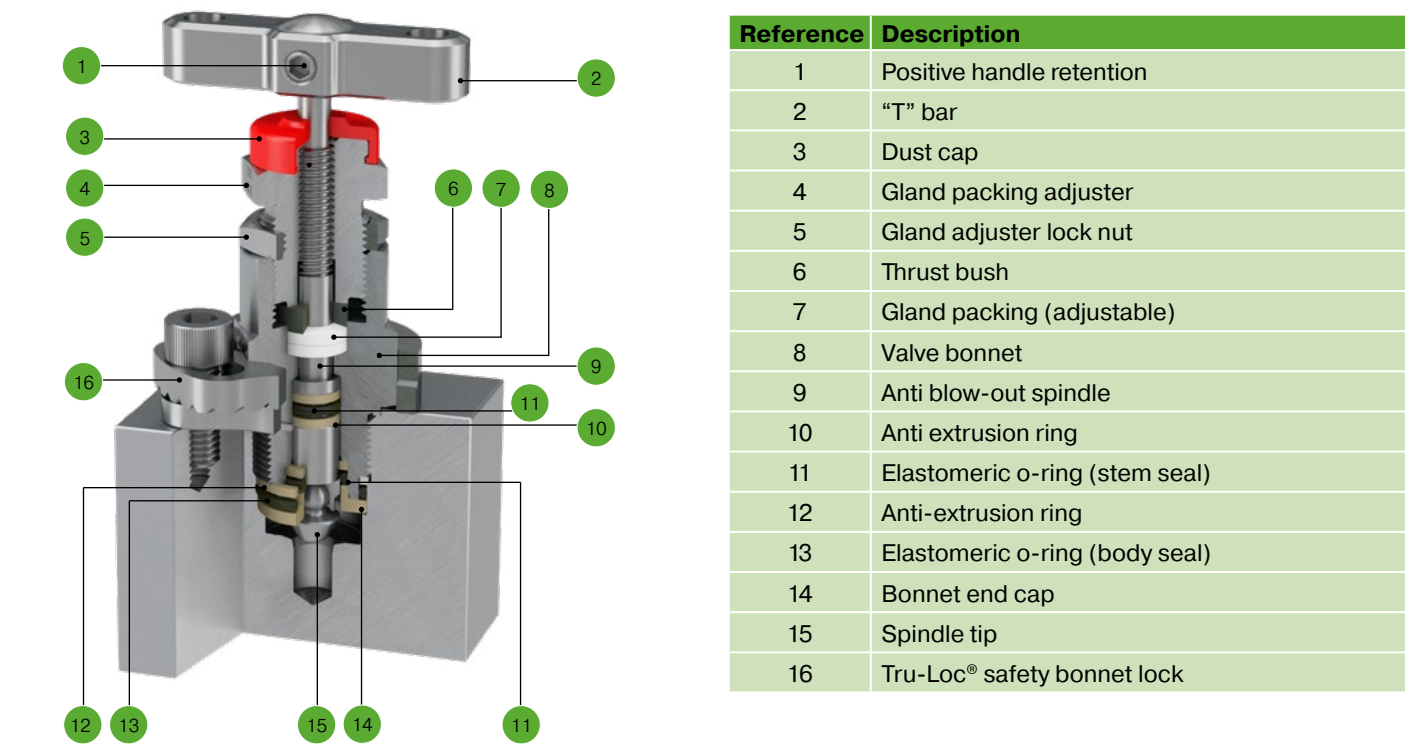


## Tru-Loc® safety bonnet lock



The unique Parker Tru-Loc® security locking system is applied to the body-bonnet interface. It can also be applied to many other screwed component interfaces. Extensive tests have proven that threaded connection interfaces secured with Tru-Loc® guarantee 100% security in preventing movement between connected components. This lock also prevents accidental loosening or removal of the bonnet assembly.

## Low Emissions Outside Screw and Yoke (OS&Y)

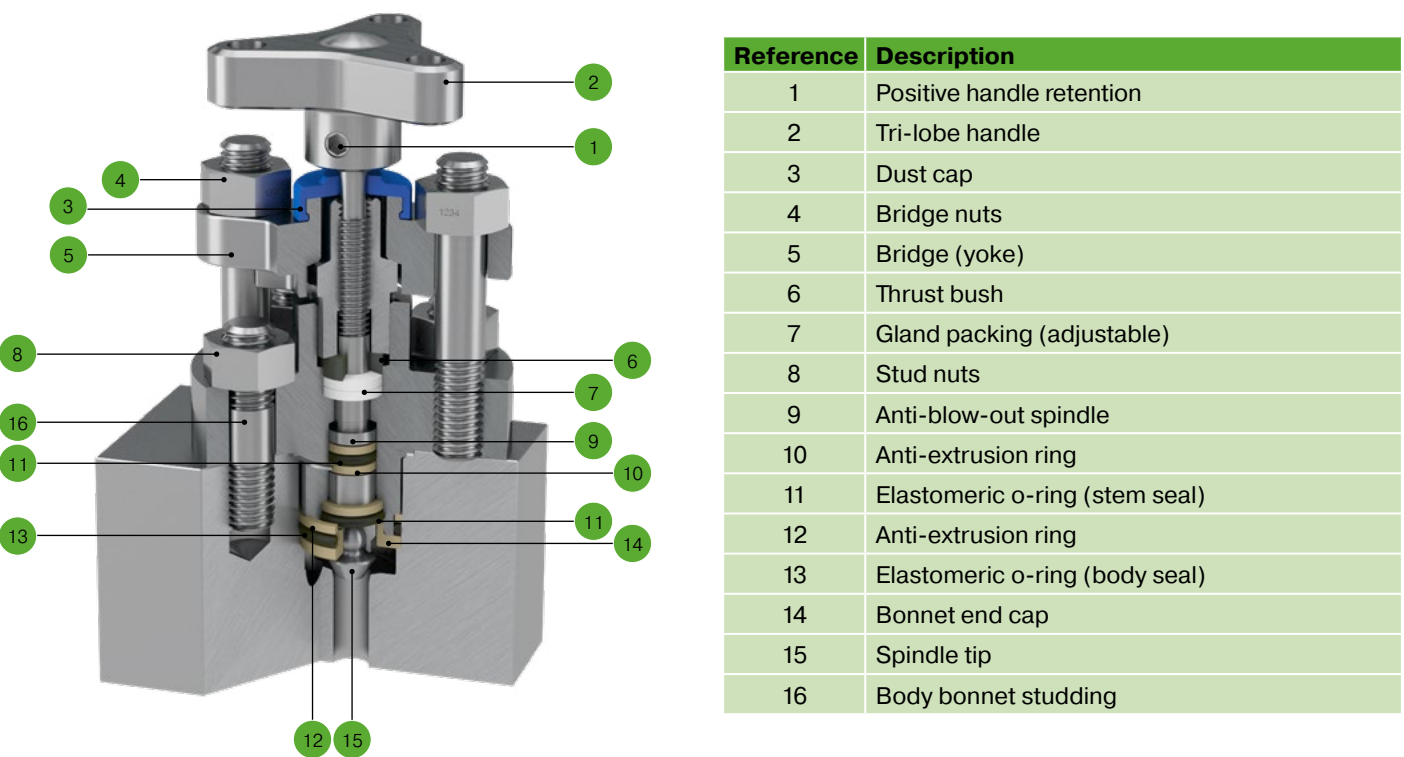

## Bill of Materials

Description	Stainless Steel	Carbon Steel	Duplex
Body	316/316L St.Stl ASTM A182-F316/F316L	ASTM A105 /A350-LF2	Duplex St.Stl ASTM A182-F51
End Connections and Flange Inserts	316/316L St.Stl ASTM A479 UNS S31600/S31603	ASTM A105 /A350-LF2	Duplex St.Stl ASTM A479 UNS S31803
Ball Valve Ball	316/316L St.Stl ASTM A479 UNS S31600/S31603		Duplex St.Stl ASTM A479 UNS S31803
Ball Valve Stems	316/316L St.Stl ASTM A479 UNS S31600/S31603		Duplex St.Stl ASTM A479 UNS S31803
Ball Valve Seats	PEEK		
Ball Valve Packing	Graphite		
Body Seals	316/316L St.Stl ASTM A479 UNS S31600/S31603 Graphite		6MO ASTM A479 UNS S31254
Needle Valve Stem	316/316L St.Stl ASTM A479 UNS S31600/S31603		Duplex St.Stl ASTM A479 UNS S31803
Needle Valve Tip	17/4 PH St.Stl ASTM A564/A564M UNS S17400		Super Duplex St.Stl ASTM A479 UNS S32750/S32760
Needle Valve Screwed Bonnet and Gland Adjuster	316/316L St.Stl ASTM A479 UNS S31600/S31603		Duplex St.Stl ASTM A479 UNS S31803
All other components	316 St.Stl		



# Low Emissions Pro-Bloc® - Modular Single Piece DBB Valve

FE Series - 15 and 20 mm Bore

## Ordering Information

Series		Ball Valve Bore Size		Material	
Low Emissions Pro-Bloc® Class A	FEPB	15 mm	X	316 Stainless Steel/ 316L ASTM A182-F316/ F316L	B
Low Emissions Pro-Bloc® Class B	FEBPB	20 mm	W	Duplex A182-F51	E
				Low Temp Carbon Steel ASTM A350 LF2/ ASTM A105	H
				6MO ASTM 479/A276	K
				Super Duplex ASTM A182-F53/F55	F
				Alloy 825 ASTM B425	L
				Alloy 625 ASTM B446	M

Available for arrangements 300, 400, 500, 600

Arrangement							
		Block-Bleed-Block 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	100			Block-Bleed-Block 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	200
		Block-Bleed-Block 1st Isolate: Ball 2nd Isolate: Ball Vent: Ball	120			Block-Bleed-Block 1st Isolate: Ball 2nd Isolate: Ball Vent: Ball	220
		Block-Bleed 1st Isolate: Ball Vent: Needle	130			Block-Bleed 1st Isolate: Ball Vent: Needle	230
		Block-Bleed 1st Isolate: Ball Vent: Ball	140			Block-Bleed 1st Isolate: Ball Vent: Ball	240
		Block-Bleed-Block (Modular Construction) 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	300			Block-Bleed-Block (Modular Construction) 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	400
		Block-Bleed-Block (Modular Construction) 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	500			Block-Bleed-Block (Modular Construction) 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle	600

Flange Details						Optional Outlet Connection				Valve Handle Options		Compliance	
Flange Size		Flange Style		Flange Class									
1/2"	8	Raised Face Spiral	F	150	150	3/8"	6	Female NPT	F	Anti Tamper Needle Valve Only	A*	Fire Safe (Graphite packing)	F
3/4"	12	Ring Type Joint	T	300, 600	600	10 mm	M10	A-LOK®	A	Padlock Handle Locking	L*	NACE	N
1"	16			900	900	12 mm	M12	CPI™	Z			Fire Safe & NACE	FN
1 1/2"	24			1500	1500	1/2" Female NPT standard vent, no designator required							
2"	32			2500	2500								

\* Insert valve number  
1 = Primary  
2 = Secondary  
12 = Primary and Secondary  
3 = Vent  
4 = All  
NB: Padlocks not supplied

Where fire safe is not required, the default stem packing will be PTFE.  
Certification requirements and customer specifications MUST be provided at enquiry and order stage.

## Head Assembly Options



### Anti-tamper spindle

This design valve head is to prevent accidental opening of the vent.  
All valves with this anti-tamper spindle are supplied with a key.



### T bar handle locking

This design valve head is to prevent unauthorised operation of the valve.  
The hole size is 6mm (0.24").  
Padlocks are not provided.



### Key

The Key is necessary to open or close the anti-tamper spindle (vent valve).  
The Key is also available to purchase as a separate item. Please note, image of the key is not to scale compared with the anti-tamper spindle.

### Notes:

- Plugged vent 1/2" Female NPT as standard. 1/2" NPT plug supplied loose.
- All non wetted parts will be supplied in standard stainless steel for corrosion resistant alloys. For carbon steel construction trim materials will be supplied in stainless steel.
- For flange to flange construction when the required flanges are different sizes then specify both sizes example: 1st flange 1" pipe (16), raised face (F), class 900 (900), 2nd flange 1/2" (8), raised face (F), class 900 (900) insert: 16F9008F900. Consult factory for available combinations.
- All valves are graphite packed as standard, No PTFE option available
- All valves are Fire Safe as standard
- Materials are offered to NACE as standard.


# Pro-Bloc® - Three Piece DBB Valve

FP Series - Floating Ball

## Overview

Parker’s Pro-Bloc® FP series valves with floating ball design utilise both soft seats or metal seats or metal seats for bubble-tight sealing at a wide range of pressures and temperatures.

The valves have double block and bleed function and consist of two separate isolating balls and one vent in a single unit. This three-piece construction offers space and weight saving benefits over the traditional method of using three separate valves in process piping applications. These valves (excluding 15 mm bore) are supplied to the API 6D standard.

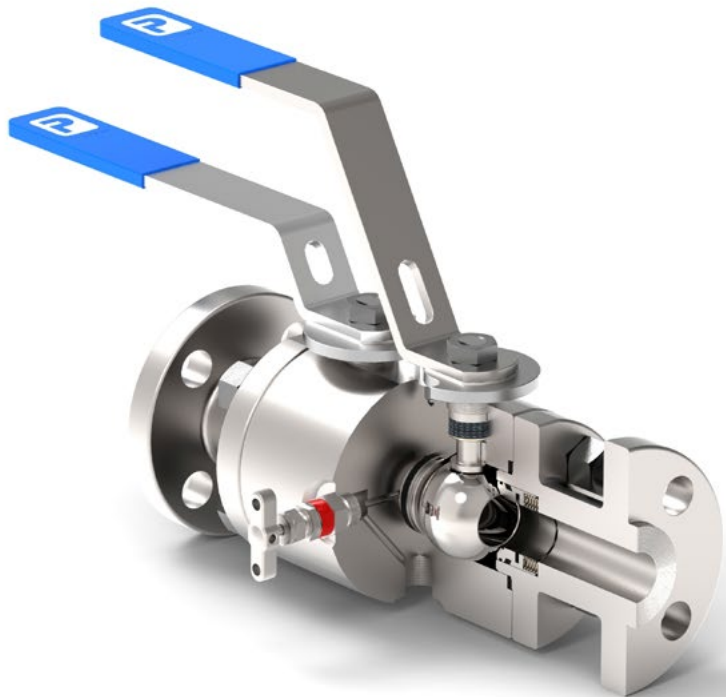

## Markets / Applications:

- Petrochemical
- Low temperature and LNG (tankers, terminals, platforms, plants, air separation)
- Chemical
- Oil and Gas

## Design Standards:

- Design: ASME B16.34, EEMUA 182
- Design pressure: ASME B16.34
- Body wall thickness: ASME B16.34, ASME VIII Div. I
- Fire safe: API 6FA and API 607


## Technical Specifications:

Bore sizes	15 mm, 25 mm, 38 mm, 50 mm
Seat materials	TFM, PEEK, Metal
Body materials	316 Stainless Steel ASTM A182-F316/ UNS S31600 Duplex ASTM A182-F51 / UNS S31803 Super Duplex ASTM A182-F53/F55 Low Temp Carbon Steel ASTM A350 LF2 Alloy 625 UNS N06625 Alloy 825 UNS N08825
Valve configurations	Flange x screw Flange x flange
Max. Working Temperature	360° C
Min. Working Temperature	-196° C
Max. Working Pressure	6,250 PSI (431 bar)

## Features, Benefits and Values

Feature	Benefit	Value
Three-piece design	Suitable for various piping configurations	Flexibility
Anti-blow-out stem	Valve integrity	Safety
Double D drive on stems	Facilitates correct lever realignment if removed	Ease of assembly
Cavity relief on seats	Over-pressure protection of ball cavity	Safety
Lockable handles option	Prevent accidental operation	Safety
Graphite packing to API 622	Low emission to atmosphere	Safety, performance and reliability
Fire safe design	Conforms to industry codes	Safety

## Pressure vs. Temperature

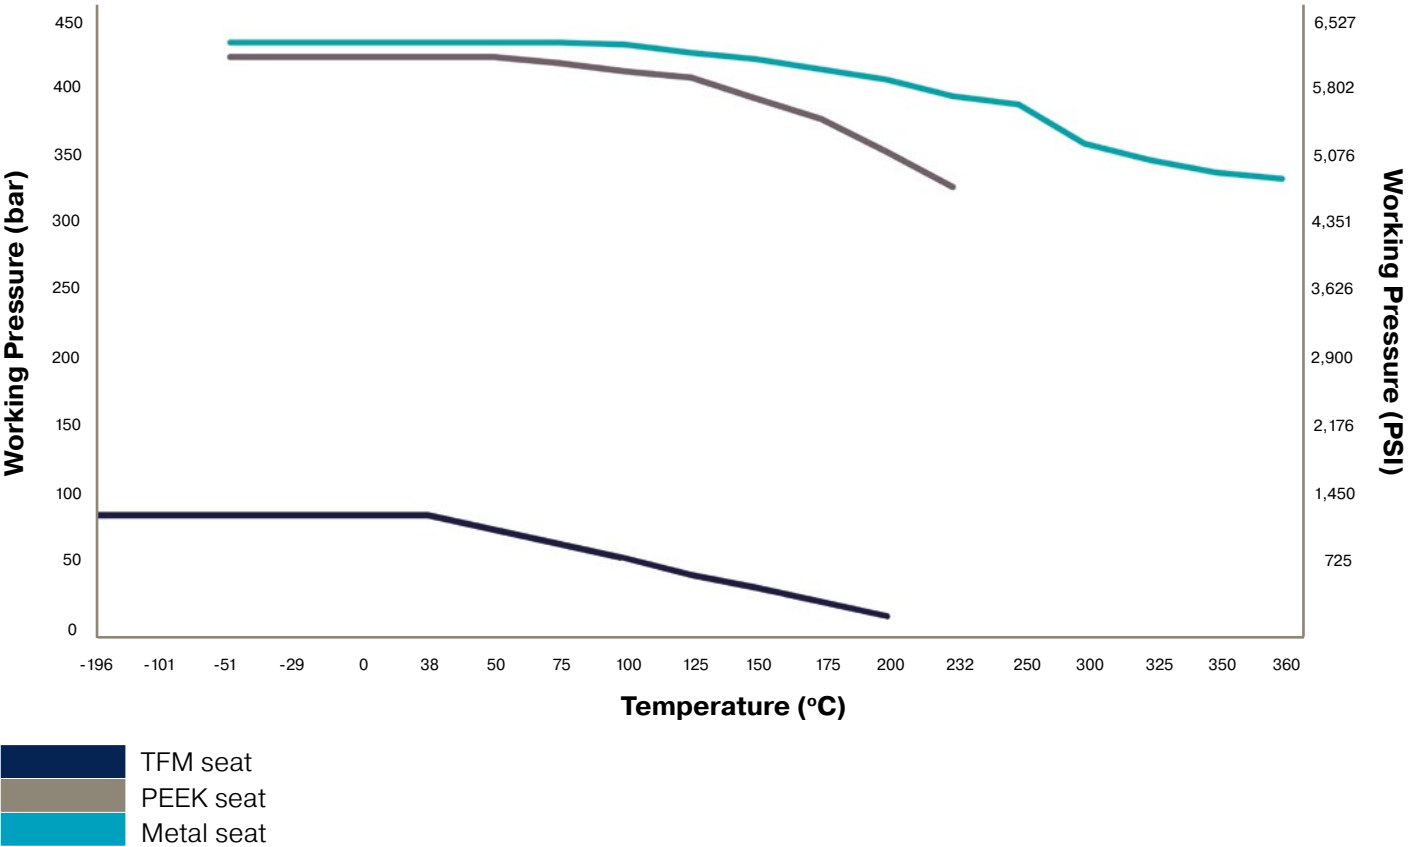

# Pro-Bloc® - Three Piece DBB Valve

## FP Series - Floating Ball

### Ordering Information

FP

Series

Probloc® FP	FP
-------------	----

X

Ball Valve Bore Size

15 mm	X
25 mm	V
38 mm	U
50 mm	T

5

Style



15, 25 mm Bore	Flange x Screw	5
15 - 50 mm Bore	Flange x Flange	6

E

Material

316 Stainless Steel	B
Duplex	E
Super Duplex	F
Low Temp Carbon Steel	H
Alloy 625	M
Alloy 825	L

Arrangement



Block-Bleed-Block  
1st Isolate: Ball  
2nd Isolate: Ball  
Vent: Needle

\*

\* No part number designator required

32T25

Flange Details

	Flange Size		Flange Style		Flange Class	
15 mm Bore	1/2"	8	Raised Face Spiral	F	150	01
	3/4"	12	Ring Type Joint	T	300	03
	1"	16			600	06
	1 1/2"	24			900	09
	2"	32			1500	15
25 mm Bore	1"	16			2500	25
	1 1/2"	24				
	2"	32				
38 mm Bore	1 1/2"	24				
	2"	32				
	3"	48				
50 mm Bore	2"	32				
	3"	48				
	4"	64				

8A

Outlet Connection

15 mm Bore	1/2" Female NPT	*
	12 mm A-LOK®	M12A
	12 mm CPI™	M12Z
	1/2" A-LOK®	8A
	1/2" CPI™	8Z
25 mm Bore	1" Female NPT	*
	25 mm A-LOK®	M25A
	25 mm CPI™	M25Z
	1" A-LOK®	16A
	1" CPI™	16Z

\* No part number designator required

M A3L12 F

Ball Valve Seats

15, 25 mm Bore	Metal	M
38, 50 mm Bore	TFM	T
	PEEK	PB
	Metal	M

Valve Handle Options

Anti-tamper (Needle valve only)	A*
Padlock handle locking	L*
Anti-tamper & Padlock handle locking	A*L*

\* Insert valve number:  
1 - Primary, 2 - Secondary, 3 - Vent, 4 - All.  
Padlocks not supplied.  
Fire Safe needle valve with locking device not available.

Condition

Fire Safe Graphite packing	F
NACE	N
Fire Safe & NACE	FN

### Standard Offering

Arrangement	Block-Bleed-Block
Outlet	<div><div>•</div>1/2" NPT (F) - standard for 15 mm bore<div>•</div>1" Female NPT - standard for 25 mm bore</div>
Vent	1/2" NPT Female
Packing Material (Ball and Needle Valve)	Graphite API 622 standard with Fire safe design

### Notes:

- All non-wetted parts will be supplied in standard stainless steel for corrosion resistant alloys. For carbon steel construction trim materials will be supplied in stainless steel.
- For flange x flange construction when the required flanges are different sizes, specify flange 1 details (flange size, flange style and flange class) followed by flange 2 details (flange size, flange style and flange class). For example: for flange 1 (flange size 1", Raised Face Spiral, Class 900) and flange 2 (flange size 1 1/2", Raised Face Spiral, Class 900) insert 16F0924F09.
- For customer specific options not covered here engineering will allocate a part number at quotation stage.
- Certification requirements and customer specifications MUST be provided at enquiry and order stage.




# Pro-Bloc® - Three Piece DBB Valve

## TP Series - Trunnion Mount

### Overview

Parker’s Pro-Bloc® TP series trunnion mounted valves with a low operating torque are available with either soft or metal seat options for bubble-tight sealing, spanning a wide range of pressures and temperatures.

The valves have double block and bleed function and consist of two separate isolating balls and one vent in a single unit. This three-piece construction offers space and weight saving benefits over the traditional method of using three separate valves in process piping applications. These valves (excluding 15 mm bore) are supplied to the API 6D standard.

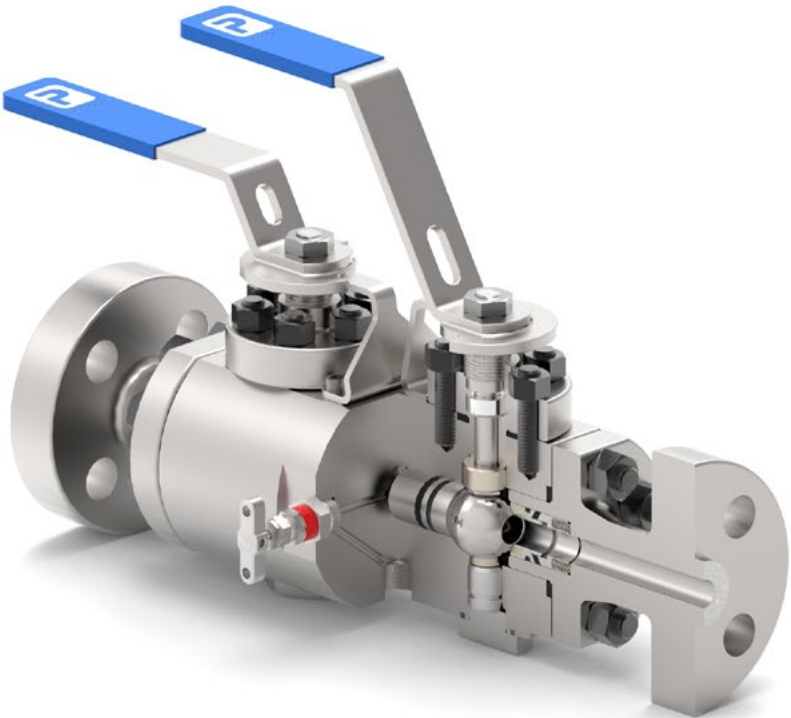

### Markets / Applications:

- Petrochemical
- Low temperature and LNG (tankers, terminals, platforms, plants, air separation)
- Chemical
- Oil and Gas

### Design Standards:

- Design: ASME B16.34, EEMUA 182
- Design pressure: ASME B16.34
- Body wall thickness: ASME B16.34, ASME VIII Div. I
- Fire safe: API 6FA and API 607


### Technical Specifications

Bore sizes	15 mm, 25 mm, 38 mm, 50 mm
Seat materials	TFM, PEEK, Metal
Body materials	316 Stainless Steel ASTM A182-F316/ UNS S31600 Duplex ASTM A182-F51 / UNS S31803 Super Duplex ASTM A182-F53/F55 Low Temp Carbon Steel ASTM A350 LF2 Alloy 625 UNS N06625 Alloy 825 UNS N08825
Valve configurations	Flange x screw Flange x flange
Max. Working Temperature	360° C
Min. Working Temperature	-196° C
Max. Working Pressure	6,250 PSI (431 bar)

### Features, Benefits and Values

Feature	Benefit	Value
Trunnion mount ball	Low operating torque Minimises seat wear and improves performance and service life	Ease of operation Performance and reliability
Three piece design	Suitable for various piping configurations	Flexibility
Anti-blow out stem	Valve integrity	Safety
Double D drive on stems	Facilitates correct lever realignment if removed	Ease of assembly
Cavity relief on seats	Over-pressure protection of ball cavity	Safety
Lockable handles option	Prevents accidental operation	Safety
Graphite packing to API 622	Low emission to atmosphere	Safety, performance and reliability
Fire safe design	Conforms to industry codes	Safety

### Pressure vs. Temperature

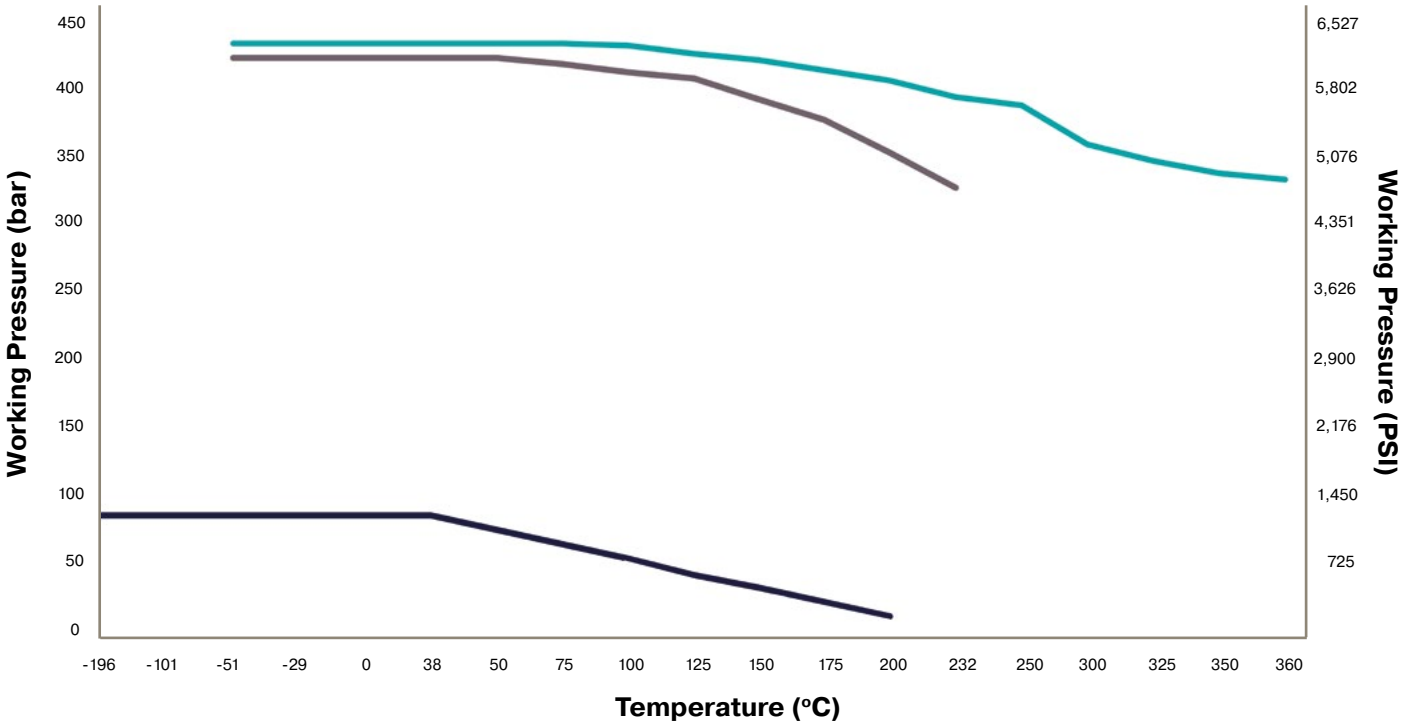

- TFM seat
- PEEK seat
- Metal seat

# Pro-Bloc® - Three Piece DBB Valve

TP Series - Trunnion Mount

## Ordering Information

TP

Series

Probloc® TP	TP
-------------	----

X

Ball Valve Bore Size

15 mm	X
25 mm	V
38 mm	U
50 mm	T

5

Style



15 - 25 mm Bore	Flange x Screw	5
15 - 50 mm Bore	Flange x Flange	6

E

Material

316 Stainless Steel	B
Duplex	E
Super Duplex	F
Low Temp Carbon Steel	H
Alloy 625	M
Alloy 825	L

Arrangement



Block-Bleed-Block  
1st Isolate: Ball  
2nd Isolate: Ball  
Vent: Needle

\*

\* No part number designator required

32T25

Flange Details

	Flange Size		Flange Style		Flange Class	
15 mm Bore	1/2"	8	Raised Face Spiral	F	150	01
	3/4"	12	Ring Type Joint	T	300	03
	1"	16			600	06
	1 1/2"	24			900	09
	2"	32			1500	15
25 mm Bore	1"	16			2500	25
	1 1/2"	24				
	2"	32				
38 mm Bore	1 1/2"	24				
	2"	32				
	3"	48				
50 mm Bore	2"	32				
	3"	48				
	4"	64				

8A

Outlet Connection

1/2" Female NPT	*
12 mm A-LOK®	M12A
12 mm CPI™	M12Z
1/2" A-LOK®	8A
1/2" CPI™	8Z
1" Female NPT	*
25 mm A-LOK®	M25A
25 mm CPI™	M25Z
1" A-LOK®	16A
1" CPI™	16Z

T

Ball Valve Seats

TFM	T
PEEK	PB
Metal	M

A3L12

Condition

Fire Safe Graphite packing	F
NACE	N
Fire Safe & NACE	FN

F

Valve Handle Options

Anti-tamper (Needle valve only)	A*
Padlock handle locking	L*
Anti-tamper & Padlock handle locking	A*L*

\* No part number designator required

\* Insert valve number:  
1 - Primary, 2 - Secondary, 3 - Vent, 4 - All.  
Padlocks not supplied.  
Fire Safe needle valve with locking device not available.

## Standard Offering

Arrangement	Block-Bleed-Block
Outlet	<div><div>•</div>1/2" Female NPT - standard for 15 mm bore</div> <div><div>•</div>1" Female NPT - standard for 25 mm bore</div>
Vent	1/2" NPT Female
Packing Material (Ball and Needle Valve)	Graphite API 622 standard with Fire safe design

## Notes:

- All non-wetted parts will be supplied in standard stainless steel for corrosion resistant alloys. For carbon steel construction trim materials will be supplied in stainless steel.
- For flange x flange construction when the required flanges are different sizes, specify flange 1 details (flange size, flange style and flange class) followed by flange 2 details (flange size, flange style and flange class). For example: for flange 1 (flange size 1", Raised Face Spiral, Class 900) and flange 2 (flange size 1 1/2", Raised Face Spiral, Class 900) insert 16F0924F09.
- For customer specific options not covered here engineering will allocate a part number at quotation stage.
- Certification requirements and customer specifications MUST be provided at enquiry and order stage.

# Pro-Bloc® - Modular Single Piece DBB Valve

## API 6A

### API 6A Standard - Introduction

#### Offshore and Onshore Safety Measures

API valves are lightweight and compact, which is essential for both offshore and onshore installations. They can be easily installed to existing designs and offer low cost fabrication.

One concern on platforms, is the pressure in the voids between the annulus casing strings of a well – any sudden increase or change could indicate leaks in the casing strings or cement bonding.

There is consequently now a growing trend to monitor the pressure in each void, so that operators can gain early warning of impending problems and implement emergency shutdown procedures to avoid disaster.

The need for improved annular casing pressure management is becoming more acute as operators of onshore and offshore oil and gas platforms move into deeper environments and encounter higher reservoir pressures and temperatures – and it is one of the reasons why the UK’s Health and Safety Executive is urging operators to adopt its guidelines for well integrity.

### API 6A Codes and Practises

#### Ball Valve Design Compliance

- Single piece, close to shape forging - API 6A minimum yield material compliance - PSL 3/3G tested
- Hub ended single piece forged body - API 6A minimum yield material compliance - PSL 3/3G tested
- Body and enclosure items NDE tested to API 6A - PSL 3/3G
- Valve assemblies tested to PSL 3/3G with serialization
- Firesafe designed and tested to API 6FA / API 607 at 15,000 psi
- PSL 4 - Material and valve testing compliance upon request. Contact Factory.
- API 6A PR2 Qualification on 15K Ball Valve PAI Seats. -46°C to + 121°C
- Anti-static design

#### Design Codes

- API 6A / ISO 10423 - Allowable stress  $S_m = 2/3 S_y$  where  $S_y$  is the material minimum yield strength
- API 6A / ISO 10423 - (Flange Dimensions)
- ISO 17292
- Firesafe designed and tested to API 6FA / API 607 at 10,000 psi - (10K Ball Valve)
- Firesafe designed and tested to API 6FA at 10,000 psi.

The issue is not just confined to the offshore sector. Energy companies are being forced to drill to greater depths at many onshore exploration sites now that the shallow layers of oil and gas reservoirs have been substantially exploited, which again involves higher operating pressures.

#### Testing

Parker’s double block and bleed valves have been tested for conformance to API 6A specifications by an independent test house, as well as by the internal test laboratory that Parker operates at its European design and manufacturing facility in Barnstaple, UK.

#### Applications


- Christmas tree and wellhead (see illustration on opposite page)
- HIPPS (High Integrity Pressure Protection System) for use in wellhead flowline pressure protection

#### Needle Valve Design Compliance

- Bolted bonnet [enclosures] with anti-blow out stem. API 6A- 60K minimum yield material compliance - PSL 3/3G tested
- Body and enclosure items NDE tested to API 6A - PSL 3/3G
- PTFE - Primary packing with firesafe backup graphite packing
- Firesafe designed and tested to API 6FA at 10,000 psi. Qualified up to 15,000 psi
- PSL 4 - Material and valve testing compliance upon request. Contact Factory.

- Qualified up to 15,000 psi - (Needle Valves)
- Firesafe designed and tested to API 6FA / API 607 at 15,000 psi - (15K Ball Valve)
- ANSI/ASME B1.20.1 (Threads)
- Fugitive Emissions Qualification to ISO 15848- Parts 1 & 2 - Class B. Temperature range -46°C to + 121°C (Ball Valve and Needle Valve)


### Christmas Tree

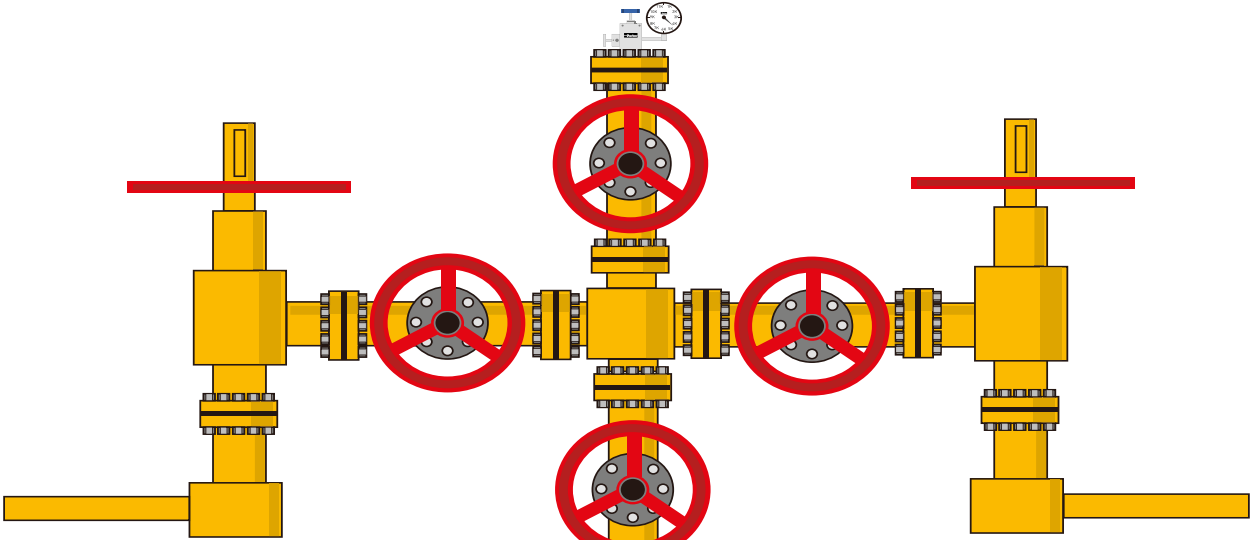

See pages 63 for how to order



### Wellhead

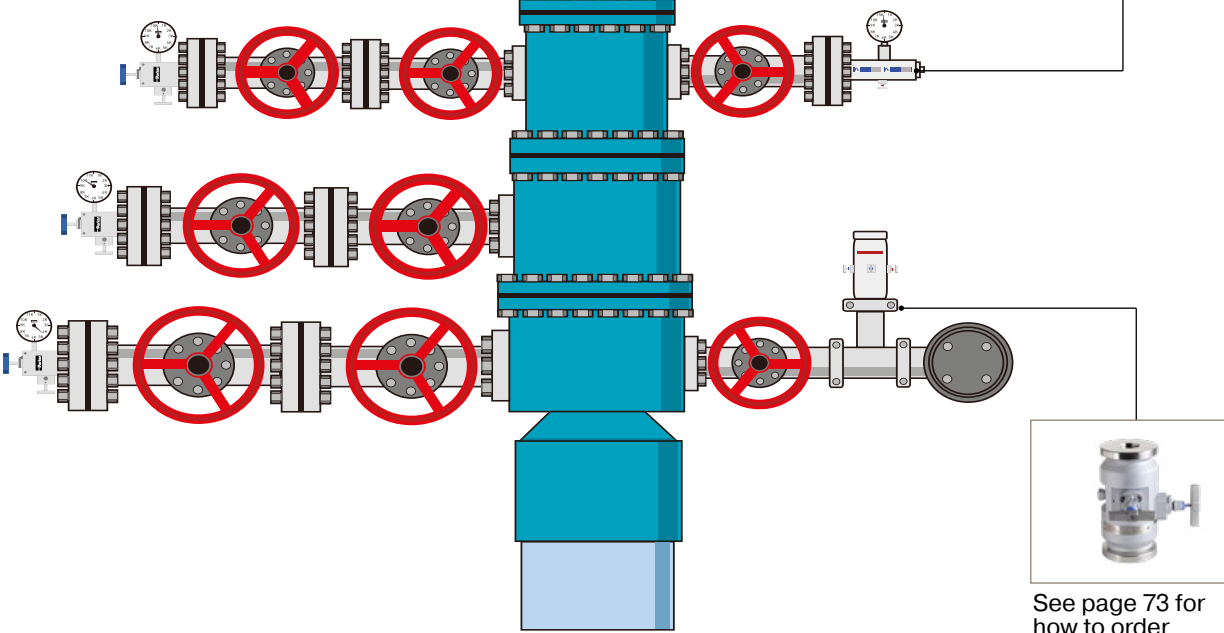

See page 73 for how to order





# Pro-Bloc® - Modular Single Piece DBB Valve

## API 6A

### API 6A Codes and Practises

Parker’s API valves have been designed in partnership with many of the world’s leading energy companies. Pictured here, are just a few of the designs that we have innovated for projects around the world.




### API 6A - Quality control for bodies, bonnets, end and outlet connections PSL 3/3G - Parker Compliance

		API Product Specification Level	Additional Industry Codes
PSL3/3G material testing includes:	Tensile testing	PSL 3/3G	ASTM A370
	Impact testing	PSL 3/3G	ASTM A370
PSL3/3G NDE includes:	Dimensional inspection	To Parker standard	
	Traceability	PSL 3/3G	
	Chemical analysis	PSL 3/3G	ASTM A388
	Volumetric NDE	PSL 3/3G	ASTM E165 / ASTM E709
	Surface NDE	PSL 3/3G	
	Serialization	PSL 3/3G	
Ferritoscope:	On request	To Parker standard	
NORSOK M630 Additional testing includes*:	Corrosion testing		
	Micrographic examination		ASTM G48
	Ferrite counting		ASTM A923
	* (Duplex and Super Duplex materials only)		ASTM E562

### Typical Raw Material Specifications

Material	Product	Industry Codes	NORSOK	NACE	API Product Specification Level
Duplex	Close Shape Flanged Design	ASTM A182 Grade F51	NORSOK M650/ M630	NACE MR0175	PSL3
	Hubbed Design	ASTM A182 Grade F51	NORSOK M650/ M630	NACE MR0175	PSL3
	Trims such as Bonnets, end and outlet connections	ASTM A479/A276 UNS S31803	NORSOK M650/ M630	NACE MR0175	PSL3
Super Duplex	Close Shape Flanged Design	ASTM A182 Grades F53/ F55		NACE MR0175	PSL3
	Hubbed Design	ASTM A182 Grades F53/ F55	NORSOK M650/ M630	NACE MR0175	PSL3
	Trims such as Bonnets, end and outlet connections	ASTM A479/A276 UNS S32750/S32760	NORSOK M650/ M630	NACE MR0175	PSL3
	15K Ball Valve OSY Bridge	ASTM A995 Grade 6A – UNS J93380		NACE MR0175	PSL3
Alloy 725	Close Shape Flanged Design	ASTM B637 Grade UNS N07725		NACE MR0175	PSL3
Alloy 625	Close Shape Flanged Design	ASTM B564 Grade UNS N06625		NACE MR0175	PSL3
	Hubbed Design	ASTM B564 Grade UNS N06625		NACE MR0175	PSL3
	Trims such as Bonnets, end and outlet connections	ASTM B446 Grade UNS N06625		NACE MR0175	PSL3
Alloy 718	Trims such as Bonnets, end and outlet connections	API 6A UNS N07718		NACE MR0175	PSL3

### Pressure / Temperature Chart

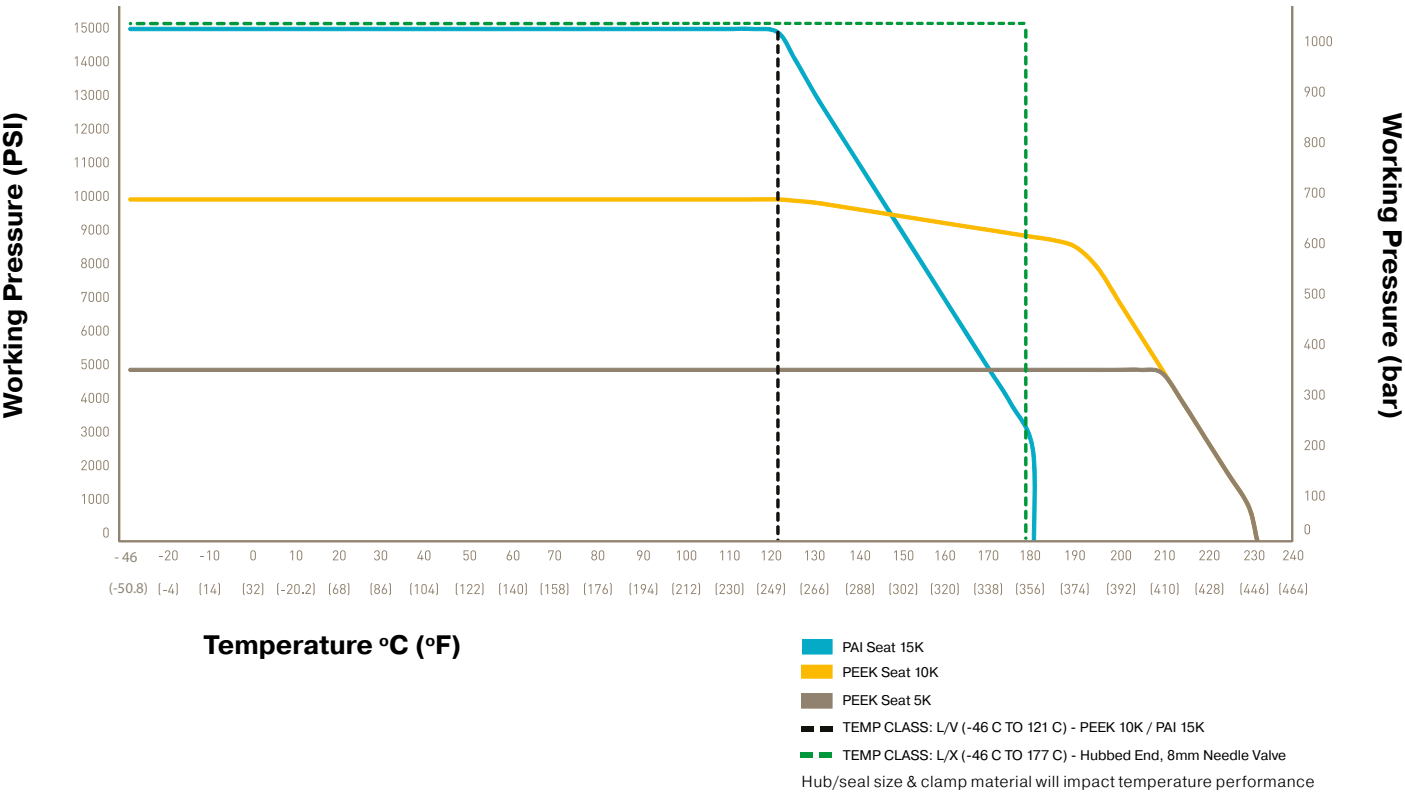

# Pro-Bloc® - Modular Single Piece DBB Valve

## API 6A

5K and 10K - API 6A


### Overview

Parker's uni directional quarter turn ball valve anti-static design is based on the Hi-Pro® ball valves series which has been used in the field on many services over a twenty-year time span. Just like the Hi-Pro®, the API 6A design incorporates slotted seats. This gives inherent cavity relief preventing over pressure occurring within the ball/seat cavity when the valve is in the closed position. The stem itself is a blow-out proof design. The valves are a straight through bore that helps to prevent “plugging” of the bore.



### Technical Specifications

Bore sizes	10 mm
Seat materials	PEEK
Body materials	Duplex A182-F51 Super Duplex ASTM A182-F53/F55 Alloy 725/625
Max. Working Temperature	232° C (450° F)
Min. Working Temperature	-46° C (-51° F)
Max. Working Pressure	5K PSI (345 bar), 10K PSI (690 bar)

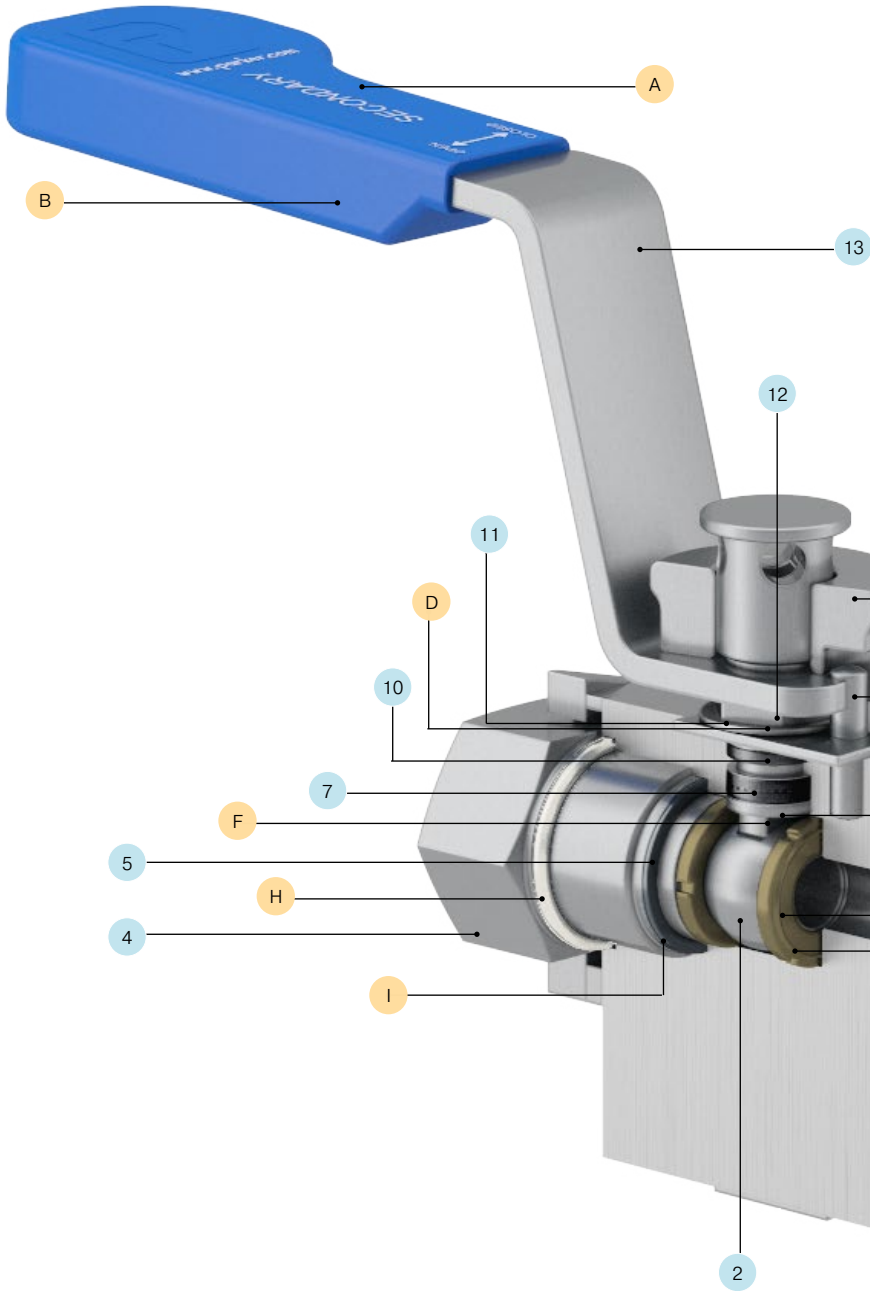

### Bill of Materials

Reference	Description	Duplex	Super Duplex	Alloy 625	PSL 3/3G
1	Body (Hub)	A182-F51	A182-F53/F55	ASTM B564 Gr. N06625	YES
1	Body (Flange)	A182-F51	A182-F53/F55	Alloy 725 - ASTM B637 Gr. N07725 with 625 Trim	YES
2	Ball	A479-UNS S31803	A479-UNS S32750/S32760	ASTM B446 Gr. N06625	YES
3	Seats	PEEK	PEEK	PEEK	
4	End Adaptor	A479-UNS S31803	A479-UNS S32750/S32760	ASTM B446 Gr. N06625	YES
5	Joint Seal	6mo	ASTM B446 Gr. N06625	ASTM B446 Gr. N06625	
6	Stem	A479-UNS S31803	A479-UNS S32750/S32760	ASTM B446 Gr. N06625	YES
7	Packing	Graphite	Graphite	Graphite	
8	Ant-torque plate	316 St.Stl	316 St.Stl	316 St.Stl	
9	Stop Pin	316 St.Stl	316 St.Stl	316 St.Stl	
10	Thrust Bush	316 St.Stl	316 St.Stl	316 St.Stl	
11	Spring Washer	X12CrNi17 7 (DIN 1.4310)	X12CrNi17 7 (DIN 1.4310)	X12CrNi17 7 (DIN 1.4310)	
12	Spindle Nuts	A4. St.Stl	A4. St.Stl	A4. St.Stl	
13	Handle	316 St.Stl	316 St.Stl	316 St.Stl	

Note: NPT & Autoclave plugs/glands are not PSL3 tested as standard.

### Features, Benefits and Values

Reference	Feature	Benefit	Value
A	Identification of primary and secondary valves	Removes possibility of operating error	Safety
B	Ergonomic vinyl sleeve	Easy to grip	Ease of operation
C	Handle locking mechanism	Enables the valve to be locked in either the open or closed position	Safety
D	EEMUA 182 Locking Nut	Ensures packing integrity if handle needs to be removed	Performance and reliability
E	Torque plate	Reduces operational torque on packing	Ease of operation
F	Anti blow out stem	Prevents stem blow out	Safety
G	Slotted seats	Inherent cavity relief	Safety
H	Environmental seal	Preventing aggressive dirt and moisture	Performance and reliability
I	Primary metallic atmospheric seal	No elastomers, therefore no seal deterioration	Performance and reliability





# Pro-Bloc® - Modular Single Piece DBB Valve API 6A

Ordering Information - 5K and 10K

APB

Series

API Pro-Bloc

APB

Y

Style

Flange x Screw

1

Flange x Flange

2

1

Ball Valve Bore Size

10 mm

Y

00

Arrangement

Block Bleed Block

1st Isolate: Ball

Vent: Needle

2nd Isolate: Ball

00

Block and Bleed

1st Isolate: Ball

Vent: Needle

30

E33T10K

Process / Instrument Connection

Material	Flange Size	Face Style	Flange Class			
Duplex	2 - 1/16"	Ring Type Joint	5,000 PSI (6B)	5K		
	1 - 13/16"				10,000 PSI (6BX)	10K
	2 - 1/16"					
	2 - 9/16"					
Super Duplex	2 - 1/16"		5,000 PSI (6B)	5K		
	1 - 13/16"				10,000 PSI (6BX)	10K
	2 - 1/16"					
	2 - 9/16"					
725/625	2 - 1/16"	5,000 PSI (6B)	5K			
	1 - 13/16"			10,000 PSI (6BX)	10K	
	2 - 1/16"					
	2 - 9/16"					

9C

Outlet / Vent Connection

1/2" FNPT

-

9/16" MP Autoclave

9C

3/8" MP Autoclave

6C

L

Valve Handle Options

Padlock Handle Locking

Primary and Secondary Ball Valve

L

FN

Condition

Fire Safe

F

NACE

N

Fire Safe & NACE

FN

Notes:

- PEEK seat as standard
- If 1/2" Female NPT outlet is selected then vent connection is 1/2" Female NPT only. No connection designator required



# Live Loaded Pro-Bloc® - Modular Single Piece DBB Valve - API 6A


5K, 10K and 15K - API 6A

## Overview

In addition to the features mentioned for the 5K and 10K ball valve design, the stem packing is live loaded graphite. The live loading maintains a constant pressure on the stem packing compensating for any potential wear during the valve's lifetime. In turn it also improves the efficiency of the sealing capabilities. These valves have passed extensive third party testing to gain ISO 15848-1 certification.

## Tru-Loc® Mechanical Sealed End Connection

Designed specifically for Pro-Bloc® end connection security. Extensive tests have proved that end connections locked with the Tru-Loc® end connector locking mechanism give 100% security and prevent end connector movement when disconnecting instruments or connectors. This ensures that the ball seat is securely positioned at all times.

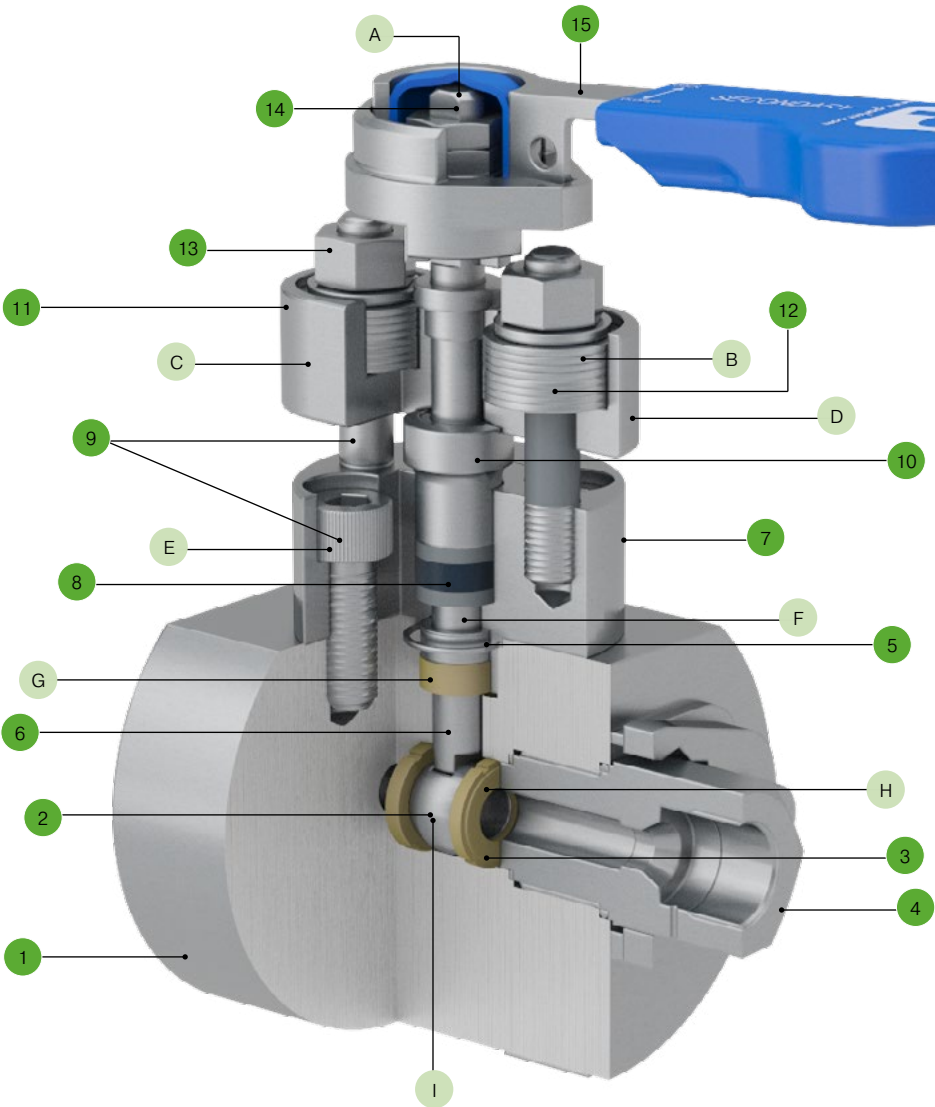

## Technical Specifications

Bore sizes	10 mm
Seat materials	PAI
Body materials	Duplex A182-F51 Super Duplex ASTM A182-F53/F55 Alloy 625
Max. Working Temperature	180°C (356 °F)
Min. Working Temperature	-46°C (-51°F)
Max. Working Pressure	15K PSI (1034 bar)

## Bill of Materials

Reference	Description	Duplex	Super Duplex	625/725	PSL 3/3G
1	Body (Hub)	A182-F51	A182-F53/F55	ASTM B564 Gr. N06625	YES
1	Body (Flange)	A182-F51	A182-F53/F55	Alloy 725 - ASTM B637 Gr. N07725 with 625 Trim	YES
2	Ball	A479-UNS S32750/S32760	A479-UNS S32750/S32760	Alloy 718 API	YES
3	Seats	PAI	PAI	PAI	
4	End Adaptor	A479-UNS S31803	A479-UNS S32750/S32760	ASTM B446 Gr. N06625	YES
5	Joint Seal	6mo	Alloy 625	Alloy 625	
6	Stem	A479-UNS S32750/S32760	A479-UNS S32750/S32760	Alloy 718 API	YES
7	Bonnet	A479-UNS S31803	A479-UNS S32750/S32760	ASTM B446 Gr. N06625	YES
8	Packing	Graphite	Graphite	Graphite	
9	Studs	ASTM A453 GR.660D	ASTM A453 GR.660D	ASTM A453 GR.660D	
10	Thrust Bush	A479-UNS S31803	A479-UNS S32750/S32760	ASTM B446 Gr. N06625	
11	OSY Bridge	Super Duplex ASTM A995 Gr. 6A	Super Duplex ASTM A995 Gr. 6A	Super Duplex ASTM A995 Gr. 6A	
12	Spring Washer	X12CrNi17 7 (DIN 1.4310)	X12CrNi17 7 (DIN 1.4310)	X12CrNi17 7 (DIN 1.4310)	
13	OSY Nuts	ASTM A453 GR.660D	ASTM A453 GR.660D	ASTM A453 GR.660D	
14	Spindle Nuts	A4. St.Stl	A4. St.Stl	A4. St.Stl	
15	Handle	316 St.Stl	316 St.Stl	316 St.Stl	

Note: NPT & Autoclave plugs/glands are not PSL3 tested as standard.

## Features, Benefits and Values


Reference	Feature	Benefit	Value
A	Handle locking mechanism	Enables the valve to be locked in either the open or closed position	Safety
B	Bevel washers (coned disk spring) for live loading of packing	Compensates for wear of the packing, preventing stem leakage (FE Class B)	Safety, performance and reliability
C	Yoke (bridge) is manufactured from Super Duplex casting as standard	API 6A material compliant	Safety
D	Proprietary high pressure graphite packing with corrosion inhibitor	Fire safe	Safety
E	Bolted bonnet	Removes mechanical hold threads from the process media	Performance and reliability
F	Anti blow out stem	Prevents stem blow out	Safety
G	Primary metallic atmospheric seal	No elastomers, therefore no seal deterioration	Performance and reliability
H	Slotted seats	Provides equalization of cavity pressure	Performance and reliability
I	Vented ball	Ensures body cavity relief is achieved	Safety

# Live Loaded Pro-Bloc® - Modular Single Piece DBB Valve - API 6A

5K, 10K and 15K - API 6A

The Parker heavy duty needle valve has been extensively used both offshore and onshore, including sour gas fields. The two piece stem ensures the tip does not rotate on closure ensuring a gas tight shut off with no opportunity for seat damage or galling. The packing itself is below the stem threads protecting them from the media and ensuring the thread lubricant is not “washed out”.

The stem packing is a combination of PTFE and high purity graphite which is live loaded to reduce the need for packing adjustment. A protective cap is secured above the threads to prevent ingress of moisture or dirt. The valve has a bolted bonnet construction which is stronger, safer and more reliable than a screwed bonnet design. The sealing between bonnet and head unit is a metal seal for increased durability and increased operating life. The handle is held firmly into the top of the stem with an anti-vibration design to prevent the handle becoming loose in operation.

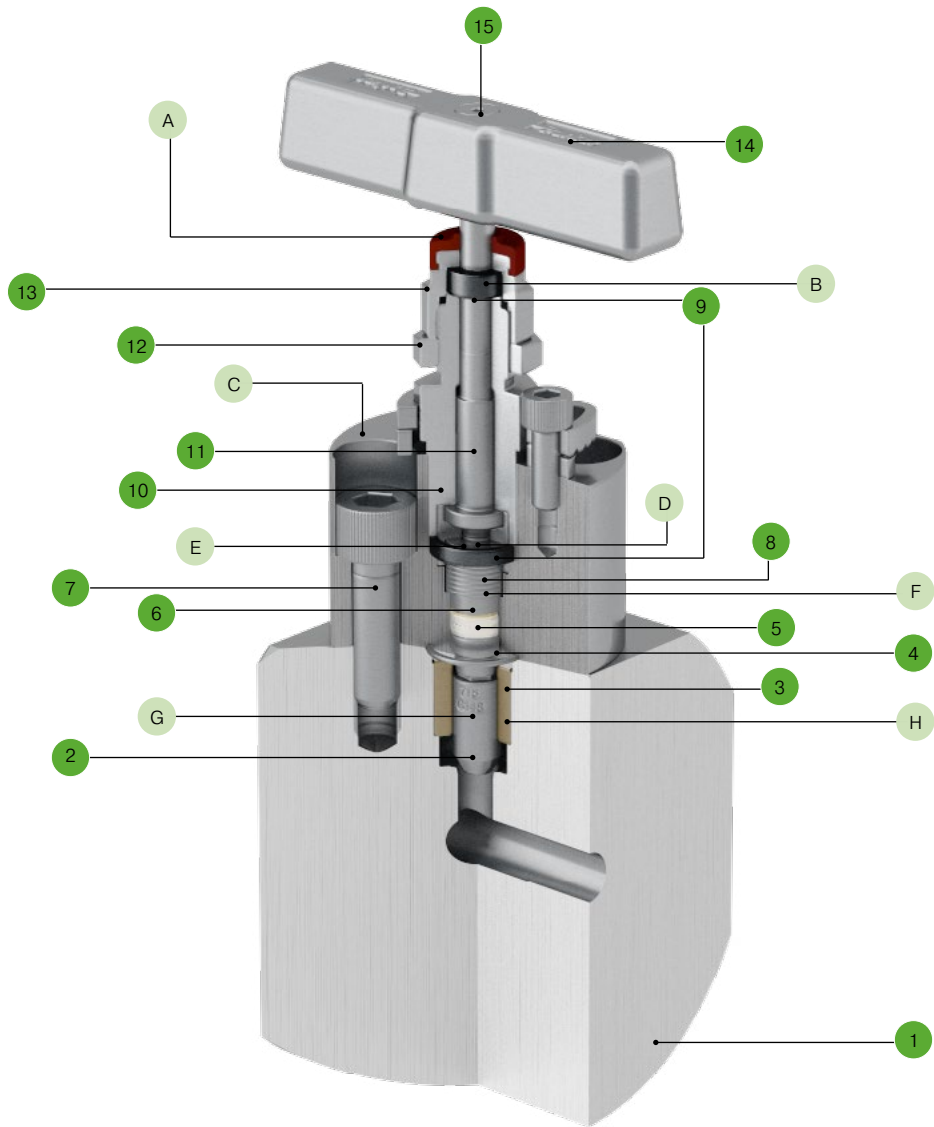

## Bill of Materials

Reference	Description	Duplex	Super Duplex	625	PSL 3/3G
1	Body (Hub)	A182-F51	A182-F53/F55	ASTM B564 Gr. N06625	YES
1	Body (Flange)	A182-F51	A182-F53/F55	Alloy 725 - ASTM B637 Gr. N07725 with 625 Trim	YES
2	Lower Stem	A479-UNS S32750/S32760	ASTM B446 Gr. N06625	Alloy 718 API	YES
3	Stem Guide	PEEK	PEEK	PEEK	
4	Joint Seal	6mo	ASTM B446 Gr. N06625	ASTM B446 Gr. N06625	
5	Packing	P.T.F.E	P.T.F.E	P.T.F.E	
6	Thrust Bush	A479-UNS S31803	A479-UNS S32750/S32760	ASTM B446 Gr. N06625	
7	Bonnet Studs	ASTM A453 GR.660D	ASTM A453 GR.660D	ASTM A453 GR.660D	
8	Spring Washer	X12CrNi17 7 (DIN 1.4310)	X12CrNi17 7 (DIN 1.4310)	X12CrNi17 7 (DIN 1.4310)	
9	Firesafe Packing	Graphite	Graphite	Graphite	
10	Gland Adjuster	A479-UNS S31803	A479-UNS S32750/S32760	ASTM B446 Gr. N06625	YES
11	Upper Stem	A479-UNS S31803	A479-UNS S32750/S32760	ASTM B446 Gr. N06625	YES
12	Bolted Bonnet	A479-UNS S31803	A479-UNS S32750/S32760	ASTM B446 Gr. N06625	YES
13	Firesafe Gland	A479-UNS S31803	A479-UNS S32750/S32760	ASTM B446 Gr. N06625	YES
14	Handle	316 St.Stl	316 St.Stl	316 St.Stl	
15	Handle Screw	316 St.Stl	316 St.Stl	316 St.Stl	

Notes:

- NPT & Autoclave plugs/glands are not PSL3 tested as standard.
- When API 6A Integral flange is selected, body material changes to Alloy 725 [ASTM B637 Gr. N07725] with 625 Trim.

## Features, Benefits and Values

Reference	Feature	Benefit	Value
A	Protective cap	Secured above the threads to prevent ingress of moisture or dirt	Durability
B	Fire safe / environmental seal	Fire safe	Safety
C	Bolted bonnet	Removes mechanical hold threads from the process media	Performance and reliability
D	Anti blow out stem	Prevents stem blow out	Safety
E	Two piece stem	Lower stem non rotational for increased cycle life and improved seal ability, preventing damage to seat	Safety, performance and reliability
F	Bevel washers (coned disk spring) for live loading of packing	Compensates for wear of the packing, preventing stem leakage and compensates for temperature cycling	Performance and reliability
G	PEEK guide bush	Aides with centering of tip	Performance
H	Primary metallic atmospheric seal	No elastomers, therefore no seal deterioration	Performance and reliability

# Live Loaded Pro-Bloc® - Modular Single Piece DBB Valve - API 6A

Ordering Information - 5K, 10K and 15K

APBL

Y

1

00

F29T15K

9C

L

FN

B

Series

API Pro-Bloc

APBL

Style

Flange x Screw

1

Flange x Flange

2

Arrangement

Block Bleed Block

1st Isolate: Ball

Vent: Needle

2nd Isolate: Ball

00

Block and Bleed

1st Isolate: Ball

Vent: Needle

30

Ball Valve Bore Size

10 mm

Y

Outlet / Vent Connection

1/2" Female NPT <sup>1</sup>

\*

9/16" MP Autoclave

9C

3/8" MP Autoclave

6C

Valve Handle Options

Padlock Handle Locking

Primary and Secondary Ball Valve

L

Condition

Fire Safe

F

NACE

N

Fire Safe & NACE

FN

Condition 2

FE Class B

B

Process / Instrument Connection

Material

Flange Size

Face Style

Flange Class

5,000 PSI

Duplex

E

2 - 1/16"

33

Ring Type Joint

T

5,000 PSI (6B)

5K

10,000 PSI

Duplex

E

1 - 13/16"

29

2 - 1/16"

33

2 - 9/16"

41

Super Duplex

F

1 - 13/16"

29

2 - 1/16"

33

2 - 9/16"

41

725/625

Q

1 - 13/16"

29

2 - 1/16"

33

2 - 9/16"

41

Ring Type Joint

T

10,000 PSI (6BX)

10K

15,000 PSI

Super Duplex

F

1 - 13/16"

29

2 - 1/16"

33

725/625

Q

1 - 13/16"

29

2 - 1/16"

33

Ring Type Joint

T



15,000 PSI (6BX)

15K

Note: if FE is not required B is not necessary, the valve design remains the same, no FE production testing will be conducted.

Notes:

- PAI seat as standard
- If 1/2" Female NPT outlet is selected then vent connection is 1/2"Female NPT only. No connection designator required

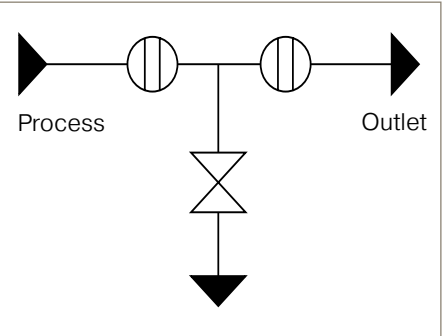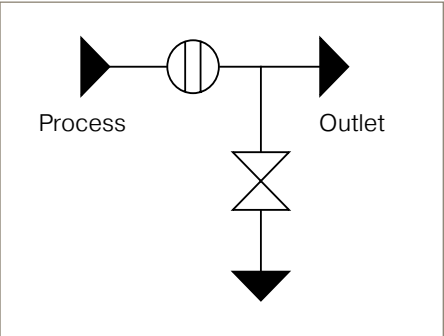

# Pro-Bloc® - API 6A Grayloc® Hub Connection

Ball - Needle Design

Ordering Information - 10K

APB

Y

1

00

E24G11

10K

9C

L

FN

Series

API Pro-Bloc

APB

Ball Valve Bore Size

10 mm

Y

Arrangement

Block Bleed Block

1st Isolate: Ball

Vent: Needle

2nd Isolate: Ball

00

Block and Bleed<sup>1</sup>

1st Isolate: Ball

Vent: Needle

30

Pressure Rating

10K PSI

10K

Outlet / Vent Connection<sup>2</sup>

1/2" Female NPT

-

9/16" MP Autoclave

9C

3/8" MP Autoclave

6C

Condition

Fire Safe

F

NACE

N

Fire Safe & NACE

FN

Valve Handle Options

Padlock Handle Locking

Primary and Secondary Ball Valve

L

Process / Instrument Connection<sup>(1)</sup>

Material

Hub Size

\*Clamp & Bolt Material

AISI 4140 Clamp & A320-L7 Bolting

Duplex

E

1 - 1/2"

24

1 - 1/2"

24

2"

32

2"

32

2"

32

2"

32

2"

32

Hub

G

Seal 11

11

Seal 14

14

Seal 11

11

Seal 13

13

Seal 14

14

Seal 16

16

Seal 14

14

Heavy Duty Hub

B

Seal 14

14

AISI 4140 Clamp & A320-L7 Bolting

Super Duplex

F

1 - 1/2"

24

1 - 1/2"

24

2"

32

2"

32

2"

32

2"

32

2"

32

Hub

G

Seal 11

11

Seal 14

14

Seal 11

11

Seal 13

13

Seal 14

14

Seal 16

16

Seal 20

20

Seal 14

14

Heavy Duty Hub

B

Seal 14

14

A182-F304 Clamp & A320-B8 Bolting

625

M

1 - 1/2"

24

2"

32

2"

32

2"

32

Hub

G

Seal 11

11

Seal 11

11

Seal 13

13

Seal 14

14

Heavy Duty Hub



B

Seal 14

14

Notes:

- If 1/2" Female NPT outlet is selected then vent connection is 1/2"Female NPT only. No connection designator required.
- Hub/Seal size selection shown is based on the overall combined pressure capability of base material with the clamp and bolt materials as listed.
- Hub ended valves are NOT supplied with seals, clamps and bolts as standard.

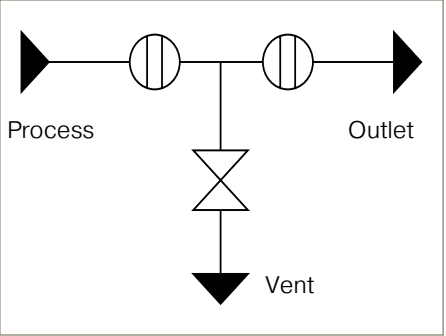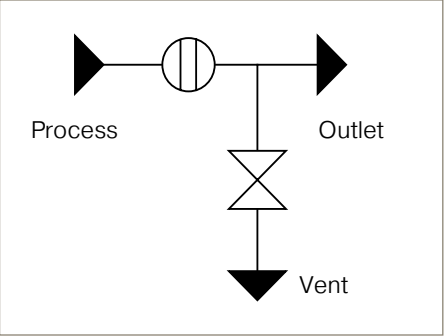



# Live Loaded Pro-Bloc® - API 6A

## Grayloc® Hub Connection

Ball - Needle Design

### Ordering Information - 10K and 15K

APB

Series

API Pro-Bloc

APB

Y

Ball Valve Bore Size

10 mm

Y

1

Style

Hub x Screw

1

Hub x Hub

2

00

Arrangement

Block Bleed Block

1st Isolate: Ball

Vent: Needle

2nd Isolate: Ball

00

Block and Bleed

1st Isolate: Ball

Vent: Needle

30

E24G1110K

9C

Outlet / Vent Connection<sup>1</sup>

1/2" Female NPT <sup>2</sup>

\*

9/16" MP Autoclave

9C

3/8" MP Autoclave

6C

L

Valve Handle Options

Padlock Handle Locking

Primary and Secondary Ball Valve

L

FN

Condition

Fire Safe

F

NACE

N

Fire Safe & NACE

FN

B

Condition 2


FE Class B

B

Note, if FE is not required B is not necessary, the valve design remains the same, no FE production testing will be conducted.

1. The vent connection is supplied with a plug.  
2. 10K valves only.

- Notes:
- If 1/2" Female NPT outlet is selected then vent connection is 1/2"Female NPT only. No connection designator required.
  - Hub/Seal size selection shown is based on the overall combined pressure capability of base material with the clamp and bolt materials as listed
  - Hub ended valves are NOT supplied with seals, clamps and bolts as standard

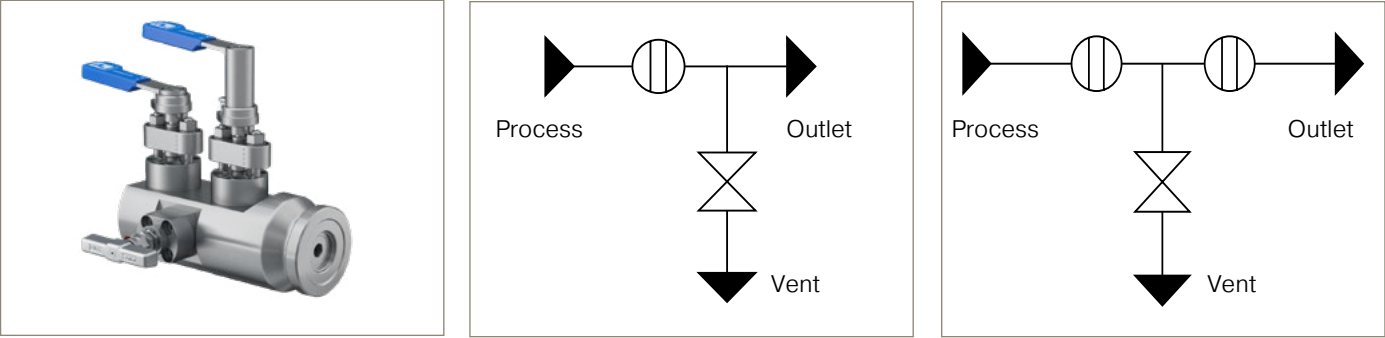

# Live Loaded Pro-Bloc® API 6A - Grayloc® Hub Connection

Needle Design

Ordering Information - 10K and 15K

APB		2		N3		F32B14							
Series		Style <sup>1</sup>		Arrangement									
API Pro-Bloc		APB		Block Bleed Block 1st Isolate: Needle Vent: Needle 2nd Isolate: Needle		N3							
		Hub x Hub		Block and Bleed 1st Isolate: Needle Vent: Needle		N2							
1. The hub x hub outlet end will also include a female 9/16" MP Autoclave Connection													
Process / Instrument Connection													
*Clamp & Bolt Material		Material		Hub Size						Pressure Rating			
10,000 PSI													
AISI 4140 Clamp & A320-L7 Bolting	Duplex	E	1 - 1/2"	24	Hub	G	Seal 11	11	10,000 PSI	10K			
			1 - 1/2"	24			Seal 14	14					
			2"	32			Seal 11	11					
			2"	32			Seal 13	13					
			2"	32			Seal 14	14					
			2"	32			Seal 16	16					
			2"	32	Seal 14	14							
AISI 4140 Clamp & A320-L7 Bolting	Super Duplex	F	1 - 1/2"	24	Hub	G	Seal 11	11					
			1 - 1/2"	24			Seal 14	14					
			2"	32			Seal 11	11					
			2"	32			Seal 13	13					
			2"	32			Seal 14	14					
			2"	32			Seal 16	16					
			2"	32	Seal 20	20							
A182-F304 Clamp & A320-B8 Bolting	625	M	1 - 1/2"	24	Hub	G	Seal 14	14					
			2"	32			Seal 11	11					
			2"	32			Seal 11	11					
			2"	32	Heavy Duty Hub	B	Seal 13	13					
15,000 PSI													
AISI 4140 Clamp & A320-L7 Bolting	Duplex	E	1 - 1/2"	24	Hub	G	Seal 11	11	15,000 PSI	15K			
			2"	32			Seal 11	11					
			2"	32			Seal 13	13					
			2"	32			Seal 14	14					
			2"	32	Heavy Duty Hub	B	Seal 14	14					
AISI 4140 Clamp & A320-L7 Bolting	Super Duplex	F	1 - 1/2"	24	Hub	G	Seal 11	11					
			2"	32			Seal 11	11					
			2"	32			Seal 13	13					
			2"	32			Seal 14	14					
			2"	32	Seal 16	16							
A182-F304 Clamp & A320-B8 Bolting	625	M	1 - 1/2"	24	Hub	G	Seal 14	14					
			2"	32			Seal 11	11					
			2"	32	Heavy Duty Hub	B	Seal 11	11					

9C

Outlet / Vent Connection<sup>1</sup>

1/2" Female NPT <sup>2</sup>	*
9/16" MP Autoclave	9C
3/8" MP Autoclave	6C

FN

Condition

Fire Safe	F
NACE	N
Fire Safe & NACE	FN

B

Condition 2


FE Class B	B
------------	---

Note, if FE is not required B is not necessary, the valve design remains the same, no FE production testing will be conducted.

1. The vent connection is supplied with a plug.

2. 10K valves only.

- Notes:
- If 1/2" Female NPT outlet is selected then vent connection is 1/2"Female NPT only. No connection designator required.
  - Needle Valve bore size 8mm
  - Hub/Seal size selection shown is based on the overall combined pressure capability of base material with the clamp and bolt materials as listed
- \* Hub ended valves are NOT supplied with seals, clamps and bolts as standard

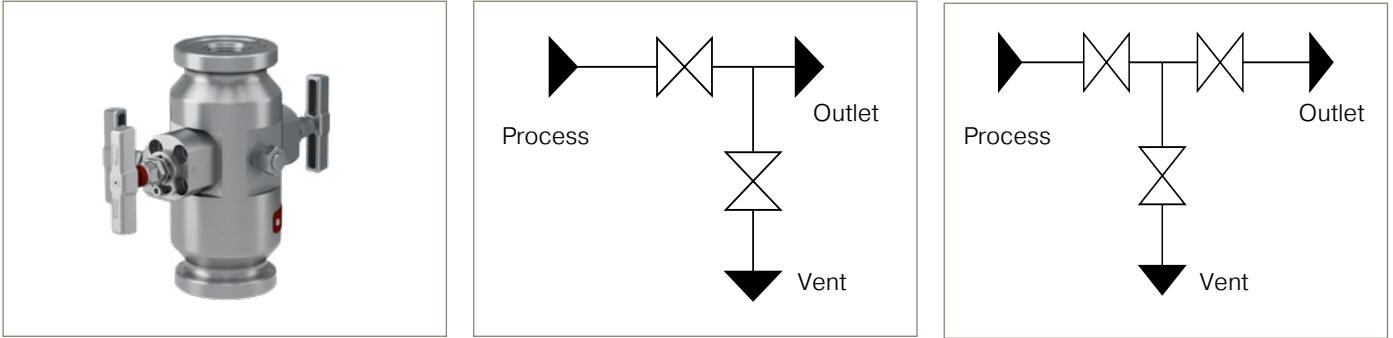

# Complementary Products for Complete Installation Solutions

## Flushing Rings (Spools)

Flushing Rings, historically referred to as drip rings are used between an isolation valve and the diaphragm seal of a pressure transmitter. Side ports on the rings allow media to be injected/ejected so that the diaphragm seal can be flushed free of deposits that affect transmitter measurement accuracy. Parker offers a bespoke range of flushing rings in number of different styles and configurations. Historically, drip rings are secured between the two raised faces only and held in position by the force exerted through the bolts. The Parker Flushing Ring solution is held in place by the through bolting, this allows for ease of installation and give positive locating. Options with this range of flushing rings include captive studs. This gives the added benefit of the flushing ring staying in place if either the process valve side or diaphragm side require removal. For full details see Data Sheet ref. 4190-FR.

## ProSpool

The Parker ProSpool feature a combined, single-piece valve consisting of a double block and bleed configuration with an integral flushing spool. It can be easily installed and, having fewer component parts, reduces inventory and purchase orders. With the captive stud option torquing of the nuts is simplified. Extremely useful in restricted spaces. For full details see Data Sheet ref. 4190-PSV.

## Ball Valves and Manifolds Hi-Pro Series

These high performance bi-directional Ball Valves & Manifolds offer the user full cold working pressure ratings up to 10,000 psi (689 bar), giving 100% bubble tight shut off and continuous repeatable performance. These products are suitable for the most demanding applications in the oil, gas and process control industries. All valves also meet the requirements of ANSI B31.1 for use in power plants. The design reduces potential body leakage paths to a minimum. With the added opportunity to select Parker Superior Advantage integral compression ends the user can eliminate the use of taper threads and thread sealant, thus avoiding system contamination, reducing leakage paths, installation costs, weight and space. For full details see Catalogues ref. 4190-HBV and 4190-HBM.

## Air Header Distribution Manifolds - LPAHM Series

These air header distribution manifolds are designed to distribute air from the compressor to the actuators on pneumatic instruments, such as steam flow meters, pressure controllers and valve positioners. They are widely used in industrial chemical processing, plastic processing and energy industries and are approved for low pressure applications up to 275 psi. Manufactured from AISI 316 Stainless Steel material, the air header distribution manifolds offer complete customer system compatibility that reduces installation time and potential leak paths. The coded welded construction with non-destructive tested design minimises the number of potential leak paths, rather than fabricating with instrumentation connections with tubing, therefore reducing labour costs. These manifolds are designed for use with air only and are supplied with a number of lockable ball valves on opposite sides, right side or left side only to prevent unauthorized access. For full details see Catalogue ref. 4190-DM.



## Air Header Distribution Manifolds - HPAHM Series

These distribution manifolds are designed for applications that use liquid or gas, low temperature steam and hydraulic actuation. The pressure rating of these manifolds is dictated by the inlet/outlet Flange Class or the thread connection. These distribution manifolds feature an ergonomic vinyl sleeve on the valve handle to provide positive grip and to ensure ease of operation. Each nut has an innovative domed design, which prevents ingress of moisture and contamination of the thread, therefore preventing corrosion. They feature a part-welded construction, with all welds carried out by coded welders, providing assurance of their robustness and performance. These manifolds are NDT (Non-Destructive Testing) applied, giving the customer greater assurance.

For full details see Catalogue ref. 4190-DM.



## Hi-Pro Modular Distribution Manifold

Unique to Parker, these manifolds are the ideal choice when ultimate flexibility is required within a distribution manifold. They are approved to operate at pressures up to 6,000 psi and are used extensively in the oil, gas, chemical and petrochemical industries to provide safety and performance. These innovative Hi-Pro modular distribution manifolds can be easily arranged in a layout to suit a wide range of different applications to distribute liquid or gas. They use standard components, therefore making it more affordable for the customer. The Hi-Pro modular distribution manifolds feature an ergonomic vinyl sleeve on the valve handle to provide positive grip and to ensure ease of operation. Each nut is domed in shape, which prevents ingress of moisture and contamination of the thread, which could cause corrosion. This manifold is available with up to 20 valves (even numbers only - spare valves can be blanked off). Temperature range is up to 232°C with PEEK seats.

For full details see Catalogue ref. 4190-DM.



## Lapped Joint Tube Adaptor

Available in the full range of fitting materials and sizes up to 1/2" (M12) as standard, these lapped joint tube adaptors are suitable for applications involving small flanged process valves and offer a simple, safe and effective conversion to instrument lines.



## Flange Connector - Flange to Parker Tube Fittings

Offered in a range of materials and with either A-LOK® or CPI™ tube fitting technology, these flange connectors deliver huge flexibility in terms of offering. Tube connections up to 1" (25mm), flange connections up to 2" NB and pressures to ANSI Class 2500 (6,000 PSI Nom.). The one-piece integral connection adaptors allow the safe, easy and efficient transition from process to instrumentation in just one step.





## Offer of Sale

The items described in this document and other documents and descriptions provided by Parker Hannifin Corporation, its subsidiaries and its authorized distributors (“Seller”) are hereby offered for sale at prices to be established by Seller. This offer and its acceptance by any customer (“Buyer”) shall be governed by all of the following Terms and Conditions. Buyer’s order for any item described in its document, when communicated to Seller verbally, or in writing, shall constitute acceptance of this offer. All goods or work described will be referred to as “Products”.

**1. Terms and Conditions.** Seller’s willingness to offer Products, or accept an order for Products, to or from Buyer is expressly conditioned on Buyer’s assent to these Terms and Conditions and to the terms and conditions found on-line at [www.parker.com/saleterms/](http://www.parker.com/saleterms/). Seller objects to any contrary or additional term or condition of Buyer’s order or any other document issued by Buyer.

**2. Price Adjustments; Payments.** Prices stated on the reverse side or preceding pages of this document are valid for 30 days. After 30 days, Seller may change prices to reflect any increase in its costs resulting from state, federal or local legislation, price increases from its suppliers, or any change in the rate, charge, or classification of any carrier. The prices stated on the reverse or preceding pages of this document do not include any sales, use, or other taxes unless so stated specifically. Unless otherwise specified by Seller, all prices are F.O.B. Seller’s facility, and payment is due 30 days from the date of invoice. After 30 days, Buyer shall pay interest on any unpaid invoices at the rate of 1.5% per month or the maximum allowable rate under applicable law.

**3. Delivery Dates; Title and Risk; Shipment.** All delivery dates are approximate and Seller shall not be responsible for any damages resulting from any delay. Regardless of the manner of shipment, title to any products and risk of loss or damage shall pass to Buyer upon tender to the carrier at Seller’s facility (i.e., when it’s on the truck, it’s yours). Unless otherwise stated, Seller may exercise its judgment in choosing the carrier and means of delivery. No deferment of shipment at Buyers’ request beyond the respective dates indicated will be made except on terms that will indemnify, defend and hold Seller harmless against all loss and additional expense. Buyer shall be responsible for any additional shipping charges incurred by Seller due to Buyer’s changes in shipping, product specifications or in accordance with Section 13, herein.

**4. Warranty.** Seller warrants that the Products sold here-under shall be free from defects in material or workmanship for a period of twelve months from the date of delivery to Buyer or 2,000 hours of normal use, whichever occurs first. This warranty is made only to Buyer and does not extend to anyone to whom Products are sold after purchased from Seller. The prices charged for Seller’s products are based upon the exclusive limited warranty stated above, and upon the following disclaimer: DISCLAIMER OF WARRANTY: THIS WARRANTY COMPRISES THE SOLE AND ENTIRE WARRANTY PERTAINING TO PRODUCTS PROVIDED HEREUNDER. SELLER DISCLAIMS ALL OTHER WARRANTIES, EXPRESS AND IMPLIED, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

**5. Claims; Commencement of Actions.** Buyer shall promptly inspect all Products upon delivery. No claims for shortages will be allowed unless reported to the Seller within 10 days of delivery.

No other claims against Seller will be allowed unless asserted in writing within 60 days after delivery or, in the case of an alleged breach of warranty, within 30 days after the date within the warranty period on which the defect is or should have been discovered by Buyer. Any action based upon breach of this agreement or upon any other claim arising out of this sale (other than an action by Seller for any amount due to Seller from Buyer) must be commenced within thirteen months from the date of tender of delivery by Seller or, for a cause of action based upon an alleged breach of warranty, within thirteen months from the date within the warranty period on which the defect is or should have been discovered by Buyer.

**6. LIMITATION OF LIABILITY.** UPON NOTIFICATION, SELLER WILL, AT ITS OPTION, REPAIR OR REPLACE A DEFECTIVE PRODUCT, OR REFUND THE PURCHASE PRICE. IN NO EVENT SHALL SELLER BE LIABLE TO BUYER FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF, OR AS THE RESULT OF, THE SALE, DELIVERY, NON-DELIVERY, SERVICING, USE OR LOSS OF USE OF THE PRODUCTS OR ANY PART THEREOF, OR FOR ANY CHARGES OR EXPENSES OF ANY NATURE INCURRED WITHOUT SELLER’S WRITTEN CONSENT, EVEN IF SELLER HAS BEEN NEGLIGENT, WHETHER IN CONTRACT, TORT OR OTHER LEGAL THEORY. IN NO EVENT SHALL SELLER’S LIABILITY UNDER ANY CLAIM MADE BY BUYER EXCEED THE PURCHASE PRICE OF THE PRODUCTS.

**7. Contingencies.** Seller shall not be liable for any default or delay in performance if caused by circumstances beyond the reasonable control of Seller.

**8. User Responsibility.** The user, through its own analysis and testing, is solely responsible for making the final selection of the system and Product and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application and follow applicable industry standards and Product information. If Seller provides Product or system options, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the Products or systems.

**9. Loss to Buyer’s Property.** Any designs, tools, patterns, materials, drawings, confidential information or equipment furnished by Buyer or any other items which become Buyer’s property, may be considered obsolete and may be destroyed by Seller after two consecutive years have elapsed without Buyer placing an order for the items which are manufactured using such property. Seller shall not be responsible for any loss or damage to such property while it is in Seller’s possession or control.

**10. Special Tooling.** A tooling charge may be imposed for any special tooling, including without limitation, dies, fixtures, molds and patterns, acquired to manufacture Products.

Such special tooling shall be and remain Seller’s property notwithstanding payment of any charges by Buyer. In no event will Buyer acquire any interest in apparatus belonging to Seller which is utilized in the manufacture of the Products, even if such apparatus has been specially converted or adapted for such manufacture and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller shall have the right to alter, discard or otherwise dispose of any special tooling or other property in its sole discretion at any time.

**11. Buyer’s Obligation; Rights of Seller.** To secure payment of all sums due or otherwise, Seller shall retain a security interest in the goods delivered and this agreement shall be deemed a Security Agreement under the Uniform Commercial Code. Buyer authorizes Seller as its attorney to execute and file on Buyer’s behalf all documents Seller deems necessary to perfect its security interest. Seller shall have a security interest in, and lien upon, any property of Buyer in Seller’s possession as security for the payment of any amounts owed to Seller by Buyer.

**12. Improper use and Indemnity.** Buyer shall indemnify, defend, and hold Seller harmless from any claim, liability, damages, lawsuits, and costs (including attorney fees), whether for personal injury, property damage, patent, trademark or copyright infringement or any other claim, brought by or incurred by Buyer, Buyer’s employees, or any other person, arising out of: (a) improper selection, improper application or other misuse of Products purchased by Buyer from Seller; (b) any act or omission, negligent or otherwise, of Buyer; (c) Seller’s use of patterns, plans, drawings, or specifications furnished by Buyer to manufacture Product; or (d) Buyer’s failure to comply with these terms and conditions. Seller shall not indemnify Buyer under any circumstance except as otherwise provided.

**13. Cancellations and Changes.** Orders shall not be subject to cancellation or change by Buyer for any reason, except with Seller’s written consent and upon terms that will indemnify, defend and hold Seller harmless against all direct, incidental and consequential loss or damage. Seller may change product features, specifications, designs and availability with notice to Buyer.

**14. Limitation on Assignment.** Buyer may not assign its rights or obligations under this agreement without the prior written consent of Seller.

**15. Entire Agreement.** This agreement contains the entire agreement between the Buyer and Seller and constitutes the final, complete and exclusive expression of the terms of the agreement. All prior or contemporaneous written or oral agreements or negotiations with respect to the subject matter are herein merged.

**16. Waiver and Severability.** Failure to enforce any provision of this agreement will not waive that provision nor will any such failure prejudice Seller’s right to enforce that provision in the future. Invalidation of any provision of this agreement by legislation or other rule of law shall not invalidate any other provision herein. The remaining provisions of this agreement will remain in full force and effect.

**17. Termination.** This agreement may be terminated by Seller for any reason and at any time by giving Buyer thirty (30) days written notice of termination. In addition, Seller may

by written notice immediately terminate this agreement for the following: (a) Buyer commits a breach of any provision of this agreement (b) the appointment of a trustee, receiver or custodian for all or any part of Buyer’s property (c) the filing of a petition for relief in bankruptcy of the other Party on its own behalf, or by a third party (d) an assignment for the benefit of creditors, or (e) the dissolution or liquidation of the Buyer.

**18. Governing Law.** This agreement and the sale and delivery of all Products hereunder shall be deemed to have taken place in and shall be governed and construed in accordance with the laws of the State of Ohio, as applicable to contracts executed and wholly performed therein and without regard to conflicts of laws principles. Buyer irrevocably agrees and consents to the exclusive jurisdiction and venue of the courts of Cuyahoga County, Ohio with respect to any dispute, controversy or claim arising out of or relating to this agreement. Disputes between the parties shall not be settled by arbitration unless, after a dispute has arisen, both parties expressly agree in writing to arbitrate the dispute.

**19. Indemnity for Infringement of Intellectual Property Rights.** Seller shall have no liability for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights except as provided in this Section. Seller will defend and indemnify Buyer against allegations of infringement of U.S. patents, U.S. trademarks, copyrights, trade dress and trade secrets (“Intellectual Property Rights”). Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on an allegation that a Product sold pursuant to this Agreement infringes the Intellectual Property Rights of a third party. Seller’s obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of such allegations of infringement, and Seller having sole control over the defense of any allegations or actions including all negotiations for settlement or compromise. If a Product is subject to a claim that it infringes the Intellectual Property Rights of a third party, Seller may, at its sole expense and option, procure for Buyer the right to continue using the Product, replace or modify the Product so as to make it noninfringing, or offer to accept return of the Product and return the purchase price less a reasonable allowance for depreciation. Notwithstanding the foregoing, Seller shall have no liability for claims of infringement based on information provided by Buyer, or directed to Products delivered hereunder for which the designs are specified in whole or part by Buyer, or infringements resulting from the modification, combination or use in a system of any Product sold hereunder. The foregoing provisions of this Section shall constitute Seller’s sole and exclusive liability and Buyer’s sole and exclusive remedy for infringement of Intellectual Property Rights.

**20. Taxes.** Unless otherwise indicated, all prices and charges are exclusive of excise, sales, use, property, occupational or like taxes which may be imposed by any taxing authority upon the manufacture, sale or delivery of Products.

**21. Equal Opportunity Clause.** For the performance of government contracts and where dollar value of the Products exceed \$10,000, the equal employment opportunity clauses in Executive Order 11246, VEVRAA, and 41 C.F.R. §§ 60-1.4(a), 60-741.5(a), and 60-250.4, are hereby incorporated.



**WARNING USER RESPONSIBILITY**

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyse all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalogue and in any other materials provided from Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

# Parker Worldwide

## Europe, Middle East, Africa

**AE – United Arab Emirates,** Dubai  
Tel: +971 4 8127100

**AT – Austria,** St. Florian  
Tel: +43 (0)7224 66201

**AZ – Azerbaijan,** Baku  
Tel: +994 50 2233 458

**BE/NL/LU – Benelux,** Hendrik Ido Ambacht  
Tel: +31 (0)541 585 000

**BY – Belarus,** Minsk  
Tel: +48 (0)22 573 24 00

**CH – Switzerland,** Etoy  
Tel: +41 (0)21 821 87 00

**CZ – Czech Republic,** Prague  
Tel: +420 284 083 111

**DE – Germany,** Kaarst  
Tel: +49 (0)2131 4016 0

**DK – Denmark,** Ballerup  
Tel: +45 43 56 04 00

**ES – Spain,** Madrid  
Tel: +34 902 330 001

**FI – Finland,** Vantaa  
Tel: +358 (0)20 753 2500

**FR – France,** Contamine s/Arve  
Tel: +33 (0)4 50 25 80 25

**GR – Greece**  
Tel: +30 69 44 52 78 25

**HU – Hungary,** Budaörs  
Tel: +36 23 885 470

**IE – Ireland,** Dublin  
Tel: +353 (0)1 466 6370

**IL – Israel**  
Tel: +39 02 45 19 21

**IT – Italy,** Corsico (MI)  
Tel: +39 02 45 19 21

**KZ – Kazakhstan,** Almaty  
Tel: +7 7273 561 000

**NO – Norway,** Asker  
Tel: +47 66 75 34 00

**PL – Poland,** Warsaw  
Tel: +48 (0)22 573 24 00

**PT – Portugal**  
Tel: +351 22 999 7360

**RO – Romania,** Bucharest  
Tel: +40 21 252 1382

**SE – Sweden,** Borås  
Tel: +46 (0)8 59 79 50 00

**SL – Slovenia,** Novo Mesto  
Tel: +386 7 337 6650

**TR – Turkey,** Istanbul  
Tel: +90 216 4997081

**UK – United Kingdom,** Warwick  
Tel: +44 (0)1926 317 878

**ZA – South Africa,** Kempton Park  
Tel: +27 (0)11 961 0700

## North America

**CA – Canada,** Milton, Ontario  
Tel: +1 905 693 3000

**US – USA,** Cleveland  
Tel: +1 216 896 3000

## Asia Pacific

**AU – Australia,** Castle Hill  
Tel: +61 (0)2-9634 7777

**CN – China,** Shanghai  
Tel: +86 21 2899 5000

**HK – Hong Kong**  
Tel: +852 2428 8008

**IN – India,** Mumbai  
Tel: +91 22 6513 7081-85

**JP – Japan,** Tokyo  
Tel: +81 (0)3 6408 3901

**KR – South Korea,** Seoul  
Tel: +82 2 559 0400

**MY – Malaysia,** Shah Alam  
Tel: +60 3 7849 0800

**NZ – New Zealand,** Mt Wellington  
Tel: +64 9 574 1744

**SG – Singapore**  
Tel: +65 6887 6300

**TH – Thailand,** Bangkok  
Tel: +662 186 7000

**TW – Taiwan,** Taipei  
Tel: +886 2 2298 8987

## South America

**AR – Argentina,** Buenos Aires  
Tel: +54 3327 44 4129

**BR – Brazil,** Sao Jose dos Campos  
Tel: +55 080 0727 5374

**CL – Chile,** Santiago  
Tel: +56 22 303 9640

**MX – Mexico,** Toluca  
Tel: +52 72 2275 4200

**European Product Information Centre**  
**Free phone: 00 800 27 27 5374**  
(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

Your local authorized Parker distributor

