LOW-FLOW PRESSURE REGULATOR



• Gas • Liquid

DiaphragmPiston



Non-Venting

Max Inlet: 414 bar (6,000 psi)

Max Outlet: 35 bar (510 psi)

Cv 0.06





INTRODUCING THE LF310...

The LF310 is a single-stage diaphragm-sensed pressure regulator for applications that require higher supply pressures in addition to an extended life cycle.

Based on the LF300, with its long-lasting Inconel® X750 diaphragm, the LF310 also offers a 'solid disk' seat design which is more robust for aggressive or high temperature applications.

SPECIFICATION

Max. Rated Inlet Pressure	414 bar (6,000 psi)
Outlet Ranges	Up to 35 bar (510 psi)
Design Proof Pressure	150% max. working pressure
Seat Leakage	In accordance with ANSI/FCI 70-3
Weight	0.9kg (2lbs)

STANDARD MATERIALS OF CONSTRUCTION

PART	MATERIALS
Body and Bonnet	ASTM A479 316/316L Stainless Steel (UNS S31600/S31603)
Main Valve Pin	ASTM A479 316/316L Stainless Steel
Soft Seat	PEEK™ (450G)
Soil Seal	PCTFE (Kel-F)
Valve Spring	Inconel® X750 (UNS N07750)
Diaphragm	Inconel® X750 (UNS N07750)
Handwheel	Nylon
O-Rings	FKM/FPM (Viton)
Loading Spring	ASTM A240 301 Stainless Steel (UNS S30100)
Filter	40 Microns

Note: Pressure regulator rating may be limited by connection type. Cy and/or seat material. Contact the office for specific pressure or temperature requirements.

FEATURES AND BENEFITS

1 INCONEL® X750 DIAPHRAGM

For ultimate strength and reliability on clean or corrosive applications.

316SS THREADED **2** 31655 1... BONNET

> For panel mounting option as standard.

40 MICRON INLET FILTER

> First stage soft seat protection from system contamination.

SOLID DISK SEAT DESIGN

> Robust design enabling higher inlet pressures of up to 414 bar (6,000 psi).

oduct availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.





PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

+44 (0)1457 899 307

E sales@pressure-tech.com

W www.pressure-tech.com

LOW-FLOW PRESSURE REGULATOR



• Gas • Liquid

DiaphragmPiston



Non-Venting


Max Inlet: 414 bar (6,000 psi)


Max Outlet: 35 bar (510 psi)

Cv 0.06


DRAWINGS AND INSTALLATION DIMENSIONS

Dimensions shown for 1/4" NPT option and standard configurations only - please contact the office for other options.

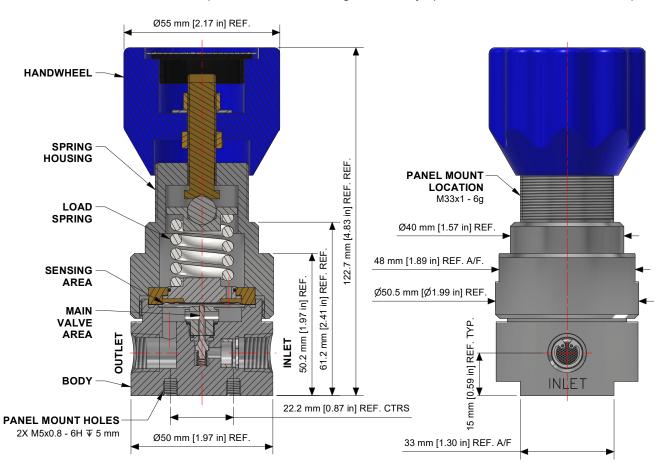




PANEL CUTOUT Note: All gauge ports are 1/4" NPT as standard.



PANEL MOUNT RING (PT-C-024) STAÌNLESS STEEL



roduct availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements



PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

+44 (0)1457 899 307

sales@pressure-tech.com W www.pressure-tech.com

LOW-FLOW PRESSURE REGULATOR



• Gas • Liquid

Diaphragm

Piston

Self-Venting


Non-Venting

Max Inlet: 414 bar (6,000 psi)


Max Outlet: 35 bar (510 psi)

Cv 0.06



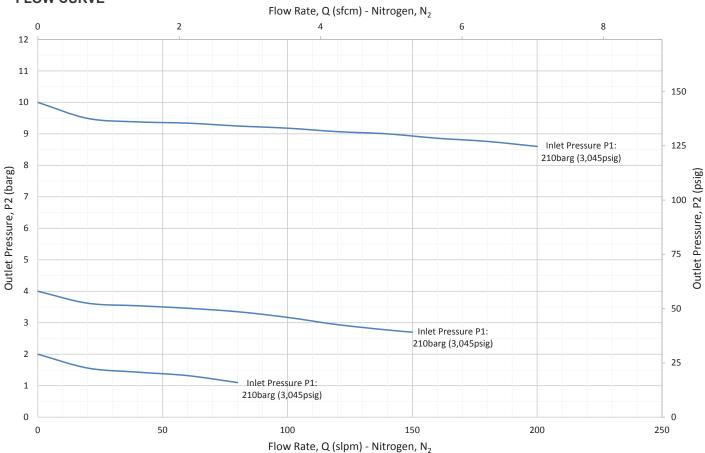

PORTING CONFIGURATIONS

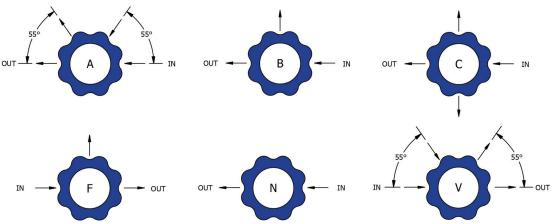

Note:

Additional porting configurations are available - please contact the office for further information.

Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements



PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

- +44 (0)1457 899 307
- sales@pressure-tech.com W www.pressure-tech.com

LOW-FLOW PRESSURE REGULATOR



• Gas • Liquid

DiaphragmPiston





Non-Venting


Max Inlet: 414 bar (6,000 psi)

Max Outlet: 35 bar (510 psi)

Cv 0.06

ORDERING INFORMATION

To build a Pressure Tech part number, simply combine the characters identified below in sequence:

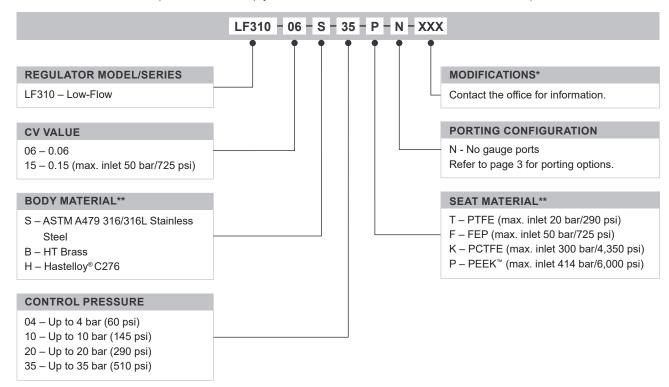

	PART NUMBER	DESCRIPTION	
Service Kit	SRK-LF310-06-U-K-M2-V	PCTFE seat and FKM/FPM seals	
Service Kit	SRK-LF310-06-U-P-M2-V	PEEK [™] seat and FKM/FPM seals	
Panel Mounting Ring	PT-C-024	-	

TRADEMARKS: PEEK™ is a trademark of Victrex PLC

Inconel® is a registered trademark of Inco Alloys International Hastellov® is a registered trademark of Havnes International. Inc

- * Where applicable
- ** Other materials may be available please contact the office

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements





Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

- T +44 (0)1457 899 307

E sales@pressure-tech.com W www.pressure-tech.com